


# 2008 Santa Barbara County Groundwater Report

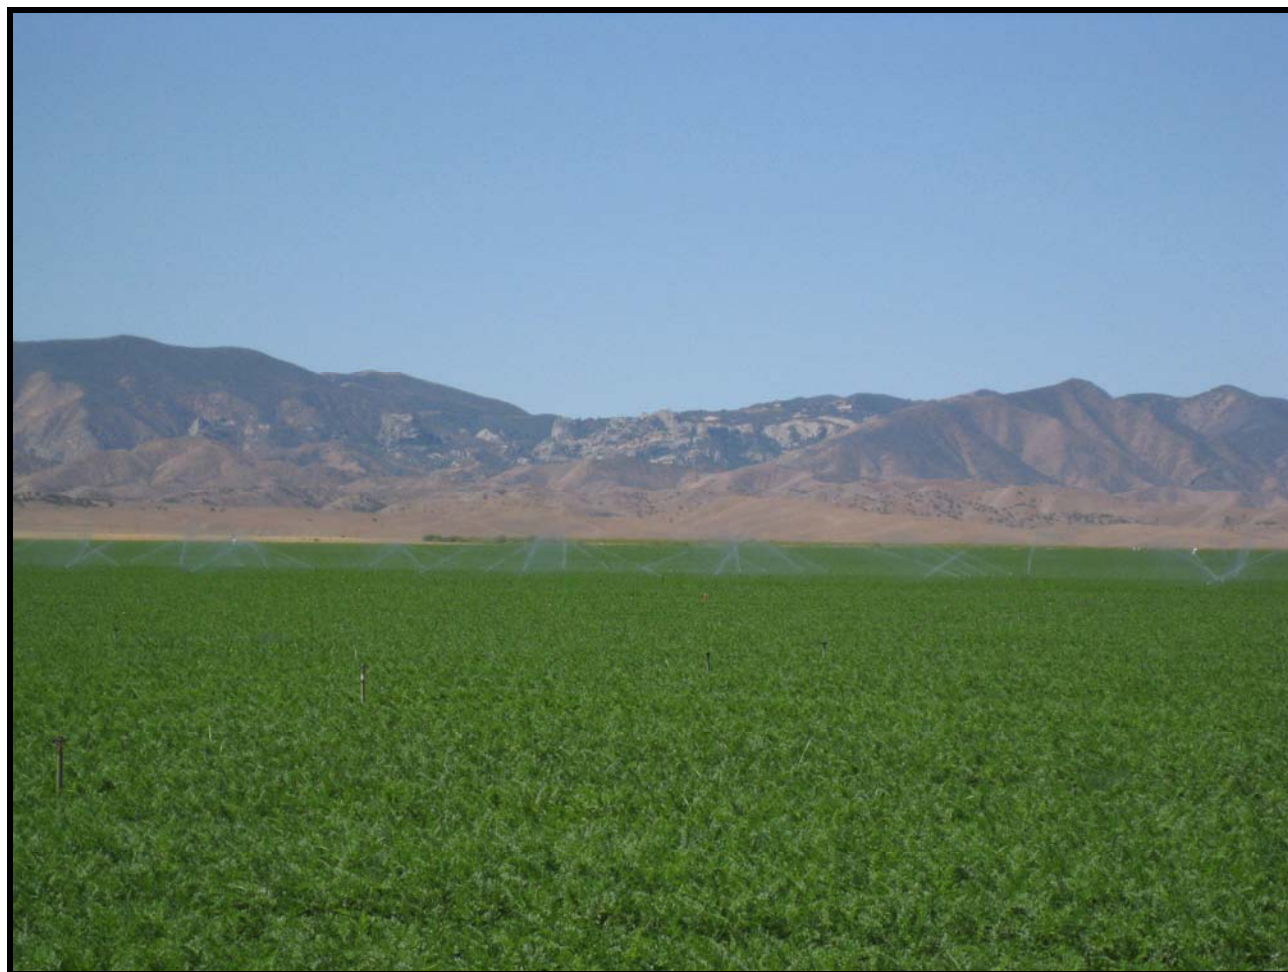

**Santa Barbara County Public Works Department  
Water Resources Division  
*Water Agency***

123 East Anapamu Street  
Santa Barbara, CA 93101  
(805) 568-3440

December 1, 2009

A report on the conditions of groundwater and the status of groundwater basins throughout Santa Barbara County during the calendar years 2006-2008

*On the Cover:*

*Carrots being irrigated in the Cuyama Valley with Lion Canyon  
in the background*

# 2008 Santa Barbara County Groundwater Report

**Santa Barbara County Public Works Department  
Water Resources Division  
*Water Agency***

123 East Anapamu Street  
Santa Barbara, CA 93101  
(805) 568-3440

December 1, 2009

Board of Directors

Salud Carbajal	1st District
Janet Wolf, Vice Chair	2nd District
Doreen Farr	3rd District
Joni Gray	4th District
Joseph Centeno, Chair	5th District

**Report Prepared By**

Dennis Gibbs  
Senior Hydrologist  
Registered Hydrologist 08-H-1828

**Under Direction Of**

Matt Naftaly  
Water Agency Manager

805-568-3440  
805-568-3434 fax  
<http://www.countyofsb.org/pwd/water/>

## Forward

This report satisfies requirements of the Santa Barbara County Comprehensive Plan, Conservation Element, Groundwater Resources Section that was adopted May 24, 1994, and amended November 8, 1994.

Specifically, Conservation Element Goal 4, Policy 4.1, Action 4.1.1 states that:

*The County Water Agency shall continue to monitor water levels from existing monitoring wells and, in coordination with the U.C. Cooperative Extension/Farm Advisor, shall request, on a voluntary basis, private and public water purveyors and major private groundwater users, including agricultural users, to provide periodic records of groundwater production. Unless deemed unnecessary by the Water Agency's Board of Directors for any year, the Agency shall compile an annual report on the status of pumping amounts, water levels, overdraft conditions, and other relevant data, and shall submit this report to the Board of Supervisors for its acceptance and possible further action. The annual report to the Board shall include a review of the results of all groundwater quality monitoring conducted in the County.*

In 2006 the Board of Supervisors concurred with staff recommendation to change the report from annual to tri-annual since groundwater conditions tend to change little on a year-by-year basis.

Upon completion of this report, the Water Agency will forward it to the County's Planning and Development Department to aid in land use decisions. According to Conservation Element Policy 3.2, "The County shall conduct its land use planning and permitting activities in a manner which promotes and encourages the cooperative management of groundwater resources by local agencies and other affected parties, consistent with the Groundwater Management Act and other applicable law." The tri-annual report is part of that effort but is not intended to be the sole basis for any land use decisions.

In addition, as other local agencies complete groundwater management plans, the Water Agency will review these plans and both forward salient information from those plans to the Planning and Development Department and reflect that information in the next groundwater report update. Conservation Element Policy 3.3 States, "The County shall use groundwater management plans, as accepted by the Board of Supervisors, in its land use planning and permitting decisions and other relevant activities."

The information and conclusions contained in this report reflect data developed by the Water Agency and data contained in documents and reports listed under References on page 98 in the rear of this report. The Water Agency recognizes that other individuals/agencies might reach different conclusions based on different sources of data or interpretations.

As Conservation Element Action 4.1.3 states, "The County recognizes the need for more accurate data on all groundwater basins within the County and shall continue to support relevant technical studies, as feasible". As a result, the Agency continues to gather water resources data through cooperative programs, and its own collection of data. Finally, as stated in the Conservation Element, "The County recognizes that it has no authority to regulate or manage the use of groundwater except as provided for in the Groundwater Management Act (*Water Code ss 10750. Et seq.*) and other applicable law. Further, the County does not assume any authority under this section to make a determination of the water rights of any person or entity".



## TABLE OF CONTENTS

<b>Executive Summary</b> .....	<b>1</b>
<b>Introduction</b> .....	<b>4</b>
<b>Groundwater Terms</b> .....	<b>5</b>
<b>Well Monitoring and Data Collection</b> .....	<b>6</b>
<b>State Water Project</b> .....	<b>8</b>
<b>Cloudseeding</b> .....	<b>14</b>
<b>Groundwater Basin Management Plans</b> .....	<b>16</b>
<b>Climate and General Hydrologic Trends</b> .....	<b>17</b>
<b>Geologic Setting</b> .....	<b>25</b>
<b>Major Water Bearing Geologic Formations of Santa Barbara County</b> .....	<b>25</b>
<b>Santa Barbara County Groundwater Basins</b> .....	<b>28</b>
<b>South Coast Groundwater Basins</b> .....	<b>29</b>
Carpinteria Groundwater Basin .....	30
Montecito Groundwater Basin .....	34
Santa Barbara Groundwater Basin.....	37
Foothill Groundwater Basin .....	40
Goleta Groundwater Basin .....	43
<b>Groundwater Basins of the Santa Ynez River Watershed</b> .....	<b>47</b>
Santa Ynez Uplands Basin.....	49
The Santa Ynez River Alluvial Groundwater Basin.....	55
Buellton Uplands Groundwater Basin .....	57
Lompoc Groundwater Basins .....	59
<b>San Antonio Groundwater Basin</b> .....	<b>66</b>
<b>Santa Maria Groundwater Basin</b> .....	<b>73</b>
<b>Cuyama Groundwater Basin</b> .....	<b>87</b>
<b>Other Groundwater Extraction Areas</b> .....	<b>95</b>
More Ranch Groundwater Basin .....	95
Ellwood to Gaviota Groundwater Area .....	95
Gaviota to Point Conception Groundwater Area .....	96
<b>Conclusions</b> .....	<b>97</b>
<b>References</b> .....	<b>98</b>
<b>Appendix A – Groundwater Monitoring Sites Listing</b> .....	<b>103</b>
<b>Appendix B - Santa Barbara County Water Production</b> .....	<b>109</b>
<b>Appendix C - Santa Barbara County Groundwater Basins Summary</b> .....	<b>111</b>

List of Figures for the 2008 Santa Barbara County Groundwater Report

Figure 1.	Current SBCWA Groundwater Observation Sites .....	6
Figure 2.	State Water Project.....	8
Figure 3.	State Water Project, Coastal Branch .....	9
Figure 4.	Santa Barbara County Cloudseeding Program Target Areas .....	15
Figure 5.	Santa Barbara Seasonal Precipitation 1868-2009.....	17
Figure 6.	Precipitation for Selected Stations .....	19
Figure 7.	Rainfall Cumulative Departure from Mean for Santa Barbara .....	21
Figure 8.	Cachuma Reservoir Storage 1985-2009 .....	22
Figure 9.	Santa Barbara County Groundwater Basins.....	28
Figure 10.	South Coast Groundwater Basins.....	29
Figure 11.	Carpinteria Groundwater Basin.....	30
Figure 12.	Hydrograph of State Well 4N/25W-29D1 .....	32
Figure 13.	Water Quality Graph for State Well 4N/25W-28E7 .....	33
Figure 14.	Montecito Groundwater Basin.....	34
Figure 15.	Hydrograph for State Well 4N/26W-8P3 .....	36
Figure 16.	Santa Barbara Groundwater Basin .....	37
Figure 17.	Hydrograph for State Well 4N/27W-15E1 .....	39
Figure 18.	Foothill Groundwater Basin .....	40
Figure 19.	Hydrograph for State Well 4N/28W-12H4.....	41
Figure 20.	Goleta Groundwater Basin.....	43
Figure 21.	Hydrograph for State Well 4N/28W-9J2.....	46
Figure 22.	Santa Ynez River Water Conservation District Boundaries.....	48
Figure 23.	Santa Ynez Uplands Groundwater Basin .....	49
Figure 24.	Agricultural Production Well 7N/30W-25Q2.....	51
Figure 25.	Hydrograph of State Well 7N/30W-33M2 .....	53
Figure 26.	Total Dissolved Solids for State Well 7N/30W-33M1.....	54
Figure 27.	Santa Ynez River Alluvial Groundwater Basin.....	56
Figure 28.	Buellton Uplands Groundwater Basin .....	57
Figure 29.	Lompoc Area Groundwater Basins .....	59
Figure 30.	Aerial Image of the Lompoc, Lompoc Uplands and Santa Rita Area .....	61
Figure 31.	Typical Mixture of Agriculture in the Lompoc Plain.....	62
Figure 32.	TDS and Sulfate for State Well 7N/34W-27P5 .....	63
Figure 33.	TDS for State Well 7N/34W-15E1.....	64
Figure 34.	San Antonio Groundwater Basin.....	66
Figure 35.	San Antonio Valley Land Use .....	68
Figure 36.	Los Alamos Cumulative Departure from Mean.....	69
Figure 37.	Locations of Monitoring in the San Antonio Groundwater Basin .....	71
Figure 38.	TDS and Sulfate for State Well 8N/32W-30E6 .....	72
Figure 39.	Distribution of Groundwater Monitoring in the Santa Maria Valley .....	74
Figure 40.	Santa Maria Agriculture and Petroleum Operations .....	76
Figure 41.	Hydrograph for State Well 10N/34W-14E5.....	77
Figure 42.	Spring 2004 GW Level Contours for the SM Groundwater Basin .....	78
Figure 43.	TDS in the Santa Maria Groundwater Basin 1958-2007 .....	82
Figure 44.	Chloride Concentrations for State Wells 10N/36W-2Q3-7 .....	84
Figure 45.	Santa Maria Groundwater Basin Different Units .....	85
Figure 46.	The Cuyama Valley.....	87
Figure 47.	Alfalfa with the Caliente Mountains in the Background.....	88
Figure 48.	Hydrograph of State Well 10N/26W-15N1 .....	89
Figure 49.	TDS for State Wells 9N/24W-33M1 and 10N/25W-20H1 .....	90
Figure 50.	Boron for State Wells 10N/26W-9R3 and 10N/25W-20H1 .....	90
Figure 51.	Aerial Photograph of the Cuyama River Valley .....	92
Figure 52.	Cuyama Groundwater Basin.....	94

List of Tables for the 2008 Santa Barbara County Groundwater Report

Table 1.	State Water Project Allocations .....	11
Table 2.	State Water Project Deliveries 2005-2008.....	13
Table 3.	Groundwater Management Plans .....	16
Table 4.	Santa Ynez Uplands and Riparian Pumping 2006-2008 .....	52
Table 5.	San Antonio Basin Hydrologic Budget .....	70
Table 6.	Historical Water Budget Analyses for the Santa Maria Basin.....	77
Table 7.	1990-2008 Santa Maria Groundwater Basin Production .....	80
Table 8.	Water Quality Monitoring Sites in the Santa Maria Valley .....	83
Table 9.	Santa Maria Watershed Precipitation 2006-2008 .....	84
Table 10.	Cuyama Valley Precipitation 2006-2008.....	91

## Executive Summary

### Climate

1. Rainfall during the 2006-2008 period was 84% of average countywide and produced only very small amounts of recharge to groundwater basins and inflow to reservoirs. The 2005-2006 Winter produced 115% of normal rainfall, the very dry 2006-2007 Winter produced only 36% of normal and the 2007-2008 Winter produced 102% of normal precipitation. It is important to note that average rainfall does not typically produce significant recharge. The last abundant year of recharge year was 2005 which produced 188% of normal rainfall. A detailed description of climate from late 2005 through 2008 is included on pages 17-24.

### Status of Groundwater Basins

1. The Cuyama Groundwater Basin is in a state of overdraft of 28,525 Acre-Feet per year based on a 1992 study. This overdraft pertains to Safe Yield and not Perennial Yield. Water levels have fallen significantly but no regional economic or water quality problem has yet been documented. In 2008 the Water Agency initiated a detailed water availability study in conjunction with the United States Geological Survey which will result in a published report in 2012. For more information on this basin and study please see page 87. For definitions of Safe Yield and Perennial Yield see page 5.
2. The Santa Maria Groundwater Basin within Santa Barbara County and also that area within San Luis Obispo County known as the *Oso Flaco* unit has been calculated by the County Water Agency to be in overdraft of 2,368 Acre-Feet per year based on a 2001 study. This overdraft pertains to Safe Yield and not Perennial Yield. Water levels have declined since agricultural development of the basin began but no regional economic or water quality problem has yet been documented. In the recent litigation *Santa Maria Valley Water Conservation District versus the City of Santa Maria et al.* the court ruled that based on a preponderance of evidence the groundwater basin is not currently in a state of overdraft. No "Safe Yield" number for groundwater extraction has been decided upon through the adjudication and thus it is Water Agency opinion that no further Santa Barbara County study is warranted at this time based on this "tentative" decision. For more information on this basin please see page 73.
3. The San Antonio Groundwater Basin is in a state of overdraft of 9,540 Acre-Feet per year based on a 2003 study. This overdraft pertains to Safe Yield and not Perennial Yield. Water levels have fallen significantly but no

regional economic or water quality problem has yet materialized. For more information on this basin please see page 66.

4. The Lompoc Plain Groundwater Basin is basically in equilibrium under State of California Water Resources Control Board decision WR 89-18 and management by the Santa Ynez River Water Conservation District as natural recharge is augmented with periodical water releases that are made from Cachuma Reservoir to maintain ground water levels in the basin. For more information on this basin please see page 59.
5. The Lompoc Uplands Groundwater Basin has apparently reached equilibrium as over time water levels have been lowered to approach the elevation of the Lompoc Plain and Santa Ynez River, which now regulate the water levels in the Uplands Basin. For more information on this basin please see page 60.
6. The Santa Rita Sub-area of the Lompoc Uplands Groundwater Basin is in a state of overdraft of 799 Acre-Feet per year based on a 2001 study. This overdraft pertains to Safe Yield and not Perennial Yield. However, water levels in some parts of this area have declined significantly in recent years and thus in the future some adverse economic effects may be realized as the balance between energy costs and commodity prices fluctuate. For more information on this basin please see pages 60.
7. The Buellton Uplands Groundwater Basin is in a state of surplus of 800 Acre-Feet per year based on a 1995 study. For more information on this basin please see page 57.
8. The Santa Ynez Uplands Groundwater Basin is in a state of overdraft of 2,028 Acre-Feet per year based on a 2001 study. This overdraft pertains to Safe Yield and not Perennial Yield, thus water levels have declined in many areas but no regional economic or water quality problem has yet materialized. For more information on this basin please see page 49.
9. The South Coast Basins are in equilibrium or surplus through management by local water districts and the Wright Settlement. For more information on these basins please see pages 29-46.

### **Considerations**

1. Santa Barbara County is situated at latitude 34<sup>o</sup>-35<sup>o</sup> north in a *semi-arid* climate belt and as such is susceptible to prolonged wet and dry periods such as the wet period 1991-2001 and the droughts of 1945-1951 and 1987-1990. Thus, analysis of groundwater basins must consider long-term climate and cannot be made year by year. For more information please see the Climate and General Hydrologic Trends section on pages 17-24.

2. Recharge from precipitation and stream seepage is the dominant parameter in the calculation of the status of a groundwater basin (surplus, equilibrium, or overdraft). Selection of “base period” of climate (recharge) can substantially alter the outcome of such a calculation. The Water Agency uses the longest period of record available which covers both wet and dry periods when evaluating the status of a groundwater basin.

## Introduction

Groundwater supplies about 77% percent of Santa Barbara County's domestic, commercial, industrial and agricultural water. It is also the last line of defense against the periodic droughts that occur in the County. Historic records, combined with tree ring analyses indicate that local drought periods of several years or longer have occurred two to four times per century over the last 460 years (Turner, 1992).

To better understand the supply and limitations of each groundwater basin and aquifer, local, state and federal agencies regularly monitor water quantity and quality. This information about our groundwater resources is essential for a thorough understanding of the condition of the aquifers and thereby can help avoid overuse of aquifers which can lead to depletion, seawater intrusion, diminished storage capacity, lower water quality, or land subsidence within a basin. These potential consequences depend on the characteristics of the aquifer. In areas with low recharge rates, excessive pumping might render portions of an aquifer unusable indefinitely. The lowering of water tables might increase pumping "lifts" which could make pumping economically infeasible for some existing uses. In contrast, with proper management the lowering of groundwater basins can sometimes make them more effective by reducing rejected recharge. Since the consequence of long-term groundwater overuse can include permanent impairment of aquifers, careful evaluation of long-term records of use and groundwater response is essential to successful management of groundwater supplies.

In Santa Barbara County significant changes in groundwater basins generally occur over a period of years, or in some cases decades. In larger basins, trends in groundwater level and groundwater quality are recognizable only by examining data the length of one or more hydrologic (rainfall) cycles. Some factors likely to affect the condition of the basins, such as the importation of supplemental water supplies, the implementation of basin management plans, and climatic influences, may change from year to year.

Because of these concerns and various studies indicating slight to moderate levels of overdraft in several groundwater basins within the County and substantial overdraft in one basin, the County developed a set of goals and policies to protect local groundwater. These goals and policies are contained in the Santa Barbara County Comprehensive Plan, Conservation Element, Groundwater Resources Section, which was formally adopted on November 8, 1994. The effects of County permitted projects which may involve new extractions of water resources are evaluated under the California Environmental Quality Act pursuant to the adopted Environmental Thresholds and Guidelines Manual, 1995, and assessed for consistency with County Land Use Plan policy.

Included in this tenth groundwater report is a discussion of climate through late 2008 and its likely effect on groundwater basin conditions, a general discussion of basin characteristics and current statuses, updated water level data and hydrographs for selected wells, and developments in supplemental supplies and basin management plans.

## Groundwater Terms

There are several terms used in this report that warrant definition. **Safe Yield** is defined as the maximum amount of water which can be withdrawn from a basin (or aquifer) on an average annual basis without inducing a long-term progressive drop in water level. **Perennial Yield** is defined as the amount of water that can be withdrawn from a basin (or aquifer) on an average annual basis without inducing economic or water quality consequences (Muir, 1964). **Net Yield** is the Safe Yield value with the Return Flows subtracted. The Net Yield value refers to consumptive use of water that can be removed (without accounting for Return Flows) on an average annual basis without causing severe adverse affects. The Perennial Yield value is always greater than the Net Yield value. **Return Flows** consist of water that has been rejected from evapotranspiration and thus is returned to the groundwater basin.

**Overdraft** is defined as the level by which long-term average annual demand exceeds the estimated Safe Yield of the basin and thus, in the long term, may result in significant negative impacts on environmental, social or economic conditions. A basin in which Safe Yield is greater than estimated average annual pumpage is defined as being in a state of **Surplus**. The term Overdraft does not apply to a single year or series of a few years, but to a long-term trend extending over a period of many years that are representative of long-term average rainfall conditions. Thus, the estimated overdraft accounts for both drought periods and periods of heavy rainfall.

**Available Storage** is the volume of water in a particular basin that can be withdrawn economically without substantial environmental effects. This storage value reflects the amount of water in the basin on a long-term basis (a point on a long-term trend line of water levels), not the current storage level in the basin. **Usable Storage** or **Working Storage** of a groundwater basin is defined as the volume of water to the bottom of developed wells.

The term **Confined** is used to describe an aquifer, the upper surface of which is overlain by an impermeable layer that prevents any significant upward flow when the aquifer is totally saturated (filled) with water. When this type of aquifer is penetrated by a well the water in the well may rise above ground surface, due to the pressure head exerted on the aquifer, and if so may be described as **Artesian**.

**Recharge** is the sum of water entering the aquifer from direct deep **percolation** of rainfall, **seepage** from streams and rivers and Return Flows from irrigation. It is rainfall less losses of evaporation, evapotranspiration, diversion and outflow of the basin. It is the dominant parameter in the calculation of the status of a groundwater basin (surplus, equilibrium or overdraft). Data on actual net recharge by stream seepage and deep percolation of rainfall is very limited and thus is usually estimated or prorated from adjacent areas or historical studies. By utilizing differing "base periods" of climate (recharge) one can easily alter the outcome of the calculation of the status of a particular groundwater basin.



## Well Monitoring and Data Collection

The Santa Barbara County Water Agency (SBCWA) currently monitors 283 wells for depth to groundwater throughout the County in cooperation with the United States Geological Survey (USGS). 27 sites include water quality. Individual water districts monitor many more wells. The illustration below indicates the locations of SBCWA observation wells.

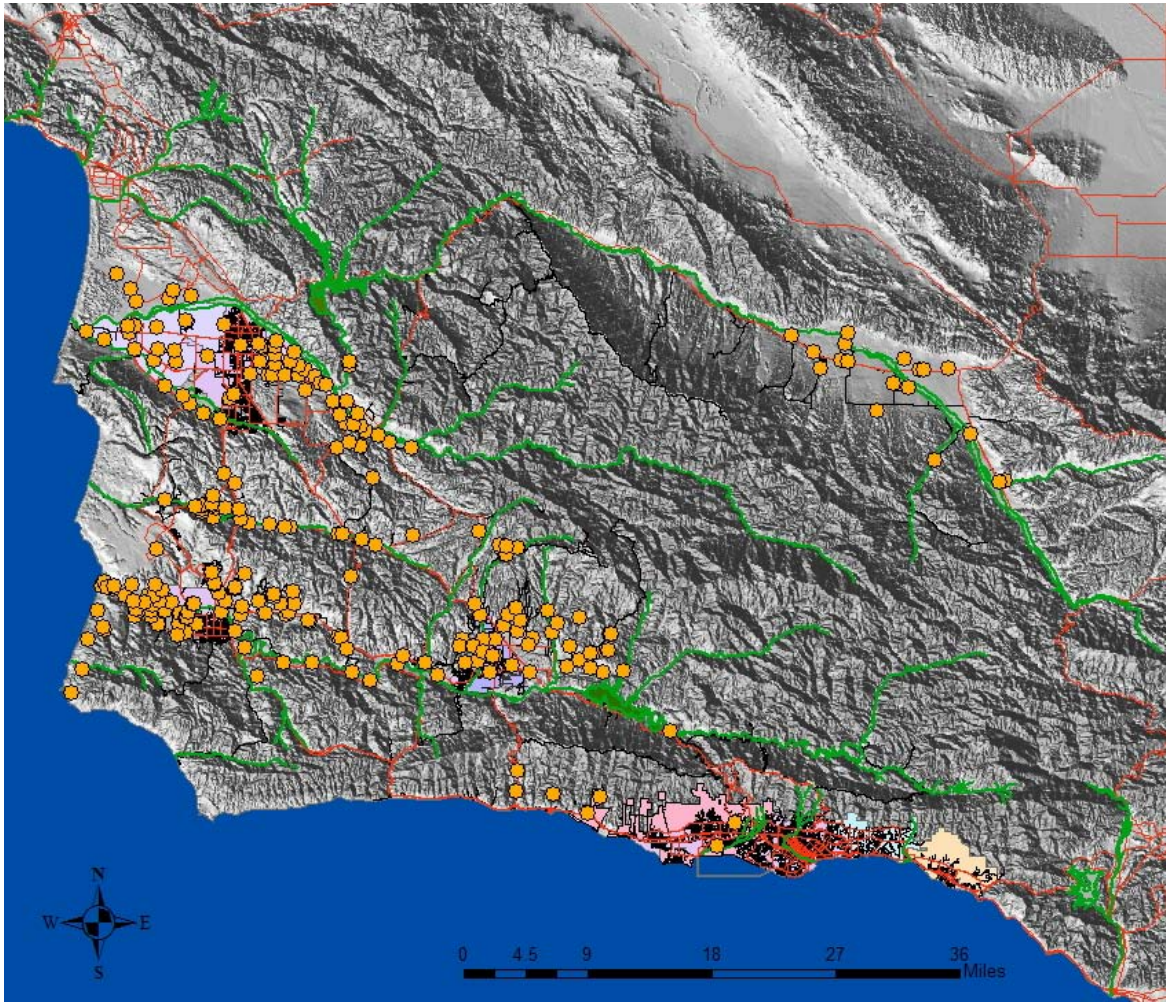


Figure 1: Current SBCWA Groundwater Observation Sites

Appendix A on page 103 in the rear of this report contains a table which cross references State Well ID to the USGS Site ID. Data from any of these monitoring sites may be retrieved at <http://nwis.waterdata.usgs.gov/usa/nwis/gwlevels> by querying on site ID. Note that nearly all of the SBCWA groundwater monitoring sites exist within the unincorporated areas of Santa Barbara County. Local water districts and municipalities currently monitor or fund monitoring of many sites in addition to those measured by Santa Barbara County. Those include the Carpinteria Valley Water District, the Montecito Water District, the City of Santa Barbara, the Goleta Water District, the Santa Ynez River Water Conservation District ID#1, the United States Bureau of Reclamation, the City of Solvang, the City of Buellton, the City of Lompoc, the Los Alamos Community

Service District, the City of Santa Maria, the Santa Maria Valley Water Conservation District, Golden State Water Company, the City of Guadalupe and the New Cuyama Community Services District. For specific information in those areas contact the appropriate Water District or Agency directly.

### ***Water Quality Data Collection***

Although partially funded through SBCWA programs, groundwater quality data is not collected directly by the SBCWA. Much of the data used in this report comes from the USGS, the Regional Water Quality Control Board, or local water agencies. This report discusses total dissolved solids (TDS) as an indication of general water quality, nitrates as an indication of possible return flow contamination and chlorides as an indication of possible seawater intrusion.

### ***Data Collection Methodology***

The majority of the representative wells used to create the hydrographs displayed in this report are currently measured by the Water Agency. For these wells, groundwater depth is measured directly, one or two times per year, using a graduated steel tape. If conditions in a well preclude the use of the steel tape (such as a leaking casing) an electric sounder is used. Under ideal conditions, it has been the experience of Water Agency personnel that the steel tape is accurate to within two or three one hundredths of a foot. The accuracy of the electric sounder used by the Water Agency has been found to be somewhat less, typically five one hundredths of a foot.

Other methods for acquiring well measurements might include water stage (float) recorders that record water depths on graphs or punched tape. Stage recorders most often consist of a float and pulley device inserted into a well. Similarly, airline systems measure the pressure required to bubble gas out of a tube, the bottom of which is inserted below water in the well. If the precise elevation of the lower end of the tube is known, it is possible to determine the water depth. However, this method might only have an accuracy of plus or minus a foot (or more) depending on the accuracy of the pressure gage. More recently, pressure transducers have been installed on several wells which can relate depth to water by the hydrostatic pressure caused by the column of water above the instrument minus atmospheric pressure.

### ***Geographic Information System***

SBCWA has developed a GIS (geographic information system) to track and record groundwater data, and for analyzing and displaying historical groundwater data. The GIS system serves as an extensive database of all of the water well records as well as a good way to produce maps.

### ***Drinking Water Standards***

The following standards are provided for comparison purposes: the California Department of Health Services (DHS) secondary standard for total dissolved solids (TDS) in drinking water is 1,000 milligrams per liter (mg/l), maximum contaminant level. Secondary standards are applied at the point of delivery to the consumer. The DHS primary standard for nitrates (as NO<sub>3</sub>) in public drinking water systems is 45 mg/l and the DHS secondary standard for chloride in drinking water is 250 mg/l. DHS is in charge

of "Source Water Assessments" and they are required of all "public water supplies" (with over 200 connections). For more information on the Drinking Water Source Assessment and Protection (DWSAP) Program please visit the DHS website at [www.dhs.ca.gov/ps/ddwem/dwsap/guidance/index.htm](http://www.dhs.ca.gov/ps/ddwem/dwsap/guidance/index.htm).

## State Water Project

The State Water Project (SWP) depends on a complex system of dams, reservoirs, power plants, pumping plants, canals, and aqueducts to deliver water from the watersheds of the Sierra Nevada Mountains via the Sacramento-San Joaquin Delta. Although initial transportation facilities were essentially completed in 1973, other facilities have since been built, and still others are either under construction or are planned to be built as needed. The SWP facilities include 28 dams and reservoirs, 26 pumping and generating plants, and approximately 660 miles of aqueducts.



Figure 2: State Water Project (Courtesy of the California Department of Water Resources)

Existing long-term SWP water supply contracts call for a maximum annual allocation of approximately 4.1 million acre-feet. A number of changes have occurred since the long-

term water contracts were signed in the 1960s. These changes include population growth variations, differences in local use, local water conservation programs, and conjunctive-use programs. Demands for SWP water are expected to increase as the population of California continues to increase. Water from rainfall and snowmelt runoff is stored in SWP conservation facilities and delivered via SWP transportation facilities to water agencies and districts in Southern California, Central Coastal, San Joaquin Valley, South Bay, North Bay, and Upper Feather River areas.

**Santa Barbara County Involvement in the SWP**

In 1963, the Santa Barbara County Flood Control and Water Conservation District contracted with the California Department of Water Resources (DWR) to deliver SWP water. At that time, the County began payments to DWR to retain a share of the SWP yield (“Table A amount”)<sup>1</sup> for 57,700 Acre-Feet per Year (AFY), but funds were not allocated to construct the necessary local facilities to deliver water within the county.

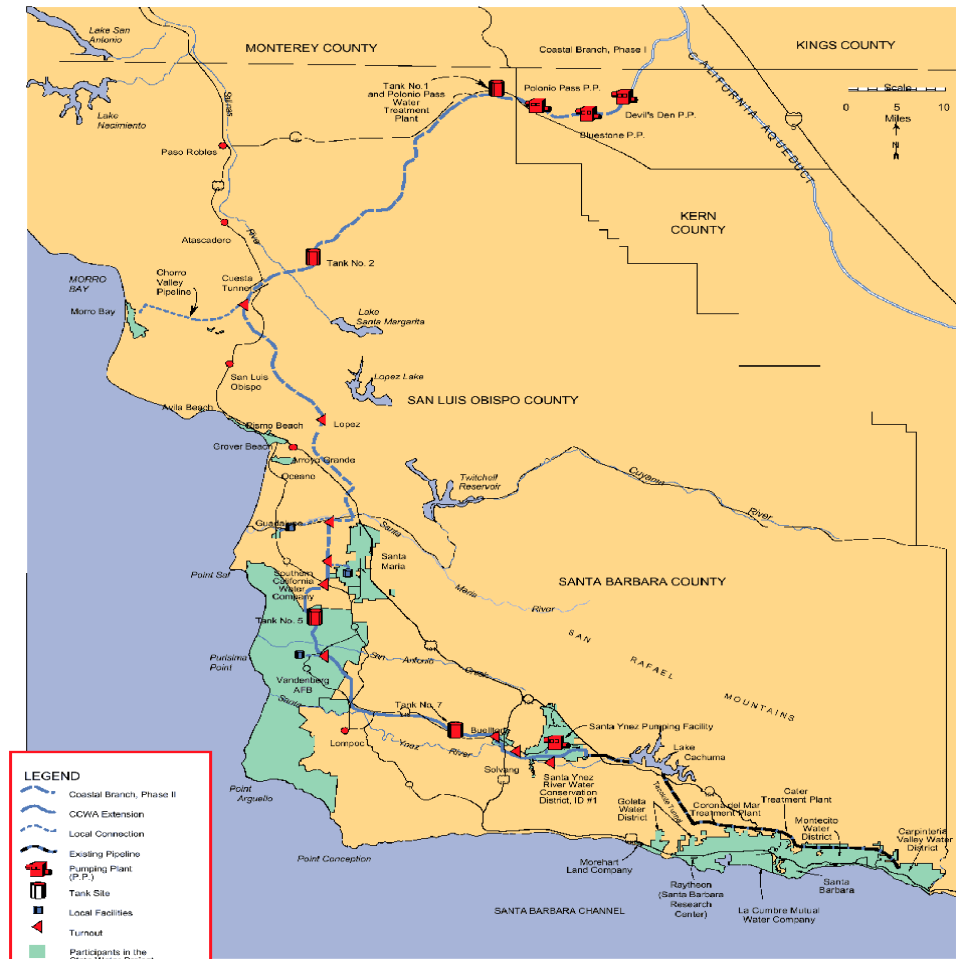


Figure 3: State Water Project, Coastal Branch

<sup>1</sup>SWP contract Article 7b *Maximum Annual Entitlement of Agency*. The maximum amount of project water to be made available to the Agency in any one year under this contract shall be that specified in Table A of this contract and in said table designated as the Agencies Maximum Annual Entitlement.



In 1979, a bond measure was placed before local voters to secure funds to construct the local delivery system to distribute SWP water throughout the County. Fear of growth, environmental concerns, and opposition to the high water costs caused a majority of voters to vote against this measure. In 1981, the original contract was amended to reduce the County's State Water Table A amount to 45,486 AFY.

In 1991, after four years of extremely dry conditions, voters in several service areas in Santa Barbara County voted to import SWP water. This included the communities of Carpinteria, Summerland, Montecito, Santa Barbara, Hope Ranch, Goleta, Buellton, Solvang, Santa Ynez, Orcutt and Guadalupe. The Santa Maria City Council and Vandenberg Air Force Base also decided to participate in the SWP. The communities of Lompoc, Vandenberg Village, and Mission Hills voted not to participate in the SWP.

After the bond elections, water purveyors participating in the SWP formed the Central Coast Water Authority (CCWA) to finance, construct, manage, and operate Santa Barbara County's 42-mile extension of the SWP water pipeline, the State facilities in Santa Barbara and San Luis Obispo Counties, and a regional water treatment plant. The CCWA is made up of eight member agencies, one associate member, and four additional participants. An eight-member Board of Directors that includes a representative from each member agency governs the CCWA.

The table on the following page exhibits the allocated Table A Amount of SWP water to each project participant. Existing allocations range from 50 AFY (Raytheon IO) to as high as 16,200 AFY (City of Santa Maria), though actual water deliveries may be less than the Table A Amounts in any given year depending on a number of factors, including customer demand, regulatory restrictions and droughts in northern California. Factors other than drought that may cause short-term delivery reductions of SWP water include equipment failure and natural disasters such as floods and earthquakes.

<b>State Water Allocations in Santa Barbara County</b>		
<b>Project Participant</b>	<b>SWP Allocation (AFY)</b>	<b>Drought Buffer (AFY)</b>
Golden State Water Company	500	50
Carpinteria Valley Water District	2,000	200
City of Buellton	578	58
City of Guadalupe	550	55
City of Santa Barbara	3,000	300
City of Santa Maria	16,200	1,620
City of Solvang	1,500	0
Goleta Water District**	4,500	450*
La Cumbre Mutual Water Co.	1,000	100
Montecito Water District	3,000	300
Morehart Land Company	200	20
Raytheon Infrared Operations	50	5
Santa Ynez River Water Conservation District ID#1	500	200
Vandenberg Air Force Base	5,500	550
<b>Total:</b>	<b>39,078</b>	<b>3,908</b>

Table 1: State Water Project Allocations

\* *Goleta has an additional 2,500 AFY of drought buffer, in addition to its 450 AFY, Drought buffer does not have a pipeline or treatment plant capacity associated with it, thus it serves for increased reliability only*

### ***Project Reliability***

Factors that affect the State Water Project's long-term reliability include timing of additional SWP storage facility construction, ongoing environmental challenges to the SWP, and eventual utilization of full SWP entitlement by other SWP water contractors. Current expectations are that some of the originally conceived SWP facilities will not be constructed so the final overall SWP yield may be reduced. In addition, since recent laws have required that more water than originally planned must be retained in the supply rivers to preserve aquatic and riparian habitats, the overall SWP yield may be reduced still further. According to the CALSIM II SWP yield model developed by DWR, the long-term average SWP deliveries will average approximately 70 percent of the SWP Table A Amounts with existing facilities and current operational constraints. Each CCWA participant has a 10% "Drought Buffer" intended to further increase SWP reliability. Therefore, for its land use planning purposes, the County assumes the long-term average annual deliveries to be 75% of each purveyor's Table A Amount.

### ***Santa Barbara County Deliveries***

Santa Barbara County SWP deliveries began in 1997. These deliveries have had a significant impact on groundwater conditions in some Santa Barbara County groundwater basins by reducing overdraft and improving groundwater quality. In some areas, State Water has replaced a significant amount of groundwater production and, because the quality of State Water is better than that of most local groundwater sources, Return Flows to groundwater basins will help improve basin water quality over time.

Annual State Water deliveries vary based on local demand, availability of SWP water due to snow-pack and runoff in the State Water Project watersheds, and environmental factors. Total statewide requests for delivery may exceed the systems ability to deliver in certain years. See reliability section above. Therefore, historic deliveries listed in Table 2 on the following page may not accurately reflect delivery capability in all years, but drought buffer programs, exchanges, transfers, off site storage and conjunctive use programs increase the reliability of State Water deliveries.

For the above mentioned reasons the amount of State Water offsetting groundwater consumption and the amount returning to groundwater basins is not fully known and thus in the short term, it is difficult to determine to what extent existing overdraft of groundwater supplies may be alleviated. However, for basins in which the use of State Water supplies is substantial compared to the use of groundwater, the benefit is likely to be significant.

Table 2 on the following page shows the deliveries of State Water to which local entities have received during the 2005-2008 period:

State Water Project Deliveries <sup>1</sup> 2005-2008 (Acre-Feet)				
Project Participant	Calendar Year <b>2005</b>	Calendar Year <b>2006</b>	Calendar Year <b>2007</b>	Calendar Year <b>2008</b>
City of Santa Maria	13,268	13,128	12,352	7,792
Golden State Water Company	194	183	203	233
City of Guadalupe	404	476	466	348
Vandenberg Air Force Base	3,436	3,369	3,701	1,899
City of Buellton	605	650	643	464
City of Solvang <sup>2</sup>	1,225	1,226	1,310	1,167
Santa Ynez River WCD ID#1 <sup>3</sup>	630	750	454	203
Santa Barbara Research Center	50	55	33	19
Morehart Land Company	84	0	60	0
La Cumbre Mutual Water Company	330	704	693	776
Goleta Water District	1,129	983	3,007	1,656
City of Santa Barbara	748	656	550	621
Montecito Water District	748	656	3,700	2,680
Carpinteria Valley Water District	493	439	568	533
<b>TOTALS</b>	<b>23,344</b>	<b>23,275</b>	<b>27,740</b>	<b>18,391</b>

Table 2: State Water Project Deliveries from 2005 through 2008

1 This table reflects actual deliveries which are less than Table A amounts in many cases.

2 The City of Solvang gets its State Water through a contractual arrangement with Santa Ynez River Water Conservation District ID #1 (SYRWCD ID#1); it does not hold a direct allocation to the State Water Project.

3 SYRWCD ID#1 actually receives more water than is listed, in exchange for Cachuma Project Water. The Goleta Water District, the City of Santa Barbara, Montecito Water District and Carpinteria Valley Water District get the Cachuma Project Water allotted to SYRWCD ID#1 as part of the "exchange program". **This table reflects actual amounts delivered to the system and then to individual agencies from the State Water Project.**



## Cloudseeding

Santa Barbara County Water Agency conducts a weather modification program better known as “cloudseeding” to augment rainfall and runoff in watersheds behind the major water reservoirs; Lake Cachuma and Gibraltar Dam on the Santa Ynez River and Twitchell Reservoir near Santa Maria. For the Twitchell Reservoir component of the program only the Huasna and Alamo watersheds are seeded, not the rain shadowed area of the Cuyama River drainage.

The operational program has been in existence since 1981 and follows research conducted between 1957 and 1974 that indicated significant increases in rainfall could be achieved by seeding convective bands embedded in winter storms that move through the area. Sponsors of the research programs included the National Science Foundation, Naval Weapons Center China Lake, U.S. Weather Bureau, U.S. Forest Service, State of California, University of California, Santa Barbara County and Ventura County. Research programs dating back to the 1950s were the result of pioneering work done in the field of weather modification in the late 1940s by Dr. Vincent Schaefer and Dr. Bernard Vonnegut.

The Water Agency splits the cost of the current operational program with local water purveyors under a matching funds program where the Water Agency matches funds provided by local water purveyors on a year by year basis. The design of the program changes year by year to reflect watershed and hydrologic conditions. For example, if wildfire affects a watershed that watershed may not be seeded until it has recovered, as in the recent Zaca Fire. If reservoirs are filled the program may be curtailed and funds carried over to the next season. Not all storms are seeded – weak storms many times do not have the super-cooled water vapor content or proper wind field to promote significant results from seeding and very strong storms may not be seeded due to potential flooding in urban areas and perception of use of the program. No urban areas are targeted, just backcountry areas behind major reservoirs.

Figure 4 on the following page depicts Santa Barbara County terrain as well as the Cloudseeding Target Areas and ground sites from which Cloudseeding operations are conducted.

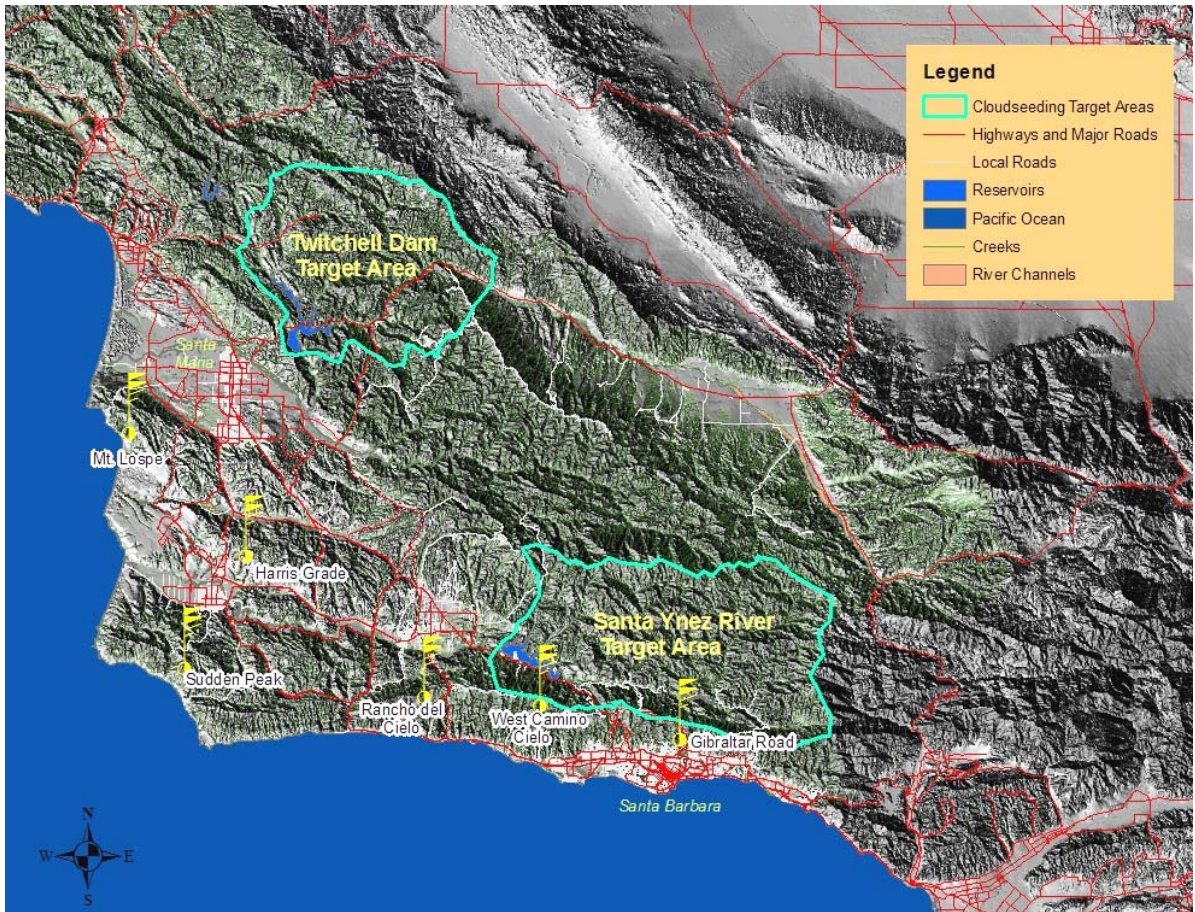


Figure 4: Santa Barbara County Cloudseeding Program Target Areas

Most storms that arrive in Santa Barbara County are abundant in moisture but limited in condensation nuclei. Water droplets or ice particles form on microscopic condensation nuclei, extremely small particles of dust or dirt in the atmosphere. Research has shown that many of these storms have embedded convective bands with super-cooled water vapor. Super-cooled water vapor is water vapor existing below the freezing point but does not freeze due to extremely low atmospheric pressure. By identifying these embedded convective bands and injecting artificial hygroscopic material into the cloud mass, cloudseeding provides a mechanism to move the moisture from the cloud mass to the surface of the earth where it is needed. Seeding is accomplished by both ground and aircraft. In some instances it is more cost effective to seed from the ground and in others with aircraft. Currently six land based sites are utilized, from north to south they are: Mt. Lospe, Harris Grade, Sudden Peak, Refugio Pass, West Camino Cielo and Gibraltar Road.

The cloudseeding program plays a valuable role in protecting groundwater resources by increasing rainfall in seeded storms by 18-22% (Solak, et al., 1996). Increased runoff captured by Gibraltar Dam and Lake Cachuma on the Santa Ynez River is used for a variety of purposes including municipal and industrial, direct irrigation of agriculture, recharge to the Santa Ynez River alluvial aquifer and Lompoc groundwater basin and supplement of freshwater habitat. Increased runoff captured by Twitchell Reservoir is released slowly in the late spring and summer months in order to percolate into the heavily utilized Santa Maria groundwater basin.

The California Department of Water Resources labels cloudseeding a “safe and effective means of augmenting local water supplies” and as such the County Water Agency sees cloudseeding as a very cost effective means of promoting adequate water supplies into the future.

## Groundwater Basin Management Plans

Several cities and water districts have prepared groundwater management plans in accordance with State Assembly Bill AB 3030. Enacted in 1992, the Bill allows local agencies, with public involvement, to prepare, adopt, and enforce groundwater management plans for the protection of groundwater. The table below lists agencies that have adopted plans, as well as those subject to court actions. To view the individual plans please contact the appropriate agency listed.

### GROUNDWATER MANAGEMENT PLAN STATUS

BASIN	PUBLIC AGENCY PARTICIPANTS <sup>1</sup>	STATUS
Carpinteria	Carpinteria Valley WD	Plan Adopted
Montecito	Montecito WD	Plan Adopted
Santa Barbara	City of Santa Barbara	Plan Adopted
Foothill	City of Santa Barbara	Plan Adopted
Goleta	Goleta WD	Court Action <sup>2</sup>
Buellton Uplands	Santa Ynez River WCD, City of Buellton	Plan Adopted
Santa Maria Valley	City of Santa Maria, Santa Maria Valley WCD, Cal Cities	Court Action (Pending)

Table 3: Groundwater Management Plans

<sup>1</sup>Other participants include private water companies and overlying property owners.

<sup>2</sup>The “Wright Suit” Settlement stipulates management actions in the North and Central Sub-basins.

# Climate and General Hydrologic Trends

## Terrain

Like most of Southern California, Santa Barbara County is very mountainous. The steep Santa Ynez Mountains bound the coastal communities of Goleta, Santa Barbara, Montecito and Carpinteria; farther north the Santa Rafael Mountains rise to the highest elevations in the County. The Sierra Madre Mountains occupy the northeast portion of the County. In summation, 65% of Santa Barbara County's 2745 square miles is hilly or mountainous. Most of the remaining 35% of the land consists of valleys and plains including the Cuyama Valley, Santa Maria Valley, Santa Ynez Valley, Lompoc Plain and Santa Barbara Coastal Plain. These are the areas that serve as groundwater basins or extraction areas. The five principal drainage areas of the County are the Cuyama Watershed at 1132 square miles, the Santa Maria Watershed at 713 square miles, the San Antonio Watershed at 165 square miles, the Santa Ynez River Watershed at 900 square miles and the South Coast Watersheds which cover 416 square miles.

## Overview

Santa Barbara County has a Mediterranean type climate encompassing several microclimatic regions. The County is unique in its physical orientation, having a series of east-west trending transverse mountain ranges which produce a profound orographic effect when a storm approaches the County from the Pacific Ocean.

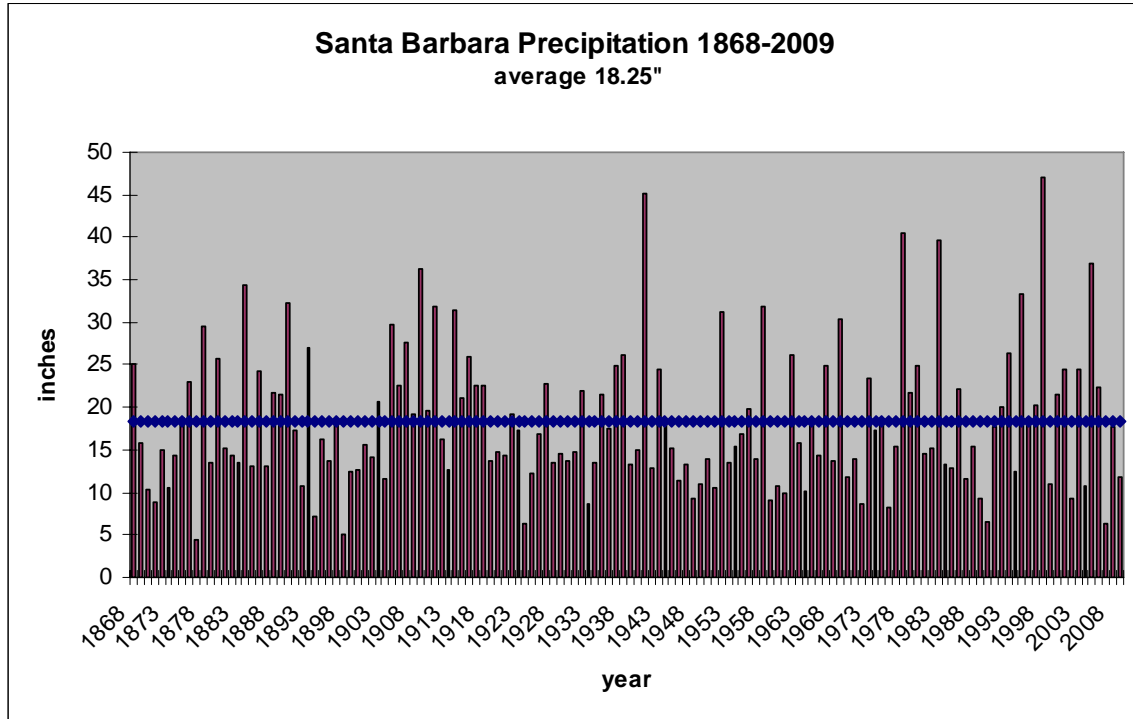


Figure 5: Santa Barbara Seasonal Precipitation from 1868 through 2009

Thus, rainfall amounts can be quite variable from location to location. Most precipitation occurs between November and March with the exception of some far inland mountain areas that receive sporadic thundershowers during the summer months. Moist air from the Pacific Ocean moderates temperatures in the coastal areas; somewhat lower winter minimums and higher summer maximums prevail in inland valleys behind the coastal hills and mountains. Average seasonal precipitation varies from seven to nine inches near Cuyama to a maximum of approximately 36 inches at the uppermost elevations of the San Rafael Mountains. Precipitation amounts vary greatly year to year; in Santa Barbara the lowest seasonal total is 4.49 inches recorded in 1877 and the highest seasonal total is 46.97 inches recorded in 1998. Figure 5 on the previous page depicts seasonal rainfall in the City of Santa Barbara from 1868 through 2009.

Santa Barbara County is subject to some of the highest short duration rainfall intensities in California. Intensities of 1.15 inches for a 15 minute period were recorded in 1993 at the Buellton Fire Station and 14.09 inches were recorded for a 24 hour period in 1969 at Juncal Dam nestled behind the Santa Ynez Mountains at an elevation of 2075 feet above sea level. Generally, the Santa Barbara County area receives only one or two storms per season that produce rainfall intensities of 3/4 of an inch per hour or greater.

Santa Barbara County's weather is controlled mainly by the Pacific High Pressure System. Uncommon warm type storms originating in the Southeast Pacific Ocean and more common winter cold type storms from the Gulf of Alaska comprise the scope of the County's precipitation. In the dry season between the months of May through September the Pacific High Pressure usually occupies the area northeast of Hawaii keeping the storm track far away from the local area. During the winter months it is weaker and positioned further south allowing storm systems that form off the coast of Asia to move toward the Aleutian low pressure zone. There, these storms frequently gain strength and continue their movement southeast along the West Coast of the United States. During this southward movement the storms usually weaken and in most cases Santa Barbara County receives relatively gentle but steady rain for several days as an occluded cold front trails past the area. Occasionally a cold storm maintains its strength until it reaches Southern California, at which time the County may experience precipitation of high intensity. At times the persistence of the Pacific High at latitude farther north during the winter months keeps the Pacific storm track farther to the north. This "blocking high" results in either no precipitation for California or at most only light amounts. This climatological scenario is the reason for most of California's dryer than normal winters including the 1976-1977 and 1989-1990 seasons.

### ***Precipitation and Recharge Patterns during the 2006-2008 Period***

Rainfall during the 2006-2008 period was 84% of average countywide and as such produced only very small amounts of recharge to groundwater basins and inflow to reservoirs. The 2005-2006 Winter produced 115% of normal rainfall, the very dry 2006-2007 Winter produced only 36% of normal and the 2007-2008 Winter produced 102% of normal precipitation. It is important to note that average rainfall does not typically produce significant recharge. The last significant recharge year was 2005 which produced 188% of normal rainfall.

Most of the 2006 rainfall occurred in late spring storms that occurred in early April. Because the watersheds had somewhat dried out during March and ample spring

vegetation intercepted much of the water there was only minor runoff and recharge even though the year ended with 115% of normal precipitation.

2007 was an extremely dry year that resulted in only 36% of normal precipitation. If not for some late February storms 2007 may have ended up as the driest year on record for many locations around the County. The massive Zaca Fire in the Los Padres National Forest followed this extremely dry year during the summer of 2007.

2008 produced 102% of normal precipitation due mostly to a strong late January storm that brought significant runoff into Lake Cachuma. This storm and another extremely cold storm in February were out of the Pacific Northwest and produced significant snowfall and snowfall at unusually low elevations. It is important to note that although average rainfall does not usually produce runoff, the Zaca Fire resulted in significant runoff on both the Santa Ynez and Sisquoc River systems. See “Effects of Wildland Fire on Runoff and Recharge Patterns on page 22.

Figure 6 below depicts rainfall for selected locations throughout the County during the 2006-2009 period compared to average seasonal rainfall.

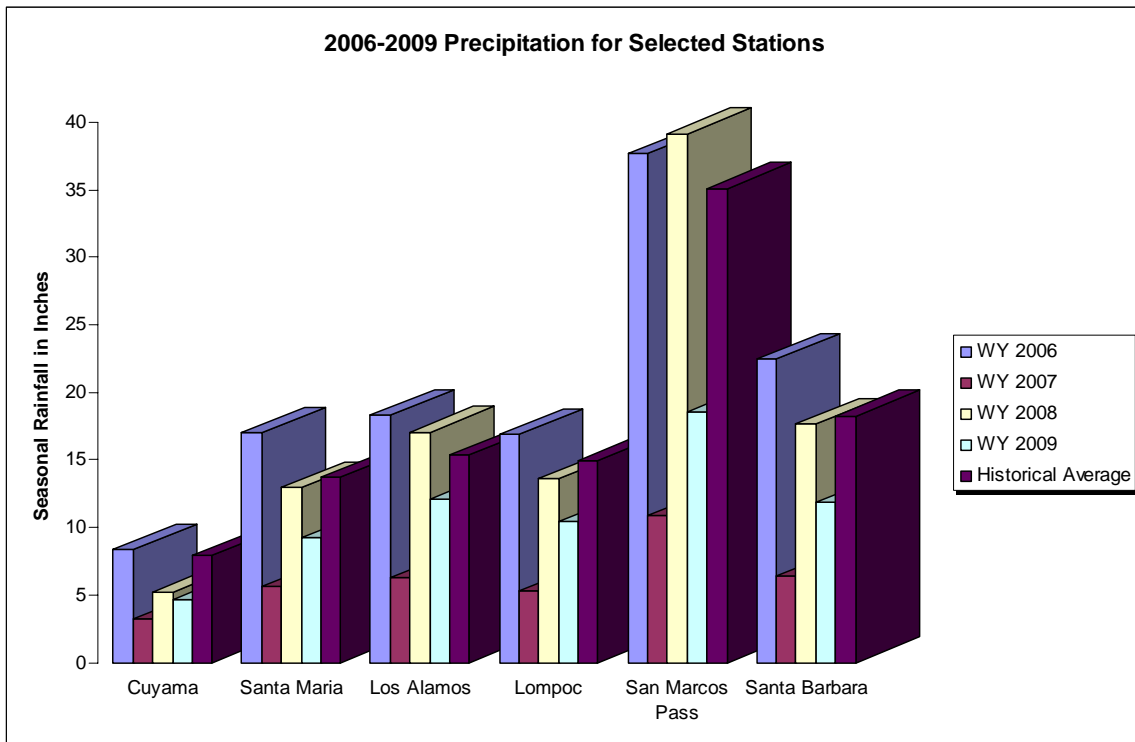


Figure 6: 2006-2009 Precipitation for Selected Stations

### ***Effects of Recent Climate on Santa Barbara County Groundwater Basins***

Many of the monitoring wells discussed in this report exhibit pronounced water level fluctuations as a result of the varying weather patterns of the area's semi-arid climate. Note that in most years the area receives below average rainfall.



Well response to precipitation depends on many factors including the percolation time required for recharge to reach water tables. Deep aquifers respond slowly, often having a lag time of two or more years (see the hydrograph for State Well 7N/30W-33M2 in the Santa Ynez Uplands Groundwater Basin section on page 53). Shallow aquifers such as those near creeks and rivers and those located in relatively shallow basins with surface material of high porosity tend to respond more quickly to variations in precipitation and stream flow. Therefore, in such areas there has been a strong correlation between well measurements for a particular year and that season's precipitation (see the hydrograph for State Well 4N/26W-8P3 in the Montecito Groundwater Basin section on page 36).

The drought of 1987 to 1991 led to significant declines in water levels (see the hydrograph for State Well 10N/34W-14E5 in the Santa Maria Groundwater Basin section on page 77). Following 1991 seven out of nine years produced above average rainfall, and as a result of this wet period groundwater levels in 1999-2002 throughout Santa Barbara County were generally the highest since the mid 1940s, and in some areas highest since the 1920s. The historic winter of 1998, which produced some of the largest rainfall amounts of record, caused shallow wells to rise sharply during that year, and deeper wells to rise for up to 4 years afterwards. 2001 produced copious rainfall amounts throughout Santa Barbara County and Lake Cachuma filled and spilled. Rainfall during 1999 and 2000 was near average and did not produce significant runoff or recharge to groundwater basins. 2003 rainfall was above average but was spread throughout the season, thus most of the rain was lost to evapotranspiration. Rainfall during 2002 and 2004 was near only 50% of average. 2005 rainfall was 188% of normal and thus was the most recent season to produce substantial runoff to reservoirs and recharge to groundwater basins. Alluvial and shallow wells received an immediate response which showed up in the 2005 groundwater measurements, while the deeper wells exhibited rise from this recharge through 2008.

Figure 7 on the following page describes the long-term fluctuation of the local area. It is a cumulative deviation or 'departure' from mean chart which illustrates multi-year trends in the area. When rising the graph line represents a wet trend and when falling it represents a dry trend. The figure exhibits long-term trends that affect groundwater levels and storage within the County. The late part of the 19<sup>th</sup> century shows a dry trend lasting through 1904, after which there was an extremely wet trend lasting through 1918. The recent wet trend of 1991 to 2005 is one of the wettest periods on record, second only to that of 1905-1918. The critical long-term dry period as shown on the graph is 1946-1977, although that varies somewhat at different rainfall gauging stations throughout the County. The graph shows that we may currently be entering another dryer than normal period as the trend is downward.

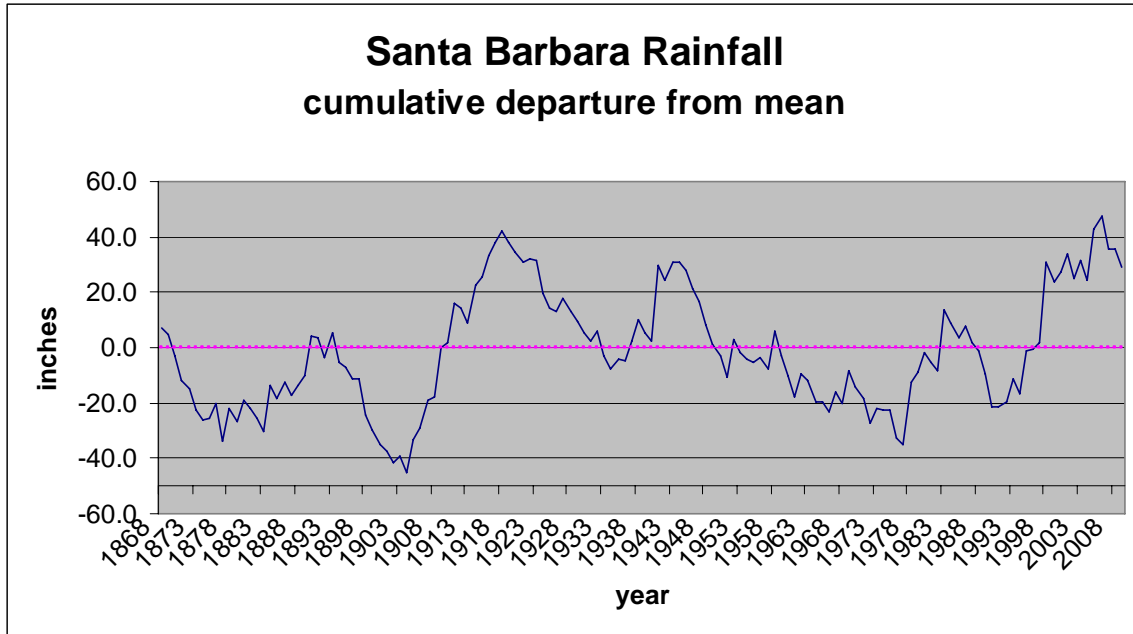


Figure 7: Rainfall Cumulative Departure from Mean for Santa Barbara

It is important to note that localized influences such as variations in pumping can obscure general groundwater level trends. Thus every effort is made to use well data collected during periods of no local pumping. Factors affecting trends displayed by well hydrographs include length of record, proximity to sources of recharge and active wells, and short-term climatic variations. As a result of these factors, in the Santa Barbara County region single year or short term groundwater trends are of limited value in assessing overall basin conditions due to annual rainfall fluctuations.

Another effective way to examine the hydrologic condition of the area is to look at a time series chart of the storage in Lake Cachuma. When lake storage is high it generally corresponds to a recent or current wet period and when lake storage is low it generally corresponds to the opposite. Examination of Figure 8 on the following page reveals that following the drought of 1987-1991 the Lake was extremely low, then high in the mid to late 1990s due to above average rainfall during the period 1992-1998. The lake then dropped through the period late 2001 through 2004 due to below average or near average rainfall but then recovered during the extreme rain events of the 2004-2005 winter season. In 1995 the Lake was kept at a lower than normal operating level due to seismic strengthening work that was being done on the Dam. The “spikes” from 1995 were caused by exceptionally large January 10 and March 10 storms that delivered a large amount of water to the facility. The Lake was immediately and intentionally lowered right after the storms to continue with the seismic strengthening work. The “spike” in 1998 was from the February 23<sup>rd</sup> storm during which the Lake was intentionally surcharged to hold back floodwaters and protect downstream interests. The blue line represents the “full” lake at elevation 750 feet msl (mean sea level). When water is stored above that elevation the lake is “surcharged”.



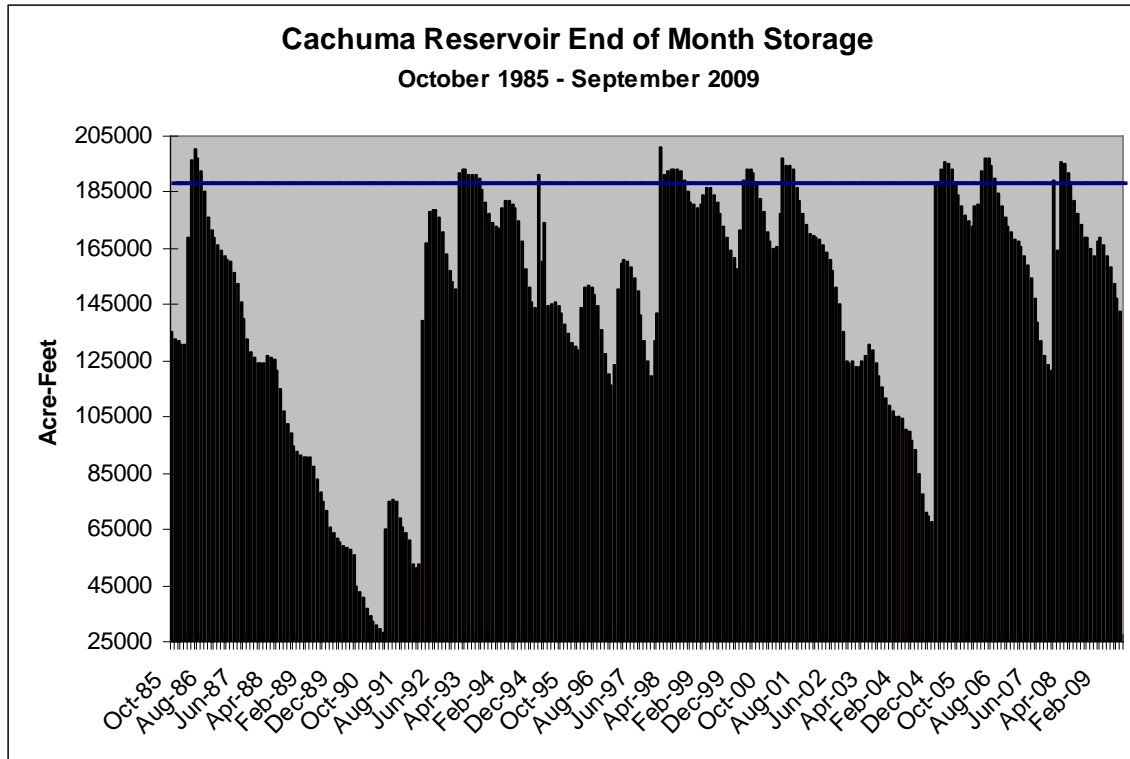


Figure 8: Cachuma Reservoir Storage from 1985 to 2009

### ***Effects of Wildland Fire on Runoff and Recharge Patterns***

The recent Zaca, Gap, Tea, Jesusita and La Brea Fires denuded the hillsides of vegetation and in many areas made the soil hydrophobic or water repellent. The thick chaparral vegetation usually intercepts much of the rainfall before it gets to the ground. Thus, runoff from the burn areas, where vegetation is denuded, is greatly accelerated. In areas like the South Coast this can be extremely problematic for the Flood Control District, Cities and property owners who need to avoid excessive and accelerated runoff. However, in the larger watersheds of the Santa Ynez and Sisquoc Rivers the accelerated runoff may help to fill reservoirs and groundwater basins with less rainfall than would have occurred under unburned conditions. Note that in 2008 Lake Cachuma filled with only average precipitation due to the increased runoff from the Zaca Fire (See Figure 8 above, Cachuma Reservoir Storage from 1985 to 2009).

### ***Climatic Indicators***

The yield of water supply facilities and groundwater basins is commonly determined by modeling based on previous recorded hydrologic data. Thus, an assumption that future climate will be similar to recorded climate since the mid 1800's may be errant. Many climatic indicators are commonly used in attempting to make seasonal or multi seasonal forecasts of water availability. El Nino, the Pacific Decadal Oscillation and Dendrochronology, otherwise known as tree ring analysis are the most common.

## El Nino

El Nino is the most well known and publicized climatic indicator. El Nino is an oscillation of the ocean-atmosphere system in the tropical Pacific having important consequences for weather around the globe. El Nino is defined by sustained differences in Pacific-Ocean surface temperatures when compared with the average value. The accepted definition is a warming (El Nino) or cooling (La Nina) of at least 0.5°C (0.9°F) averaged over the east-central tropical Pacific Ocean. When this happens for less than five months, it is classified as El Nino or La Niña conditions; if the anomaly persists for five months or longer, it is called an El Nino or La Niña "episode." Typically, this happens at irregular intervals of two to seven years and lasts nine months to two years. The first signs of an El Nino are:

- Surface pressure rises over the Indian Ocean, Indonesia, and Australia
- Air pressure drops over Tahiti and the rest of the central and eastern Pacific Ocean
- Trade winds in the south Pacific weaken or head east
- Warm air rises near Peru, causing rain in the northern Peruvian deserts
- Warm water spreads from the west Pacific and the Indian Ocean to the east Pacific. It takes the rain with it, causing extensive drought in the western Pacific and rainfall in the normally dry eastern Pacific.

El Nino's warm current of nutrient-poor tropical water, heated by its eastward passage in the Equatorial Current, replaces the cold, nutrient-rich surface water of the Humboldt Current. When El Nino conditions last for many months, extensive ocean warming occurs and its economic impact to local fishing for an international market can be serious. For Santa Barbara County, the main impact of El Nino is increased seasonal rainfall. Recent El Nino years include the wet seasons of 1982-1983, 1985-1986, 1991-1992 and 1997-1998.

## Pacific Decadal Oscillation

The Pacific Decadal Oscillation (PDO) is a long-term ocean fluctuation of the Pacific Ocean. The PDO waxes and wanes approximately every 20 to 30 years. The PDO (like El Nino) is characterized by changes in sea surface temperature, sea level pressure, and wind patterns. The PDO is described as being in one of two phases: a warm phase and a cool phase. During the 20th century, each PDO phase typically lasted for 20-30 years. Studies indicate that the PDO was in a cool phase from approximately 1890 to 1925 and 1945 to 1977. Warm phase PDO regimes existed from 1925-1946 and from 1977 to (at least) 1998. Pacific climate changes in the late 1990s have, in many respects, suggested another reversal in the PDO from warm to cool. However, a lack of PDO understanding makes it impossible to determine true PDO reversals soon after they occur. Note that there appears to be strong correlation of Santa Barbara County rainfall with the PDO. From the Cumulative Departure from Mean chart on page 21 one can deduce that while the PDO is in a cool phase our seasonal rainfall volume is declining and while the PDO is in a warm phase our seasonal rainfall volume is increasing. If the PDO has again entered a cool phase less than average yearly rainfall for the next 15-20 years may result. For more information on the PDO go to the University of Washington website <http://cses.washington.edu/cig/pnwc/aboutpdo.shtml>.

## Dendrochronology

Dendrochronology or tree ring analysis is the dating of past climatic changes through the study of tree ring growth. Botanists, foresters and archaeologists began using this technique during the early part of the 20th century. Dendrochronology was discovered by A.E. Douglass, who noted that the wide rings of certain species of trees were produced during wet years and, inversely, narrow rings during dry seasons. Each year a tree adds a layer of wood to its trunk and branches thus creating the annual rings we see when viewing a cross section. New wood grows from the cambium layer between the old wood and the bark. In the spring, when moisture is plentiful, the tree devotes its energy to producing new growth cells. These first new cells are large, but as the summer progresses their size decreases until, in the fall, growth stops and cells die, with no new growth appearing until the next spring. The contrast between these smaller old cells and next year's larger new cells is enough to establish a ring, thus making counting possible. Thus, rainfall patterns can be deduced from examining tree rings. In the Southwestern United States, tree rings provide a time series that is similar to rainfall and runoff. Tree ring analysis and reconstruction of climate has been done for the Santa Ynez River Watershed (Michaelsen and Haston, 1988) and indicates that since 1537 there have been major fluctuations in precipitation variability including changes in the frequency of extremes and rare events that have not occurred in modern records. One such rare event was an extremely dry period from 1621 to 1637 in which there was a 33% decline in water supply. As previously mentioned in this report the critical parameter in evaluation of a groundwater basin is the base period used to project climate and recharge to the basin, thus analyses can be faulty when selecting an unusually wet or dry period.

## **Geologic Setting**

Santa Barbara County is situated entirely on the Pacific Plate, the tectonic plate beneath the Pacific Ocean. The local geography was originally formed as a product of subduction of the Pacific Plate beneath the western boundary of North America. The formation of the Santa Ynez, San Rafael, and Sierra Madre Mountains including the Channel Islands are a result of these plate interactions. Santa Barbara County is relatively young geologically-speaking. The oldest rocks, found on Santa Cruz Island, date back to 150 million years ago (mya). About 15 mya the plate motion became more oblique and subduction transitioned to transform faulting. Today the plate boundary is defined by the San Andreas Fault located to the northeast of the County and movement of this portion of the Pacific Plate is one to two inches per year to the northwest.

The majority of the Santa Barbara County mainland consists of marine sedimentary rock; originally loose sand, soft mud or gravel deposited on the sea floor. These sediments were laid down in the late Cretaceous to early Tertiary Period (150-65 mya). Over the last 10 million years, these beds have been compressed, raised, and folded into their current configuration above sea level. Marine terraces created by wave erosion were also elevated and exposed on the mainland. The landscape in Santa Barbara County continues to evolve as the process of tectonic uplift outpaces erosion as evidenced by our coastal cliffs and narrow beaches.

The groundwater resources of Santa Barbara County are a direct result of these geologic processes. Water bearing formations typically consist of unconsolidated clay, silt, sand and gravel either marine or fluvial in origin ranging in age from the Pliocene Epoch (5.0–1.8 mya), the Pleistocene Epoch (1.8-.01 mya), to the Holocene Epoch (< .01 mya).

Along the South Coast, primary water bearing rocks consist of Holocene and Pleistocene alluvium, underlain by Pleistocene terrestrial deposits (Carpinteria Formation, Casitas Formation), and the late Pliocene, early Pleistocene Santa Barbara Formation, which is composed of massive unconsolidated marine deposits.

North of the Santa Ynez Mountains, groundwater is found in Holocene alluvium and dune sand, Pleistocene terrace deposits (Orcutt Formation, Paso Robles Formation), and Pliocene formations of loosely consolidated marine sand and silt (Careaga Sand). In the Cuyama Valley groundwater is found in Holocene alluvium, underlain by Pleistocene terrace deposits, and the Pliocene Cuyama or Morales Formation consisting of terrestrial deposits of poorly consolidated clay, silt, and gravel.

### **Major Water Bearing Geologic Formations of Santa Barbara County**

This section provides a summary of the major water bearing formations of Santa Barbara County that are discussed in this report (in order of their geologic age from oldest to youngest). All of the formations listed are from the Pliocene, Pleistocene, or Recent Geologic Epochs. These correspond to 5 million, 1.8 million, and 10,000 years before present, respectively.

### ***Careaga Sand***

The Careaga Sand of late Pliocene age is a predominately marine formation that is part of the Santa Maria, San Antonio, Santa Ynez Uplands and Lompoc Groundwater Basins. It consists of two distinct members, the upper or Graciosa member and the lower or Cebada member (Woodring and Bramlette, 1950). It is a loosely consolidated sand containing some silt and abundant well rounded pebbles in the upper part. It is typically grey white to yellow in appearance and can yield moderate amounts of water to wells. Reports of wells yielding several hundred gallons per minute from this Formation are not uncommon. The Careaga Sand contains much silt and fine sand and has a reputation of sanding up water wells tapping it, thus care must be taken in construction of wells that are to tap this formation.

### ***Paso Robles Formation***

The Paso Robles Formation of Pliocene to Pleistocene age is a continental formation that is part of the Santa Maria, San Antonio, Santa Ynez Uplands and Lompoc Groundwater Basins. It is the most widespread producer of water of all the groundwater basins in Santa Barbara County. It consists of poorly consolidated stream deposited lenticular beds of gravel, sand, silt and clay. Generally the sand is crossbedded and poorly sorted and silty and includes stringers of coarse sand and pebbles. The lower part of the Formation contains occasional beds of fresh water limestone ranging in thickness from one to 30 feet. Yields from the Paso Robles Formation are typically between 500 to 1,200 gallons per minute.

### ***Morales Formation***

The Morales Formation of Pliocene to Pleistocene age is a continental formation that is part of the Cuyama Groundwater Basin. It consists predominantly of large and extensive bodies of poorly consolidated clay, silt, sand and gravel. This formation has not been studied extensively and thus not much is known about the hydraulic properties of the aquifer. It is known that wells tapping this formation can yield in excess of 1,000 gallons per minute. The Santa Barbara County Water Agency is currently conducting a study of the Cuyama Groundwater Basin in cooperation with the United States Geological Survey and as part of the study properties of the Morales Formation will be explored.

### ***Santa Barbara Formation***

The Santa Barbara Formation is a marine formation of Pleistocene age that is part of all the South Coast Groundwater Basins: Goleta, Santa Barbara, Montecito and Carpinteria. It is comprised of sand, silt and clay and is up to 2000 feet thick in some areas. It is more prevalent in the Goleta and Santa Barbara Groundwater Basins than the Montecito and Carpinteria Groundwater Basins. Typical yields of the Santa Barbara Formation are between 250 gallons per minute (Carpinteria Groundwater Basin) to over 1,000 gallons per minute (Goleta Groundwater Basin).

### ***Casitas Formation***

The Casitas Formation of Pleistocene age is a continental formation that serves as the principal aquifer for the Carpinteria and Montecito Groundwater Basins. It is comprised of unconsolidated clay, silt, sand and also gravel in areas close to the base of the Santa

Ynez Mountains. Its appearance is red to buff in color. It lies unconformably upon most if not all of the Santa Barbara Formation. Typical yields from the Casitas Formation are 500 to 1,000 gallons per minute.

### ***Orcutt Formation***

The Orcutt Formation of middle to late Pleistocene age is a continental formation that rests unconformably primarily on the Paso Robles Formation and is part of the Santa Maria, San Antonio and Lompoc Groundwater Basins. It is generally only 50 to 200 feet in thickness. This formation is composed of two members, an upper fine grained member and a lower coarse grained member. The upper member is mostly a loosely compacted massive medium grained clean sand, stained reddish brown by a ferruginous cement and interstratified with lenses of clay. The lower member is a loosely compacted coarse grey to white gravel and sand. In many areas the Orcutt Formation is above the water table, but in areas where it is not it can yield water in appreciable quantities.

### ***Older Alluvium***

The Older Alluvium of late Pleistocene age consists unconsolidated clay, silt, sand and gravel and is partly continental and partly marine in origin, dependant upon location. The deposits rest unconformably on the Casitas Formation, the Santa Barbara Formation, the Paso Robles Formation and the Morales Formation in Santa Barbara County. The Older Alluvium is typically up to 250 feet in thickness and can yield moderate amounts of water to wells.

### ***Terrace Deposits***

Terrace deposits of the late Pleistocene age reside in most groundwater basins in Santa Barbara County as they are created by lateral erosion of streams and wave erosion during high stands of the sea. They consist of unconsolidated clay, silt, sand and gravel and are partly alluvial and partly marine in origin. At most places the deposits are above the water table and too thin or inextensive to contain groundwater, although a few domestic wells do tap the Terrace Deposits.

### ***Younger Alluvium***

The Younger Alluvium of recent geologic age is a continental formation that has formed due to fluvial events of the recent past and is found in all groundwater basins of Santa Barbara County. It consists of unconsolidated clay, silt and sand, with minor amounts of gravel. It is typically 10 to 100 feet thick, dependant upon location. Generally this formation yields water only moderately readily and cannot support sustained pumping from wells. In many areas it is above the water table.



## Santa Barbara County Groundwater Basins

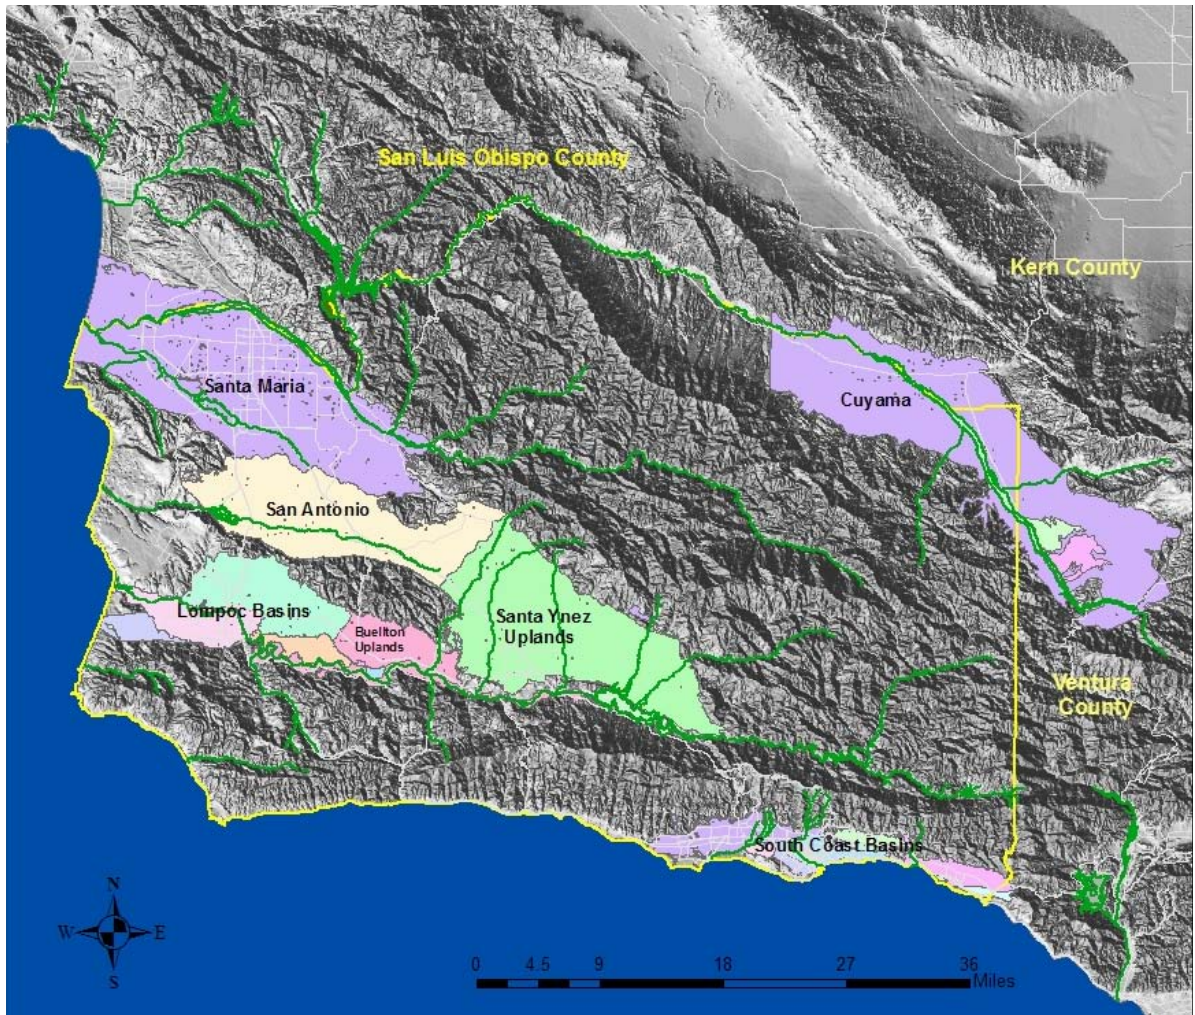


Figure 9: Santa Barbara County Groundwater Basins

### 1. South Coast Groundwater Basins:

- Carpinteria
- Montecito
- Santa Barbara
- Foothill
- Goleta

### 2. The Santa Ynez River Watershed

- Santa Ynez Uplands
- Buellton Uplands
- Santa Ynez River Riparian
- Lompoc Groundwater Basins

### 3. The North Coastal Groundwater Basins

- San Antonio
- Santa Maria

### 4. The Cuyama Groundwater Basin

## South Coast Groundwater Basins

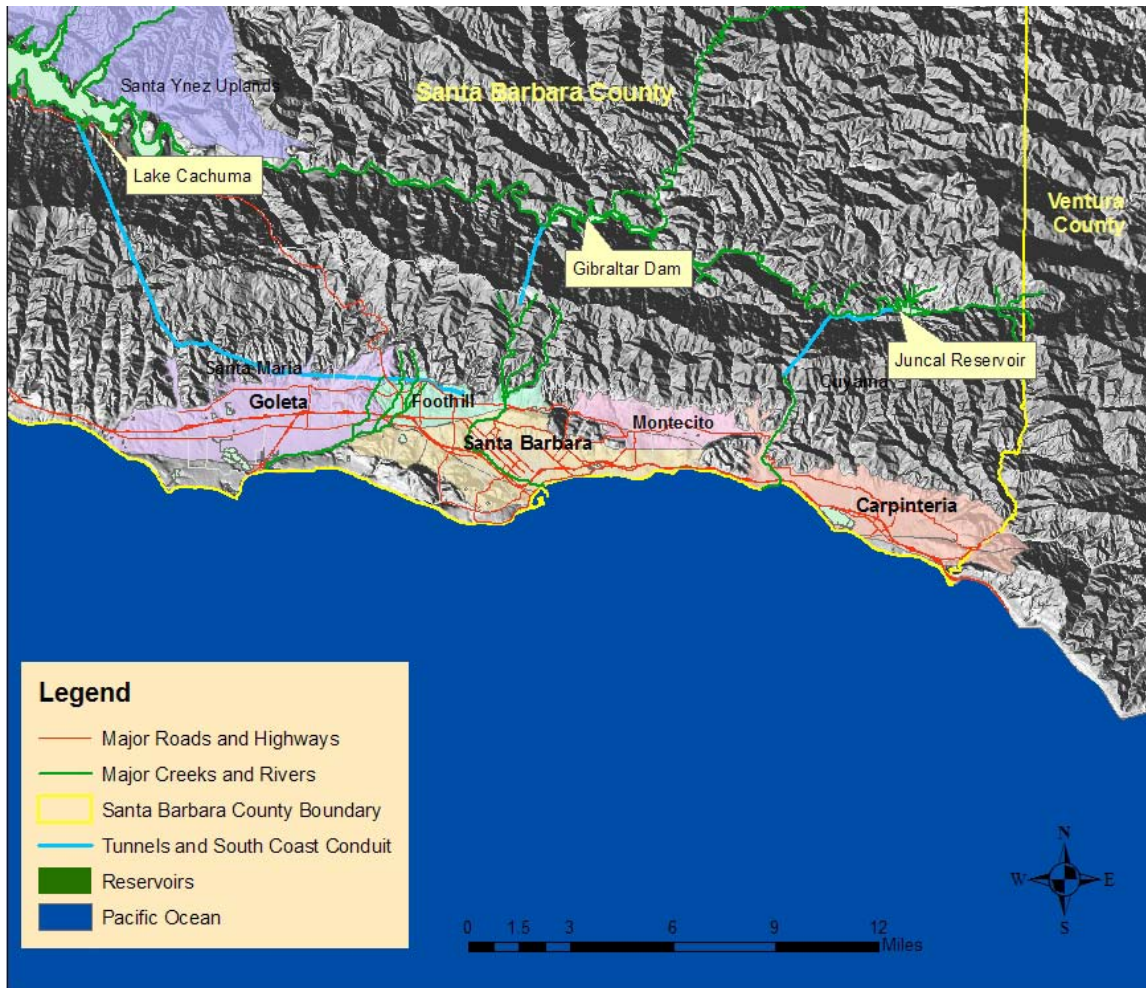


Figure 10: South Coast Groundwater Basins

The South Coast basins are located between the Santa Ynez Mountains and the Pacific Ocean. In general, these basins are composed of the unconsolidated material that accumulated as a result of the uplift and erosion of the ancestral Santa Ynez Mountains. Several of the basins are generally differentiated from each other where faulting or impermeable geologic formations limit the hydrologic connection between the aquifers. Faults, impermeable bedrock, inferred lithologic barriers, or arbitrary (administrative) boundaries separate the major groundwater basins (Carpinteria, Montecito, Santa Barbara, Foothill and Goleta) from each other. Inferred barriers exist where pronounced changes in water depth and/or water quality exist but where there is no other direct physical evidence of faulting or other physical barriers. It is important to note that basin and sub-basin boundaries might change as more is learned about the geologic and hydrologic relationships between the aquifer units.



# Carpinteria Groundwater Basin

## *Physical Description*

The Carpinteria Groundwater Basin underlies approximately 12 square miles in the Carpinteria Valley and extends east of the Santa Barbara County line into Ventura County. The basin contains two groundwater storage units (Geotechnical Consultants, Inc., 1976). Storage Unit No. 1 is located north of the Rincon Creek thrust fault and Storage Unit No. 2 is located south of the Rincon Creek thrust fault. The fault acts as a barrier to groundwater flow between the two storage units. Both groundwater storage units contain a component of groundwater in storage offshore. Based on historic records of groundwater pumped from each storage unit over the last 50 years, the useable volume of groundwater in Storage Unit No. 1 is on the order of 15,000 acre feet (AF). The useable volume of groundwater in Storage Unit No. 2 is much smaller, likely on the order of 1000 AF.

The Toro Canyon Sub-basin forms the most westerly part of the greater Carpinteria groundwater basin, and is included in the Montecito Water District (MWD) service area instead of the Carpinteria Valley Water District (CVWD) service area. The Toro Canyon area occupies a small extension of Storage Unit No. 1.

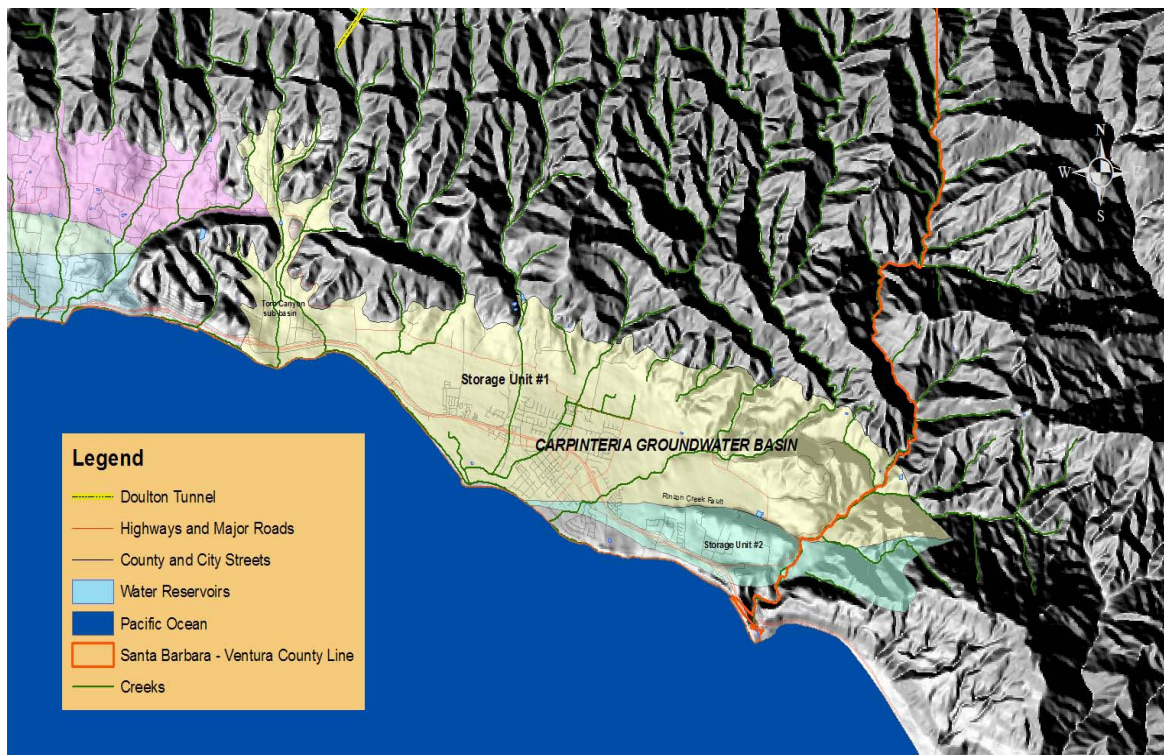


Figure 11: Carpinteria Groundwater Basin

The primary water-bearing deposits or aquifers in the Carpinteria basin are contained in the Casitas Formation, which is composed of lenticular deposits of poorly sorted clay, silt, sand and gravel, interspersed by cobbles and boulders (Upson and Thomasson, 1951). Storage Unit No. 1 for the most part consists of the Casitas Formation. Wells

which produce groundwater from the Casitas Formation often display yields in the range of 500 to 1000 gallons per minute (gpm). Aquifers in Storage Unit No. 2 consist of marine sand layers of the Santa Barbara Formation. Wells in this aquifer have yields in the range of 250 gpm. In addition, alluvial deposits locally overly the Casitas Formation, and provide a shallow water body that can yield moderate amounts of water.

Precipitation in the basin varies with elevation and averages about 16.6 inches per year near the coast but increases to about 24 inches per year on the south flank of the Santa Ynez Mountains. The primary drainages through which surface water empties into the Pacific Ocean are Rincon Creek, Carpinteria Creek, Franklin Creek, Santa Monica Creek, and Toro Canyon Creek (Fugro, 2009).

### ***History and Analyses***

The history of groundwater development and use in the Carpinteria groundwater basin is best described by Upson and Thomasson (1951), Geotechnical Consultants Inc. (1974) and Santa Barbara County Water Agency (1977). Current conditions of groundwater use including water level data, groundwater production, and groundwater quality are contained in annual reports the CVWD prepares in accordance with its adopted Assembly Bill (AB) 3030 Groundwater Management Plan. The most recent annual report was prepared by Fugro (2009) which documents groundwater conditions and use for the calendar year 2008.

The total volume of groundwater in the Carpinteria basin is estimated to be 700,000 Acre-Feet (AF) and of this total, approximately 575,000 AF is contained in Storage Unit No. 1, and about 75,000 AF contained in Storage Unit No. 2. Some small component of groundwater is also contained in storage offshore. Useable groundwater in storage is much less than the total volume of groundwater in storage. Based on a water balance mathematical model of the basin contained in Geotechnical Consultants, Inc. useable groundwater in storage in Storage Unit No. 1 is on the order of 15,000 AF and perhaps on the order of 1,000 AF for Storage Unit No. 2. The estimates are based on the observable range of water level variations and groundwater pumped annually from each storage unit over the 1933 to 1973 base period.

The Safe Yield of the basin (for gross pumpage) is estimated to be 5,000 AFY. Most recent pumpage information contained in Fugro (2009) indicate that from about 1998 groundwater pumpage from the basin has been on the order of 3,750 Acre-Feet per year (AFY). Of this amount, CVWD pumpage has been on the order of about 1,320 AFY. The balance of groundwater pumpage has been by private landowners for agricultural purposes. During this period, water levels in the basin have varied according to seasonal variations in precipitation and recharge, and the amounts of groundwater pumped. Groundwater levels in the basin based on springtime measurements in qualified wells are above sea level. There has been no documented evidence of seawater intrusion in the basin.

The California Department of Water Resources analyzed the basin in 1999 and calculated a surplus of 126 AFY based on a base period of 1988-1996 using a "specific yield" method. In 1992, the SBCWA calculated a surplus in the groundwater basin of 56 AFY. Based on current data (Fugro, 2009), and the District's ability to conjunctively use imported surface water from the Central Coast Water Authority (i.e., State Water

Project), and local surface water from Lake Cachuma, annual groundwater demand is, on average, about 1,250 AFY less than the established Safe Yield of 5,000 AFY.

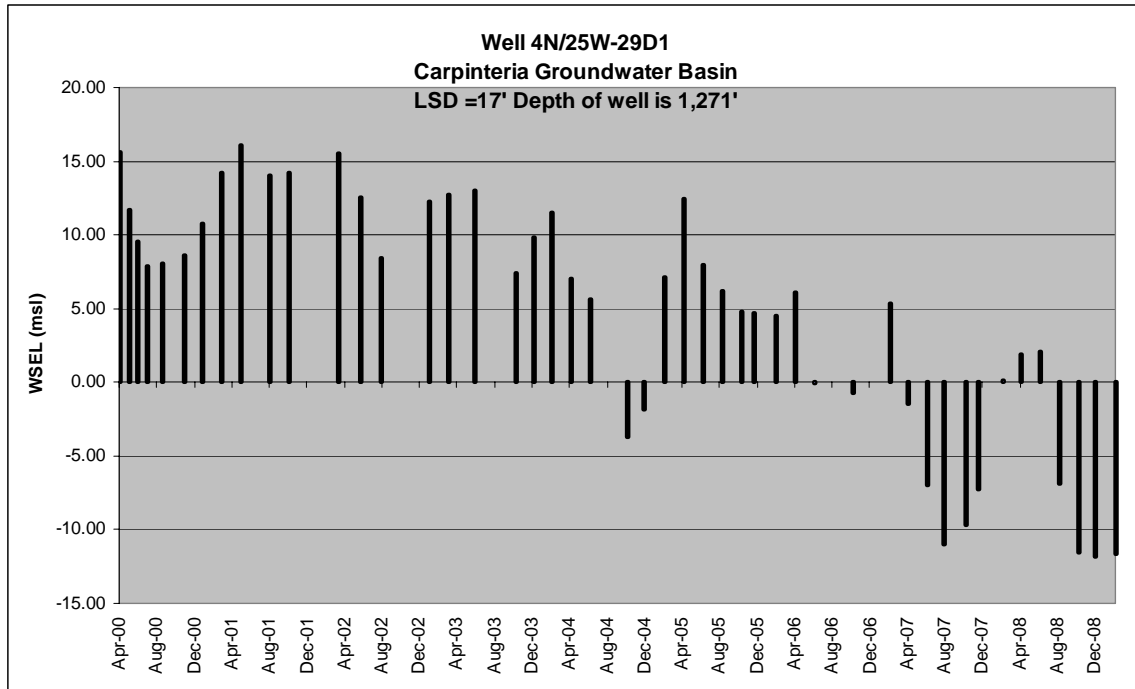


Figure 12: Hydrograph of State Well 4N/25W-29D1

As mentioned, two other sources of water are available within the basin: the Cachuma Project and the State Water Project. The Carpinteria Valley Water District (CVWD) receives approximately 2,800 AFY from Lake Cachuma and holds a maximum entitlement of 2,000 AFY in the State Water Project. In 2008 CVWD received 533 AF of State Water (see State Water Project section, page 8). Total water supply available to the Carpinteria Basin area (inside Santa Barbara County and excluding Toro Canyon) is approximately 8,800 AFY. Since 1988 CVWD has pumped an average of 1,320 AFY and it is estimated from land use surveys that private pumping within the basin has averaged 2,440 AFY resulting in a total average pumpage of 3,800 AFY. The average annual demand in the entire basin is about 7,400 AFY based on a County study (Baca, 1991) which accounted for all current and estimated future water demands in the basin. Based on calendar year 2008 data (Fugro, 2009), total basin demand was estimated at 6356 AF. Of this amount, 2,842 AF was CVWD purchased water, 1,074 AF of CVWD pumped groundwater, and 2,440 AF of privately pumped groundwater.

In summary, the Cachuma supply to the Carpinteria Groundwater Basin is 2,800 AFY and groundwater Safe Yield is 5,000 AFY, equaling 7,800 AFY. With an inferred annual water demand of 7,400, this leaves a surplus of 400 AFY, a number easily supplied by State Project Water even in dry years.

As mentioned, agricultural demand is met primarily by groundwater. Agriculture consists mostly of avocados, citrus and floriculture. Urban demand is met primarily by State Water and the Cachuma project.

## Water Quality

Water quality is monitored routinely in as many as a dozen wells in the basin as part of the District's AB 3030 program (Fugro, 2009). Since the initial USGS study on the basin (Upson and Worts 1951), TDS concentrations within the basin have remained stable, typically being on the order of 800 milligrams per liter (mg/l). This value can vary widely depending on location, well depth, and time of year sampled. Recent groundwater analyses conducted in 2008 indicate nitrate levels in groundwater in the basin are below the State maximum contaminant level of 45 mg/l for public water systems. There is no evidence of seawater intrusion into the basin. It is believed that the Rincon Creek and Carpinteria faults act as barriers to seawater intrusion, as do clay layers (aquifers) overlying the basin near the Carpinteria Slough.

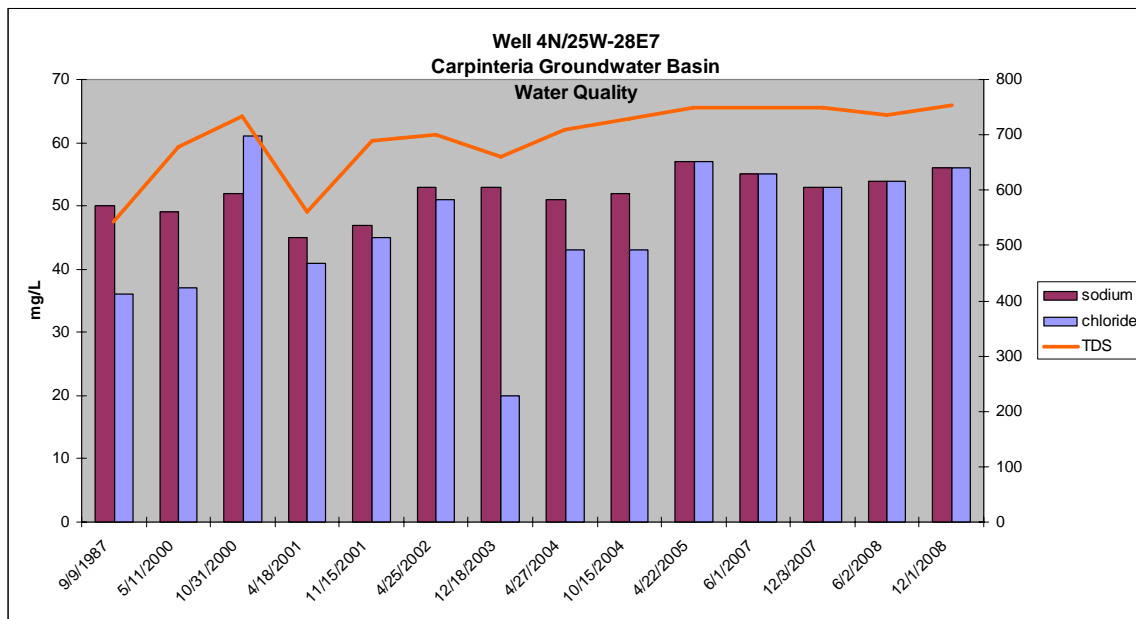


Figure 13: Water Quality Graph for State Well 4N/25W-28E7

### 2006-2008 Trends

Similar to other South Coastal areas of Santa Barbara County rainfall during the period was below average with an average for the three year period of 14.40 inches versus a long term average of 19.96 inches. This was mainly due to the extremely dry 2007 water year which recorded only 7.11 inches of rainfall. April 2006 was wet as was January 2007 but did not produce enough precipitation to create significant recharge to the Basin. Thus, there has been a predictable lowering of water levels in some wells in the last 5 years (Fugro, 2009). Figure 12 on the previous page is a typical water well hydrograph from the Carpinteria Groundwater Basin that shows these trends.



## Montecito Groundwater Basin

### Physical Description

The Montecito Groundwater Basin encompasses about 6.7 square miles between the Santa Ynez Mountains and the Pacific Ocean. It is separated from the Carpinteria Groundwater Basin to the east by faults and bedrock and from the Santa Barbara Groundwater Basin to the west by a topographical divide and to the south by the Montecito Fault. The basin had been divided into three storage units on the basis of east-west trending faults that act as barriers to groundwater movement. The northern unit is bounded on the south by the Arroyo Parida Fault, the central unit by the Montecito Fault and the southern unit by the Rincon Creek Fault. These storage units are numbered one, two, and three, respectively (Geotechnical Consultants, 1974). The Montecito Fault and Rincon Creek Fault are approximate in location and may not act as complete barriers to water movement thus in this report unit three is considered to be part of the Santa Barbara Groundwater Basin, although in the Montecito Water District Service area. The Toro Canyon Sub-basin, formally storage unit four, is included in the section on the Carpinteria Groundwater Basin because it is contiguous with that aquifer. However, the Toro Canyon Sub-basin is also within the Montecito Water District service area.

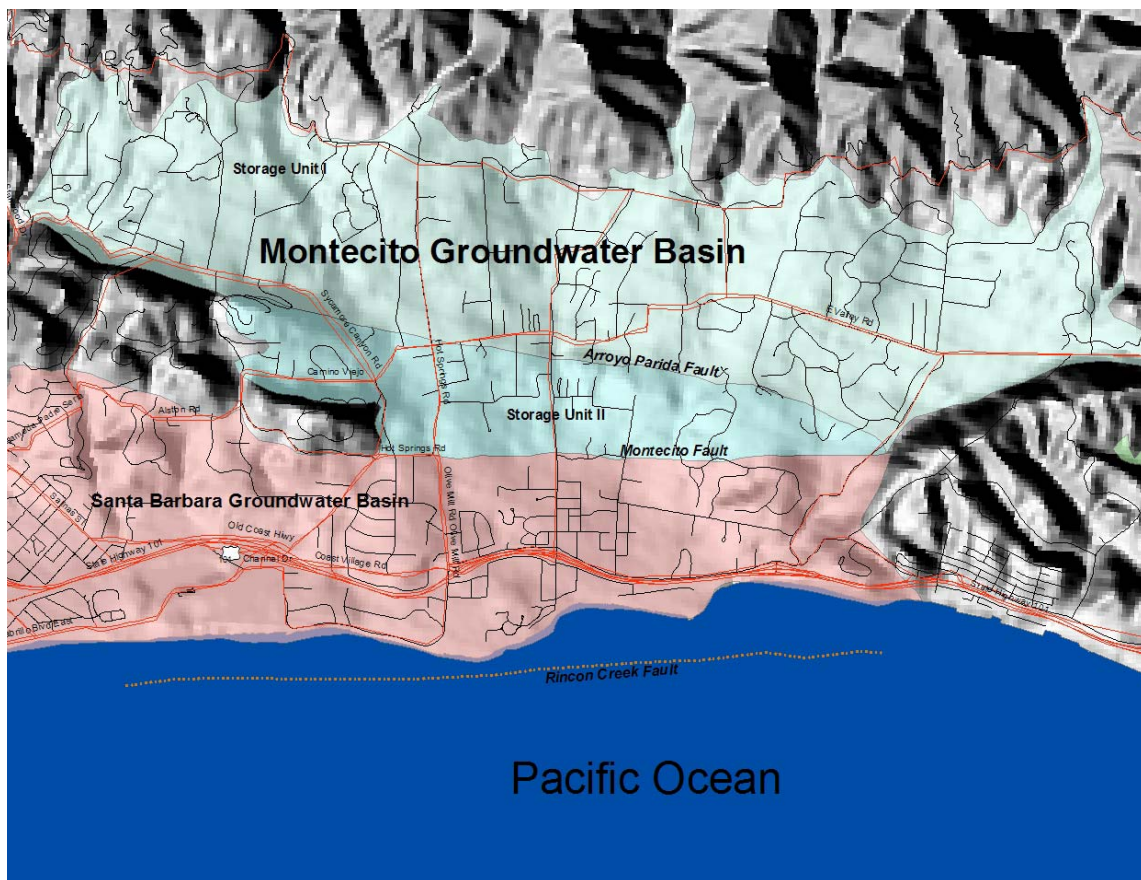


Figure 14: Montecito Groundwater Basin

Surface drainage occurs via several small creeks that flow from the Santa Ynez Mountains south to the Pacific Ocean: Cold Springs, Hot Springs, San Ysidro and Romero. Average precipitation within the basin ranges from about 18 inches per year near the coast to about 25 inches per year in the foothills of the Santa Ynez Mountains. The major water bearing geologic formations of the Montecito Groundwater Basin include the Casitas Formation and older alluvium. The Santa Barbara Formation is tapped by a few wells on the southeast fringe of the Basin. Some wells along the northern margin tap the consolidated Sespe Formation, but only for domestic purposes (Hoover, 1980).

### ***History and Analyses***

The basin is best described by Muir (1968), Geotechnical Consultants (1974), Brown and Caldwell (1978) and Hoover and Associates (1980). Total useable storage within the Montecito Groundwater Basin is estimated to be 7,700 Acre-Feet excluding the Toro Canyon Sub-basin (Slade, 1991). Groundwater from this basin supplies private residences and a small amount of agriculture within the Montecito area. Historically, water from Cachuma and Jameson reservoirs on the Santa Ynez River met roughly 95 percent of the water demand within the MWD service area. The remaining 5 percent of the demand was filled by groundwater. The importation of State Water Project supplies beginning in 1997 has substantially increased the water supply available in the Montecito area. In 2008 MWD imported 2680 AF of State Water. Currently, MWD gets 60% of its water from the Santa Ynez River System, 31% from the State Water Project, 4% from Doulton Tunnel and relies on the Montecito Groundwater Basin for 5% of its yearly production needs. The overall water supply available in the Montecito area is approximately 9,361 AFY, including groundwater and the available surface water sources. This figure includes 2,561 AFY from the Cachuma Project, 2,000 AFY from Jameson Lake (at 100% delivery), 450 AFY from Doulton Tunnel infiltration, 3,000 AFY of State Water (assuming a 100% allocation) and the Safe Yield of the groundwater basin of 1,350 AFY (for gross pumpage). MWD typically produces about 400 AFY from the Montecito Groundwater Basin. The remaining 950 AFY of Safe Yield Groundwater in the Montecito area is used by private pumpers. Water demand in the Montecito area was approximately 5,500 AFY according to a County study in 1992 which incorporated demand associated with approved projects and vacant lots. However, more recent study estimated a demand of near 9,000 AFY by the year 2030 using predicting build-out allowances coupled with individual usage patterns (Bachman, 2007). It is important to note that in most years State Water Project availability can be expected to be less than the maximum allocation, thus the overall water supply to the Montecito area is actually less than 9,361 AFY. In 2008 the Montecito Water District produced 7,085 AF of water.

Water demand in the Montecito area has been steadily increasing since the end of the last declared drought from 1987 through 1991. A sharp increase in water demand by customers beginning in the 2006-2007 fiscal year created a water shortage condition in the District's service area resulting in the adoption of a new conservation block rate structure and revisions to water usage reclassifications by MWD.

### ***Water Quality***

Water quality in the basin generally is suitable for agricultural and domestic use. Some wells near fault zones or coastal areas yield groundwater with elevated levels of TDS

and other constituents. Some of the MWD wells have minute amounts of iron and manganese which is treated and removed prior to distribution to customers. Studies indicate that seawater intrusion is not a significant problem in the basin. It is thought that deeper aquifers of the basin are protected from seawater intrusion by an impermeable offshore fault. However, some encroachment of seawater might occur in shallower aquifers during periods of heavy pumping such as during the early 1960s.

**2006-2008 Trends**

Similar to other South Coastal areas of Santa Barbara County, rainfall during the period was below average. Average rain for the three year period was 17.15 inches as compared to a long term average of 20.37 inches in central Montecito. This was mainly due to the extremely dry 2007 water year during which only 6.82 inches of rainfall was recorded. April, 2006 was wet as was January, 2007 but by themselves did not produce enough rain to create significant recharge to the Basin. The Montecito Water District maintains a groundwater monitoring network of about 70 sites to track water level changes. Water levels generally show a modest downward trend during the period 2006-2008. Figure 15 below of State Well 4N/26W-8P3 documents the fall during the 1987-1990 drought, the rise during the relatively wet 1990's and a slight decline since the peak following the extremely wet 1998 water year.

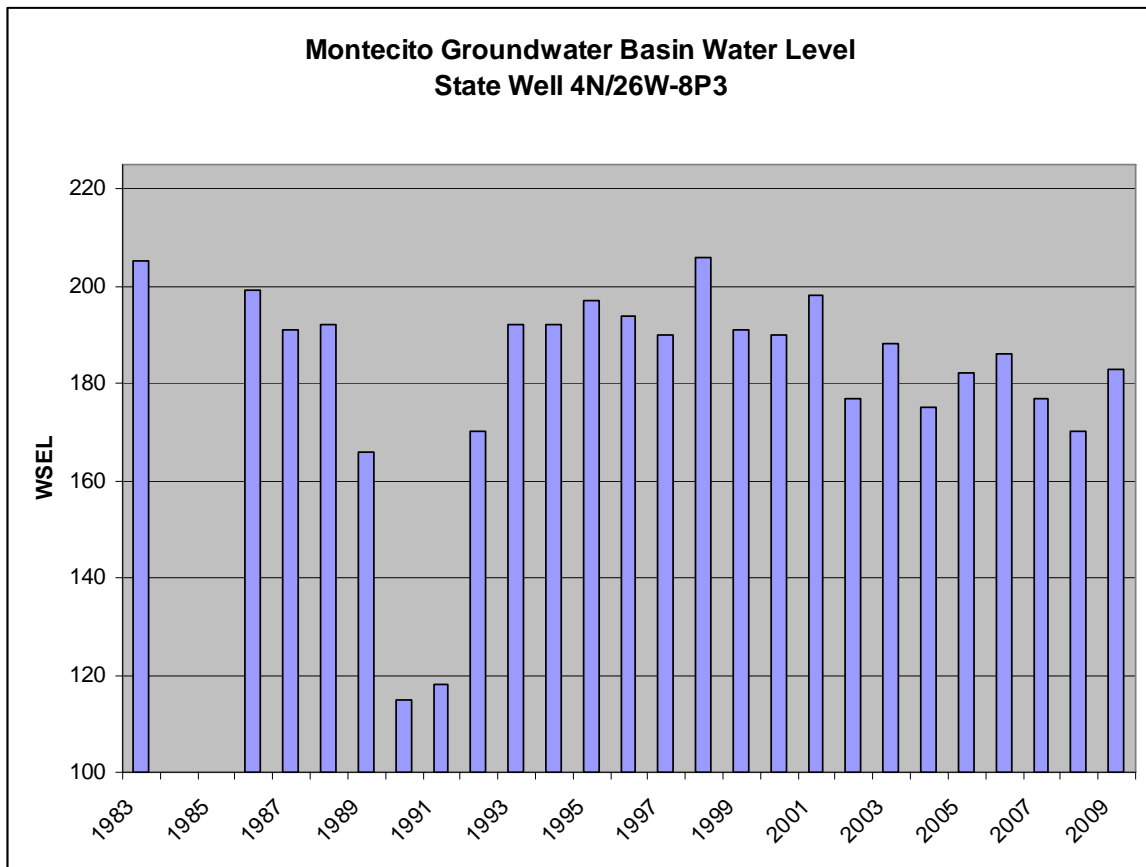


Figure 15: Hydrograph for State Well 4N/26W-8P3

# Santa Barbara Groundwater Basin

## Physical Description

The Santa Barbara Groundwater Basin underlies an area of about nine square miles nestled between the Montecito Groundwater Basin and the Foothill Groundwater Basin. It is defined by geologic faults that impede the flow of groundwater on its north, northwest and southwest sides, and the Pacific Ocean to the south. The basin includes two hydrologic units: Storage Unit #I northeast of the Mesa Fault (approximately 7 square miles) and Storage Unit #III southwest of the Mesa Fault (approximately 2.5 square miles). The boundary to the northeast is an approximate fault boundary mapped as the Montecito Fault first by Geotechnical Consultants in 1974. The separate Foothill Groundwater Basin discussed in the following section encompasses the hydrologic unit which includes the formerly designated Storage Unit #II of the Santa Barbara Basin and the former "East Sub-basin" of the Goleta Groundwater Basin (Freckleton, 1989).



Figure 16: Santa Barbara Groundwater Basin

The basin is divided into different depth zones based on the geohydrologic characteristics of permeability and transmissivity: the shallow zone, the upper producing zone, the middle zone, the lower producing zone and the deep zone (Martin, 1984). Annual rainfall within the Santa Barbara Basin varies with altitude and averages about 18 inches near the coast and up to about 21 inches in the higher elevations of the foothills of the Santa Ynez Mountains. The basin is drained by Sycamore, Mission, San



Roque and Arroyo Burro Creeks. All of these creeks flow intermittently in their lower reaches where they lose water to the unconsolidated deposits.

The major water bearing formation of the basin is the Santa Barbara Formation, consisting primarily of fine to coarse sand, silt and clay, with sporadic layers of gravel. The overlying older and younger alluvium consists of clay, silt, sand and gravel. Younger alluvium comprises major parts of the alluvial plain in the Santa Barbara area, extends along stream channels, and tongues into adjoining stream canyons (Freckleton et al., 1998).

### ***History and Analyses***

The basin is best described by Muir (1968), Brown and Caldwell (1973), SBCWA (1977), Martin (1984) and Freckleton (1989 and 1998). The capacity of the Santa Barbara Basin is estimated to be 23,000 AF (Brown and Caldwell, 1973). The water balance of the Santa Barbara Basin has been analyzed by the County on the basis of the overall water supply and demand within the City of Santa Barbara. Water supplies available to the City include the groundwater basin Safe Yield of 1,400 AFY (Freckleton, 1992), a State Water Project yield of up to 3,300 AFY, 8,277 AFY from Lake Cachuma, up to 5,000 AFY from Gibraltar Dam, 1,100 from Mission tunnel seepage, approximately 800 AFY from the recycled water program, and 3,125 AFY of desalination should the need arise. When operated according to the City's approved supply plan (currently being updated), these supplies provide a supply of 18,200 AFY.

Water demand has averaged 14,301 AFY, including 760 AFY of recycled water, over the period of 2006-2008. Groundwater historically constituted about 10 percent of the water supply for the City of Santa Barbara. However for 2006-2008 groundwater was used to meet 4% of the demand. Although groundwater in the basin is utilized by a few private businesses and homeowners, the City of Santa Barbara is the predominant groundwater user. This allows them to manage the storage and pumpage from the Basin. The City is currently managing the basin as an underground storage reservoir as part of an overall plan for the conjunctive use of the various City water resources, with most groundwater usage reserved for periods of depleted surface water.

### ***Water Quality***

TDS concentrations within the two basin units range anywhere from about 530 mg/l to over 2,000 mg/l. Some isolated wells exhibited higher TDS concentrations due to upwelling from Tertiary rocks that underlie the shallow zone in the coastal part of storage unit #III (Martin, 1984). Seawater intrusion occurred in some areas of the south basin where heavy pumping from municipal wells caused groundwater levels to drop as much as 100 feet in the late 1970's. More recently, samples with chloride concentrations greater than 1,000 mg/l taken from coastal wells have confirmed the presence of seawater intrusion. Groundwater pumping within the Santa Barbara Groundwater Basin has been required at much reduced levels compared to 1991. Effective pumping practices, together with groundwater injection programs have restored the previously existing gradient thereby reversing the trend of seawater intrusion.

### 2006-2008 Trends

Similar to other South Coastal areas of Santa Barbara County, rainfall during the period was below normal with an average for the three year period of 15.49 inches versus a long term average of 18.16 inches in downtown Santa Barbara. This was mainly due to the extremely dry 2007 water year during which only 6.41 inches of rainfall was recorded. Above average rainfall was recorded during both April, 2006 and January, 2007 but by themselves, these months did not produce enough rainfall to create significant recharge to the basin. The City of Santa Barbara maintains a groundwater monitoring network in conjunction with the United States Geological Survey to track water level changes and water quality within the basin. The network currently consists of about 70 sites. The hydrograph below from well 4N/27W-15E1 depicts water level fluctuations over time. There is a substantial drop during the 1987-1990 drought then significant recovery in the 1990s with the wet years of 1992, 1993, 1995 and 1998. The trend is generally downward during 2006-2008 with slight seasonal recovery.

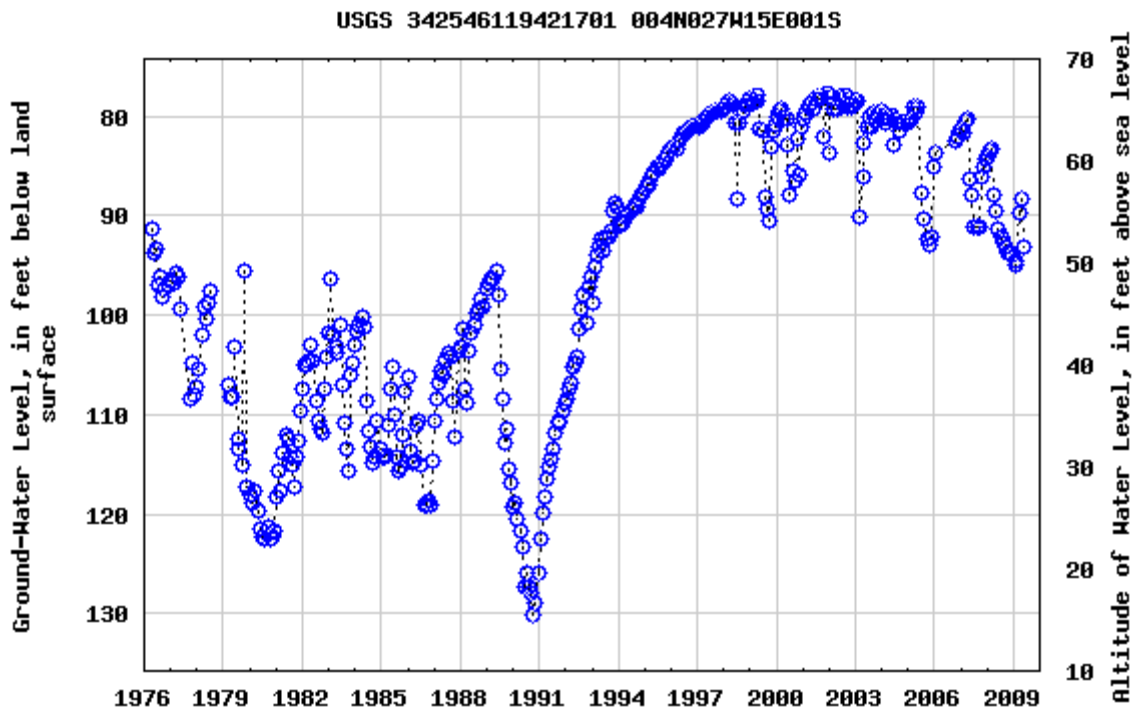


Figure 17: Hydrograph of State Well 4N/27W-15E1

# Foothill Groundwater Basin

## *Physical Description*

The Foothill Groundwater Basin is comprised of unconsolidated alluvial sediments which have accumulated along the base of the Santa Ynez Mountains in the northwest Santa Barbara and northeast Goleta areas. This basin encompasses about 4.5 square miles and extends from the outcrops of the underlying tertiary bedrock formations on the north to the Modoc fault and Goleta Fault on the west, the More Ranch and the Mission Ridge Faults on the south and bedrock on the east. The main drainages that traverse the basin are Cieneguitas, Arroyo Burro and San Rogue Creeks. This groundwater basin consists of younger alluvium, older alluvium and terrace deposits, and the Santa Barbara Formation. The Santa Barbara Formation is the principal aquifer of the basin and consists mainly of marine sand, silt and clay with a maximum thickness of about 400 feet (Freckleton, 1989). Prior to the late 1980s the Foothill Groundwater Basin was designated as Storage Unit #II of the Santa Barbara Groundwater Basin and the former "East Sub-basin" of the Goleta Groundwater Basin. The basin was later redesignated as a separate hydrologic unit after geo-hydrologic data showed that the above mentioned faults impede groundwater exchange between the adjacent Santa Barbara and Goleta Groundwater Basins.

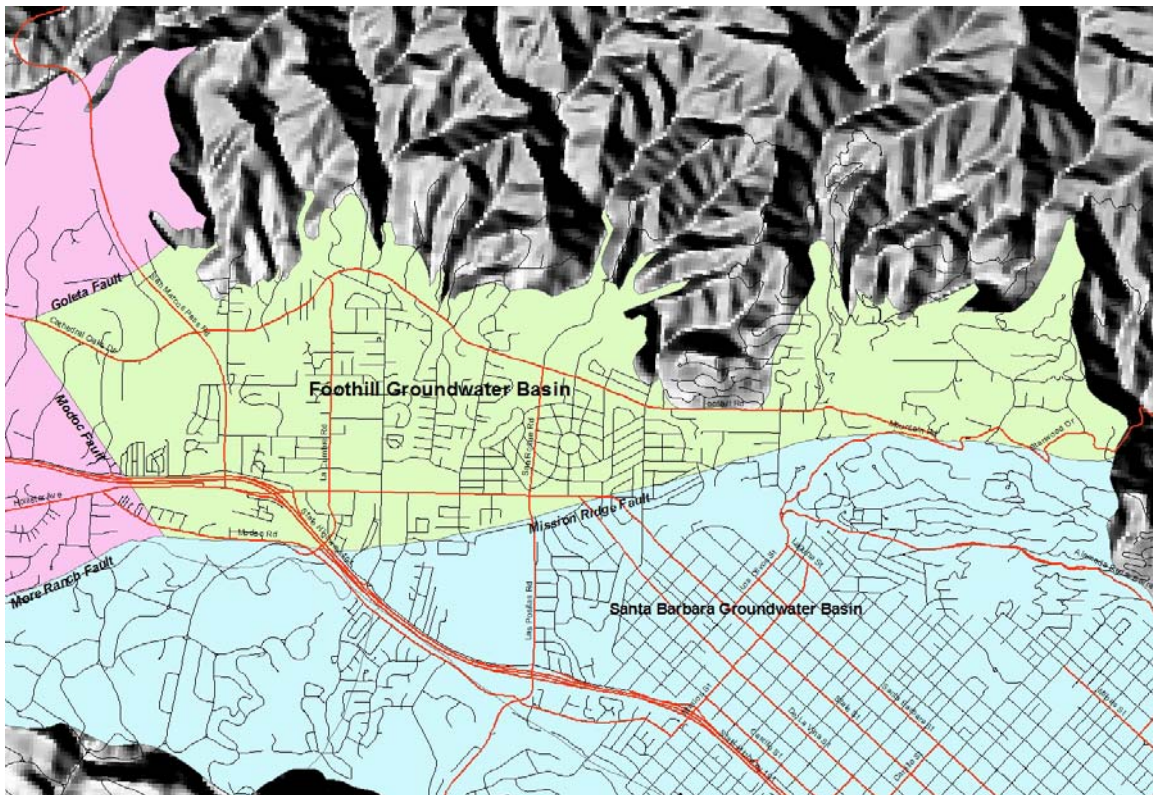


Figure 18: Foothill Groundwater Basin

## History and Analyses

The Foothill Groundwater Basin is best described by Freckleton (1989). Safe Yield is estimated to be 953 AFY (gross pumpage) based on the 1989 USGS study. Available Storage of the Foothill Basin is estimated to be 5,000 AF. Demand on the basin falls into three categories: pumpage by the City of Santa Barbara, pumpage by the La Cumbre Mutual Water Company (LCMWC) and extractions by private landowners. Pumpage of the Basin was at its maximum around 1950 at 2,400 AFY and during that time the basin water levels dropped substantially but have since recovered due with the introduction of other water sources. The City of Santa Barbara has historically injected and stored surface water in the basin but has halted the practice with recent reduction in demand. However, the City still has injection capability that it may again utilize.

The supply/demand status of this basin has been analyzed by the County (Baca, 1993). Pumpage of the basin, including commitments to approved projects was estimated to be 945 AFY. This estimate accounts for a City of Santa Barbara/LCMWC agreement through which the City of Santa Barbara treats and delivers the LCMWC's contracted State Water Project amount of up to 1000 AFY (plus 100 AF drought buffer). As part of the agreement, LCMWC limits their groundwater extraction from the Foothill Basin to 300 AFY on a five year running average. The City and LCMWC account for about 80% of basin pumpage and with the active management of the basin by the City of Santa Barbara and LCMWC, the Foothill Basin is considered not to be in overdraft.

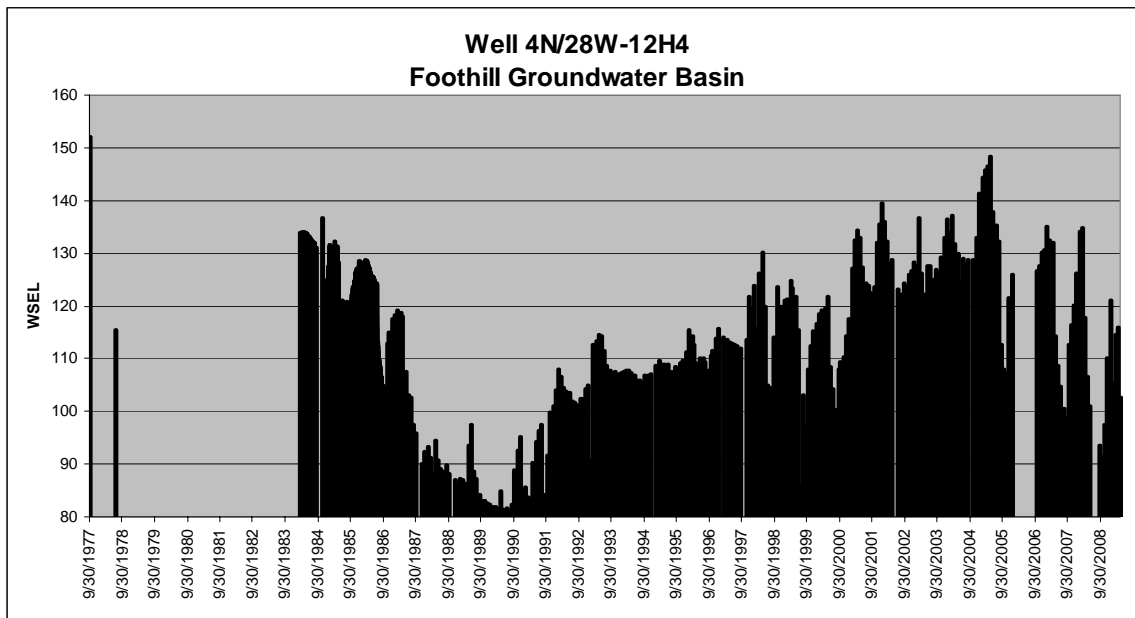


Figure 19: Hydrograph for State Well 4N/28W-12H4

### ***Water Quality***

Eight wells were sampled for water quality as part of the 1989 USGS study. Analyses of water from these wells indicated general water quality to be classified as very hard with dissolved solids, chloride, sodium and sulfate all equaling or exceeding secondary standards in most wells sampled. Nitrate (reported as nitrate plus nitrite or total nitrogen) exceeded primary drinking water standards in two of the eight wells sampled. TDS concentrations were relatively high, ranging from 610 to 1,000 ppm in 7 wells sampled in the basin. Chloride concentrations in this basin were relatively low (44 to 130 ppm) in the seven wells (Freckleton, 1989). Note that an eighth well was sampled in the USGS study from which poor quality water (TDS 1,900 ppm, chloride 360 ppm) was recovered. This well, however, is known to produce water from bedrock aquifers below the sediments that comprise the Foothill Basin.

### ***2006-2008 Trends***

As with other South Coastal areas rainfall during the period was below average with an average for the three year period of 15.19 inches versus a long term average of 18.16 inches. This was mainly due to the extremely dry 2007 water year which recorded only 6.41 inches of rainfall. April 2006 was wet as was January 2007 but by them selves did not produce enough rainfall to create significant recharge to the Basin. Figure 19 on the previous page is a hydrograph of State Well 4N/28W-12H4 which exhibits the increasing water level trend following the 1987-1990 drought as well as falling water levels since the peak after the extremely wet 2005 water year.



## Goleta Groundwater Basin

### *Physical Description*

The Goleta Groundwater Basin lies immediately West of the Santa Barbara and Foothill Groundwater Basins on Santa Barbara County's South Coast. It is about eight miles long and three miles wide including the hydraulically connected alluvial materials extending into the drainages along the northern border. The Goleta Groundwater Basin is divided into three Sub-basins: the Central Sub-basin, the West Sub-basin and the North Sub-basin. The Central Sub-basin is separated from the West Sub-basin by an inferred low permeability barrier that separates areas of differing water quality. The North Sub-basin is separated from the Central Sub-basin by a fault that appears to form a partial hydraulic impediment to groundwater flow (URS, 2005). Both the Central Sub-basin and the West Sub-basin are bordered on the south by the More Ranch Fault. Although originally defined as portions of a larger basin, these three hydrologic units are distinct and have been analyzed and described in planning and legal documents as separate basins.

Goleta is an alluvial plain, bordered by the Santa Ynez Mountains to the north and the Pacific Ocean to the south. Average rainfall within the basin ranges from about 16 inches per year at the coast to about 20 inches per year at the basin's highest elevation in the foothills of the Santa Ynez Mountains. Surface drainage is to the south toward the Goleta slough through several creeks which empty into the ocean including Atascadero, Maria Ygnacio, San Jose, Tecolotito, and San Pedro.

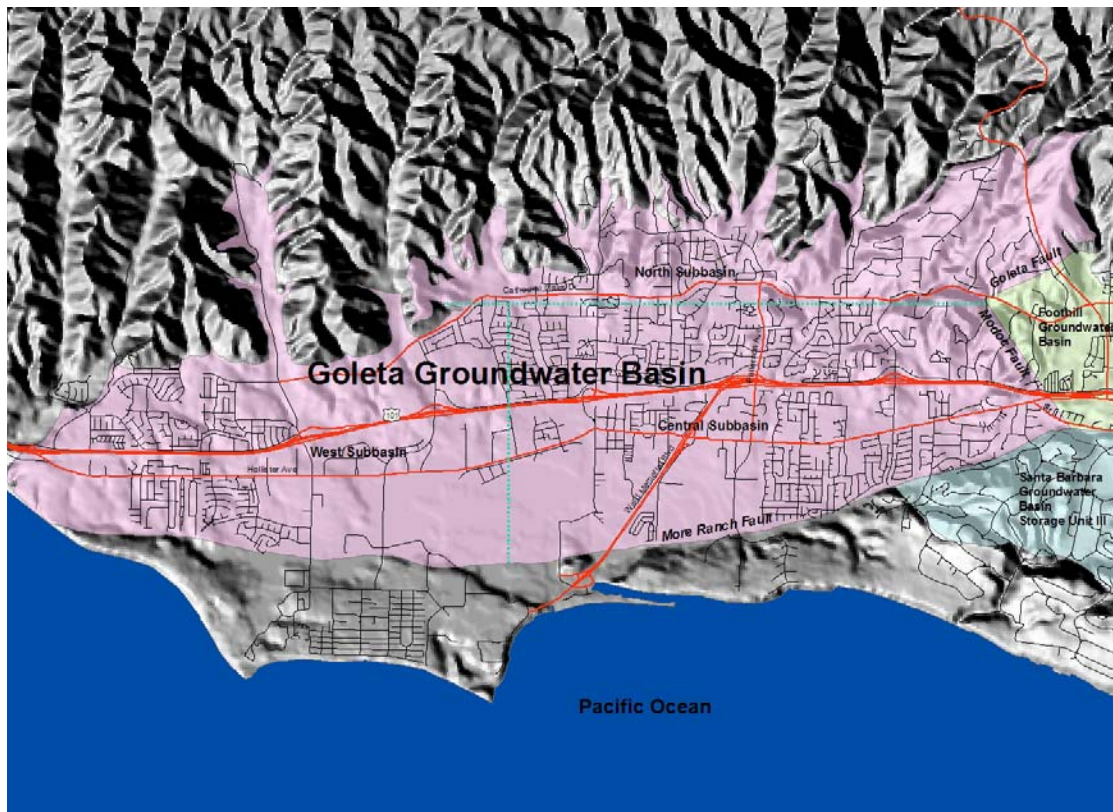


Figure 20: Goleta Groundwater Basin

## ***History and Analyses***

The Goleta Groundwater Basin is best described by Upson (1951), Evenson et al., (1962), Mann (1976), SBCWA(1977), Hoover (1980, 1981) and CH2MHILL (2005). Total storage in the basin is estimated to be about 400,000 AF. Total storage available for the Central and North Sub-basins (defined as water to the bottom of screened intervals on production wells - see Groundwater Terms, page 5) is about 200,000 AF. Useable or "working" storage, defined as between historical high and low water levels is estimated to be 35,000 to 70,000 AF (CH2MHILL, 2004). Perennial Yield of the Central and North Sub-basins is estimated to be 3,700 AFY (Wright Judgment, 1989) and Perennial Yield of the West Sub-basin is estimated to be 500 AFY (SBCWA, 1992).

Historically, this basin was in a state of overdraft. Prior to the construction of the Cachuma Project in 1959, groundwater served as the sole source of water for the Goleta area. Pumping patterns through the 1985 peak of over 8,500 AFY, led to some of the lowest recorded water level readings in the basin. In some areas, these lasted through the 1987-1990 droughts. The state of overdraft resulted in lengthy legal proceedings and a long-term moratorium on new water connections within the Goleta Water District (GWD). The Wright Judgment in 1989 served to adjudicate the water resources of this basin and assigned quantities of the basin Safe Yield to various parties, including 2,350 AFY to the GWD and 1,000 AFY on a 10 year running average to the La Cumbre Mutual Water Company (LCMWC). The judgment also ordered the GWD to bring the North and Central Basin into a state of hydrologic balance by 1998. The GWD has achieved compliance with this order through the importation of State Project Water and the development of recycled water. These supplemental supplies have offset the court mandated reduction in pumpage from the basin. Since 1993 pumping has averaged about 1,000 AFY and groundwater levels have dramatically risen. Given that the basin has been adjudicated and the court decision controls pumpage, overdraft is not foreseeable in the North and Central Sub-basins.

Available Storage of the Goleta West Sub-basin is estimated to be around 7,000 AF. Perennial Yield is estimated to be 500 AFY (Baca et al., 1992). Pumpage in the Goleta West Basin is approximately 232 AFY (GWD, 1992) and is entirely attributable to private landowners. Thus, based on the most recent analysis the West Sub-basin has a surplus of 268 AFY. This state of surplus is anticipated to extend for many years into the future, given the availability of high quality supplies from the GWD and the generally poor quality of the water in this hydrologic unit.

The overall water supply available in the Goleta area is approximately 18,222 AFY, including groundwater and the available surface water sources. This figure includes 9,322 AFY from the Cachuma Project, 3,800 AFY of State Water (allocation is 7,450 AFY), Perennial Yield of the groundwater basin of 4,100 AFY (including the West Sub-basin) and recycling of about 1,000 AFY. Water demand in the Goleta area during the period 2006-2008 averaged 14,382 AFY.

## ***Water Quality***

Areal differences in groundwater are one of the primary reasons for originally dividing the Goleta Groundwater Basin into separate sub-basins. The Central Sub-basin, from which most water is extracted, contains the lowest TDS concentrations, averaging about 770 mg/l. The Central Sub-basin also has lower amounts of chloride averaging 65 mg/l

to 80 mg/l as compared to over 200 mg/l in the West Sub-basin. Chloride concentrations are a particular problem in low lying areas of the basin near tidal marshes. While high chloride concentrations are one indication of seawater intrusion, observation wells near the Goleta Slough area also exhibited correspondingly high concentrations of sulfate, a mineral not normally found in significant quantities in seawater (SBCWA, 1977). There is currently no evidence of seawater intrusion. In addition, seawater intrusion is not likely to have occurred at any time due to the rock formations and the More Ranch Fault along the coast which act as barriers to groundwater migration. Near-surface, low permeability sediments cause the southern portion of the Central, North and West Sub-basins to be under confined conditions. These sediments provide a barrier to potential surface sources of water quality degradation such as agricultural return flow or infiltration of brackish water in the overlying Goleta Slough. In some areas high TDS perched water is present in shallow aquifers above the confining layers. This water is not in general use. Water quality in the North and Central Sub-basins is sufficient for many agricultural uses but might require treatment for domestic uses. The significant water quality issue for drinking water in the Central Sub-basin is the presence of iron and manganese, with most wells above the secondary drinking water standard. These elevated constituents require treatment of groundwater prior to serving the water to customers. Water in the West Sub-basin requires treatment for domestic use and may be used for irrigation of only a limited variety of crops.

### ***2006-2008 Trends***

Similar to other areas within Santa Barbara County, rainfall during the period was below average with an average for the three year period of 16.23 inches as compared to a long term average of 18.69 inches in Goleta. This was mainly due to the extremely dry 2007 water year during which only 7.40 inches of rainfall was recorded. April 2006 was wet as was January 2007 but by themselves these months did not produce enough precipitation to create significant recharge to the basin. The Goleta Water District maintains a groundwater monitoring network in conjunction with the United States Geological Survey to track water level changes within the basin. The network currently consists of 47 sites. The hydrograph shown in Figure 21 on the following page from well 4N/28W-9J2 in the Central Sub-basin depicts water level fluctuations over time. There is a substantial decline which reaches its minimum during the 1987-1990 drought. The water level significantly recovers in the 1990s with the wet years of 1992, 1993, 1995, 1998 and 2005. However, since 2007 the trend is generally downward in most areas of the Goleta Groundwater Basin.



USGS 342623119484101 004N028W09J0025

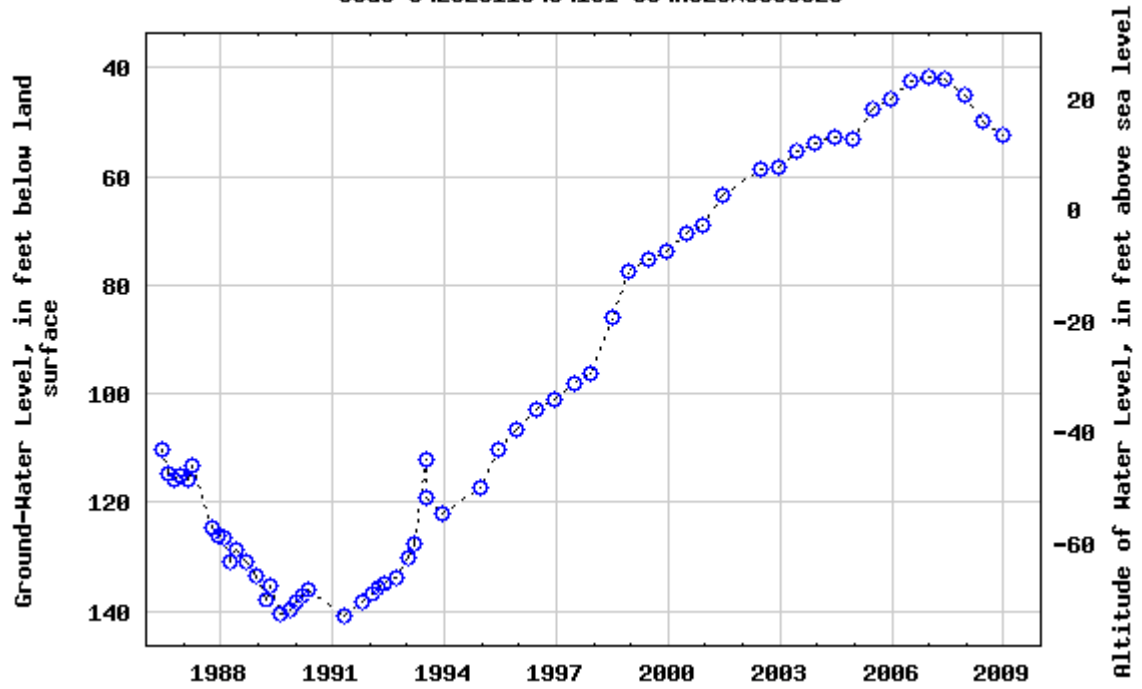


Figure 21: Hydrograph of State Well 4N/28W-9J2

## **Groundwater Basins of the Santa Ynez River Watershed**

The Groundwater Basins of the Santa Ynez River Watershed lie between the San Rafael Mountains to the north and east, the Purisima Hills to the northwest and the Santa Ynez Mountains to the south. East-west oriented folds and faults of the region control the shape and location of these basins. In addition, formation of the basins has been influenced by the former stages and flow of the Santa Ynez River, creating the terraces and uplands that comprise some of the primary aquifers.

Investigations on the water resources of the drainage basin have been conducted by the Bureau of Reclamation, the United States Geological Survey, the California Department of Water Resources, as well as local agencies such as the Water Agency (SBCWA), the Santa Ynez River Water Conservation District (SYRWCD) and local water purveyors. The SYRWCD, formed in 1939 to protect the water rights of users, produces an annual report on the conditions of the water resources within the drainage basin. During dry periods the SYRWCD may call for water releases from Lake Cachuma to recharge downstream groundwater in accordance with Water Rights Order 89-18.

The Santa Ynez River Water Conservation District ID#1 (SYRWCD ID#1) serves water to the areas of Santa Ynez, Solvang, Los Olivos, Ballard and the Santa Ynez Band of Chumash Indians in a portion of the Santa Ynez Uplands Groundwater Basin. SYRWCD ID#1 has studied the basin extensively and employs a conjunctive use strategy utilizing all of its supplies (State Water, Cachuma Project Water, Groundwater from the Santa Ynez Uplands Groundwater Basin and Groundwater from the Santa Ynez River Alluvial Basin) to provide reliability in a wide range of hydrologic conditions.

Other Water Purveyors in the Watershed include the City of Solvang, the City of Buellton, the City of Lompoc, Vandenberg Village Community Services District, Mission Hills Community Service District and many smaller mutual water companies. Each relies on groundwater to some extent as its source of supply. Vandenberg Air Force Base and the Federal Prison lie partly within the Watershed but rely on State Water and groundwater from the San Antonio Groundwater Basin.

Following is a discussion of the Groundwater Basins of the Santa Ynez River Watershed from east to west (upstream to downstream) as well as the Santa Ynez River Riparian Groundwater Basin. Figure 22 on the following page shows the Groundwater Basins within the Santa Ynez River Watershed and their relationship to the boundaries of the Santa Ynez River Water Conservation District and the SYRWCD ID#1.

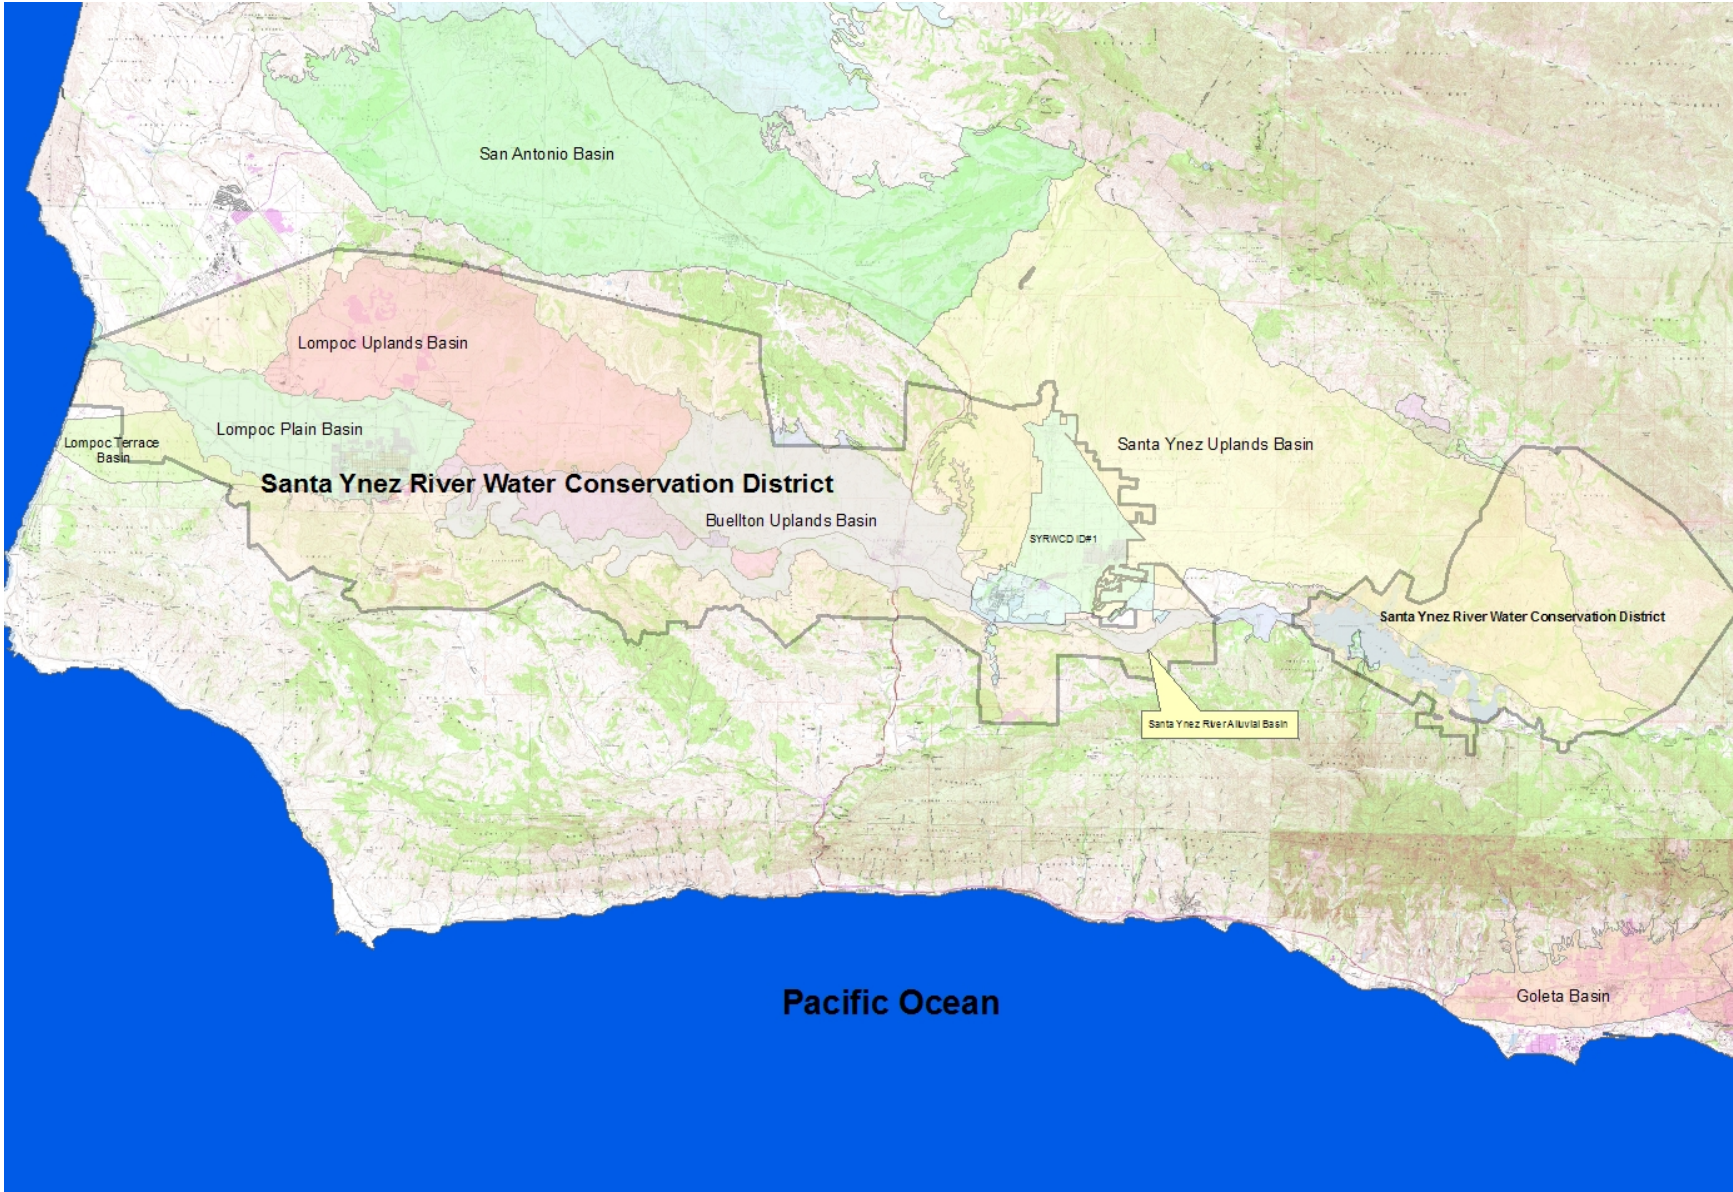


Figure 22: Santa Ynez River Water Conservation District Boundaries



## Santa Ynez Uplands Basin

### Physical Description

The Santa Ynez Uplands Groundwater Basin underlies 130 square miles located about 25 miles east of Point Arguello and north of the Santa Ynez River. The basin is wedge shaped, narrowing to the east. It is bounded by a topographical groundwater divide (from the San Antonio Basin) to the northwest, faults and the impermeable rocks of the San Rafael Mountains to the north and east, and impermeable rock formations that separate it from the Santa Ynez River Alluvial Basin to the south. Average rainfall within the basin varies from a maximum of about 24 inches per year in the higher elevations to a minimum of about 15 inches per year in the southern and central areas. Rainfall and stream seepage are the primary sources of recharge to the basin.

### SANTA YNEZ UPLANDS GROUNDWATER BASIN

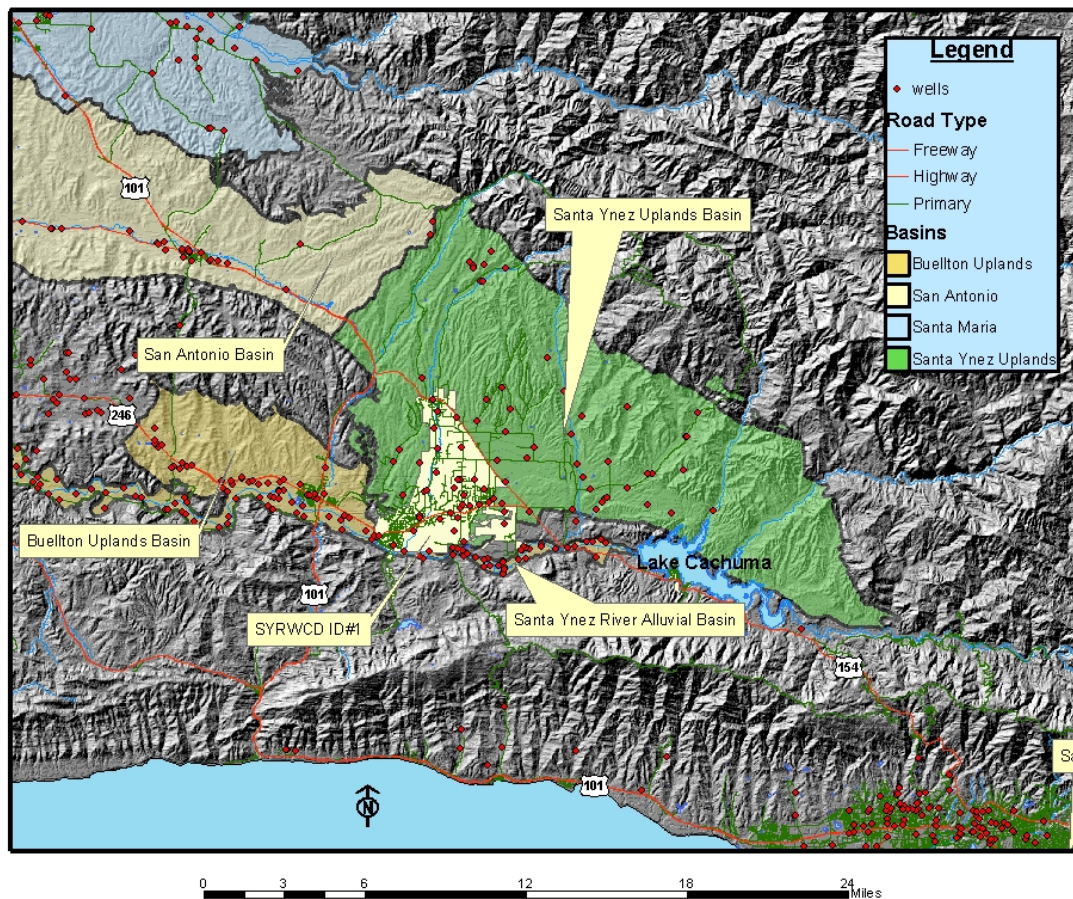


Figure 23: Santa Ynez Uplands Groundwater Basin

### History and Analyses

The basin is best described by Upson and Thomasson (1951), Wilson (1957), LaFreniere and French (1968) and SBCWA (1977). These reports describe the basin in

terms of the geologic setting and groundwater resources of the area. Work by Singer (1979) and Hamlin (1985) add to the information and focus on water resources for the Santa Ynez Indian Reservation, as well as the water quality of the area. In addition, the Santa Ynez River Water Conservation District (SYRWCD) produces an informative annual report to satisfy conditions of levying fees within its District boundaries.

The Paso Robles Formation is the major aquifer in the Santa Ynez Upland Groundwater Basin. The formation consists of poorly consolidated gravel, sand, silt and clay (LaFreniere and French, 1968). In places it is difficult to distinguish the Paso Robles formation from overlying terrace deposits. The Careaga Sand lies underneath the Paso Robles formation but due to its great depth few wells tap it throughout all but the marginal areas of the basin.

Upson and Thomasson in 1951 noted that the withdrawal of water from irrigation wells on the Santa Ynez Upland and elsewhere in the subarea had not yet altered the natural discharge of approximately 4,000 Acre-Feet per year to the Santa Ynez River Alluvial Corridor. In 1968 LaFreniere and French estimated a decline in storage of 44,000 Acre-Feet based on water level declines during the period 1945-1964 and a decline in surface water discharge to 2,600 Acre-Feet per year.

A 1992 analysis by SBCWA indicated a gross overdraft of about 2,000 Acre-Feet per Year. However, pumping pattern changes and importation of State Water in the 1980s and 1990s significantly altered the amount of water extracted from the basin. SYRWCD ID#1 shifted much of its pumping to the alluvial corridor and State Water Project deliveries began in 1997. In 2002 SBCWA commissioned Hopkins Groundwater Consultants, Inc. to provide an independent review of the SBCWA findings and conclusions in this study. Hopkins determined that the water budget deficit was most likely still on the order of approximately 2,000 Acre-Feet per year under historical groundwater demand conditions, but recent changes in basin demand and increases in imported water resulted in a basin that was balanced or in a state of slight surplus.

Available Storage within the Santa Ynez Uplands Groundwater Basin is estimated to be about 900,000 AF (La Freniere and French, 1968). Safe Yield of this basin is estimated to be 11,500 AFY (for gross pumpage). Estimated pumpage of the basin is 11,000 AFY (SBCWA 2001).

Groundwater supplies about 85% of the water demand within the basin. In addition, water is imported into the basin from the Cachuma Project, the State Water Project, and the Santa Ynez River Alluvial Basin. Agriculture accounts for about 75% of the water demand within the basin; the remaining demand is mostly from urban consumers.





Figure 24: Agricultural Production Well 7N/30W-25Q2 in Marre Canyon

The basin is pumped by the City of Solvang, the SYRWCD ID#1, which serves the Santa Ynez and Los Olivos areas, and by private agricultural and domestic users. SYRWCD ID#1 and the City of Solvang also pump from the Santa Ynez River Alluvial Basin. This alluvial basin is described on page 55. Table 4, on the following page illustrates actual pumping from the two water districts and estimated pumping from the private agricultural and domestic users within the groundwater basin during the period 2006 through 2008.

The SYRWCD ID#1 holds a State Water allocation of 2000 AFY and a 200 AF drought buffer. 1500 AFY are contractually committed for use by the City of Solvang. The drought buffer effectively increases the amount of water to be delivered in the event that overall deliveries are reduced by a given percentage. Contracting agencies typically do not request their full State Water allocation but use the State Water as a supplement to their other water sources. For a complete listing of State Water deliveries please see State Water Project Deliveries, Page 13. SYRWCD ID#1 is credited with importing water into the Basin via the Cachuma Project, the State Water Project and the Santa Ynez River Alluvial Basin employing a conjunctive usage strategy. It is important to note that the SYRWCD ID#1 does not receive actual Cachuma Project water, but is delivered an equivalent volume of State Water through an Exchange Agreement with the South Coast members of the Cachuma Project. By the terms of this agreement, the SYRWCD ID#1's

share of Cachuma Project water is delivered to other Cachuma Project Members on the South Coast. This program reduces pumping and treatment costs.

**Pumping of Groundwater from the Santa Ynez Uplands and Riparian Basin  
Fiscal Years 2006-2008**

<b>Pumper</b>	<b>Area</b>	<b>2006</b>	<b>2007</b>	<b>2008</b>
City of Solvang	SY Uplands	99 Acre-Feet	143 Acre-Feet	191 Acre-Feet
	SY Riparian	102 Acre-Feet	200 Acre-Feet	183 Acre-Feet
Santa Ynez River Water Conservation District ID#1	SY Uplands	956 Acre-Feet	1,638 Acre-Feet	1,523 Acre-Feet
	SY Riparian	847 Acre-Feet	1,885 Acre-Feet	1,868 Acre-Feet
Private Agricultural and Domestic Users ( <i>estimated</i> )	SY Uplands	9,000 Acre-Feet	12,000 Acre-Feet	9,000 Acre-Feet
	SY Riparian	7,000 Acre-Feet	10,000 Acre-Feet	7,000 Acre-Feet

Table 4: Santa Ynez Uplands and Riparian Groundwater Basin Pumping Amounts, 2006-2008

The observation well used to generate the hydrograph shown in Figure 25 on the following page is located in the central part of the Santa Ynez Uplands groundwater basin. From this hydrograph a general dewatering trend of the basin can be deduced beginning around 1960 and continuing until the end of the 1987-1991 drought. A significant water level rise occurs during the exceptionally wet 1990s followed by recent stabilization. Most of the wells within the Santa Ynez Uplands Basin extract from a source several hundred feet below ground surface. Therefore, a two to four year lag between the occurrence of stream seepage and rainfall percolation and corresponding water level changes in observation wells is not uncommon. It is also important to note that water suppliers within the area periodically shift their pumping patterns to draw more water from the Santa Ynez River Alluvial Basin and less from the Uplands Basin. This may result in more stable water levels in the Uplands area but may also reduce water levels in the Alluvial Basin. The primary reason for these periodic shifts in pumping patterns is to efficiently manage water supply and quality from the sources available.

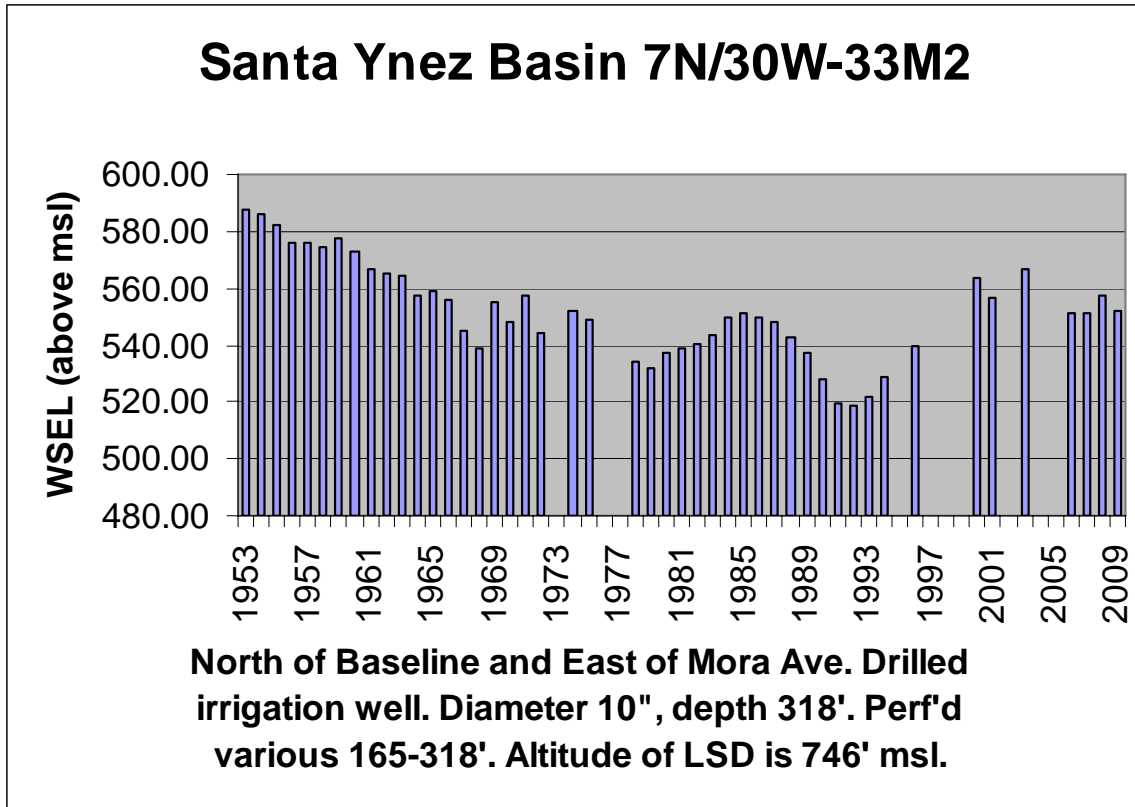


Figure 25: Hydrograph of State Well 7N/30W-33M2

**Water Quality**

Water quality within the basin is generally adequate for most agricultural and domestic purposes. The USGS report 84-4131 (Hamlin, 1985) focuses on water quality within the Uplands as well as adjacent basins and should be consulted for water quality information on this area.

**Total Dissolved Solids**

Studies completed in 1970 indicate TDS concentrations ranging from 400 to 700 mg/l. Although recent water quality data are limited, samples analyzed by the USGS in 2002 exhibited an average TDS concentration of around 490 mg/l. The graph on the following page indicates that since the 1960s TDS concentrations in the Basin have been relatively stable, with only a minor trend upward in the last 20 years. The state standard for TDS in drinking water is 1000 mg/l (see Drinking Water Standards section on page 7). Note that no water quality data was collected at this site from 1979 through 1987. As is the case in many other areas of the County, quality from the water table aquifers or shallow water in some areas of the Santa Ynez Uplands Basin is dramatically worse than that from deeper or confined aquifers.



## Nitrates

According to data collected from State Well 7N/30W-30M1 nitrogen in the aquifer as *Nitrogen Nitrite plus Nitrate dissolved in mg/l* has increased since the late 1970s from 1 mg/L to near 5 mg/L but is still below the state drinking water standard of 10mg/l. Septic systems are believed to be the cause of increasing nitrogen in the Los Olivos and Ballard areas.

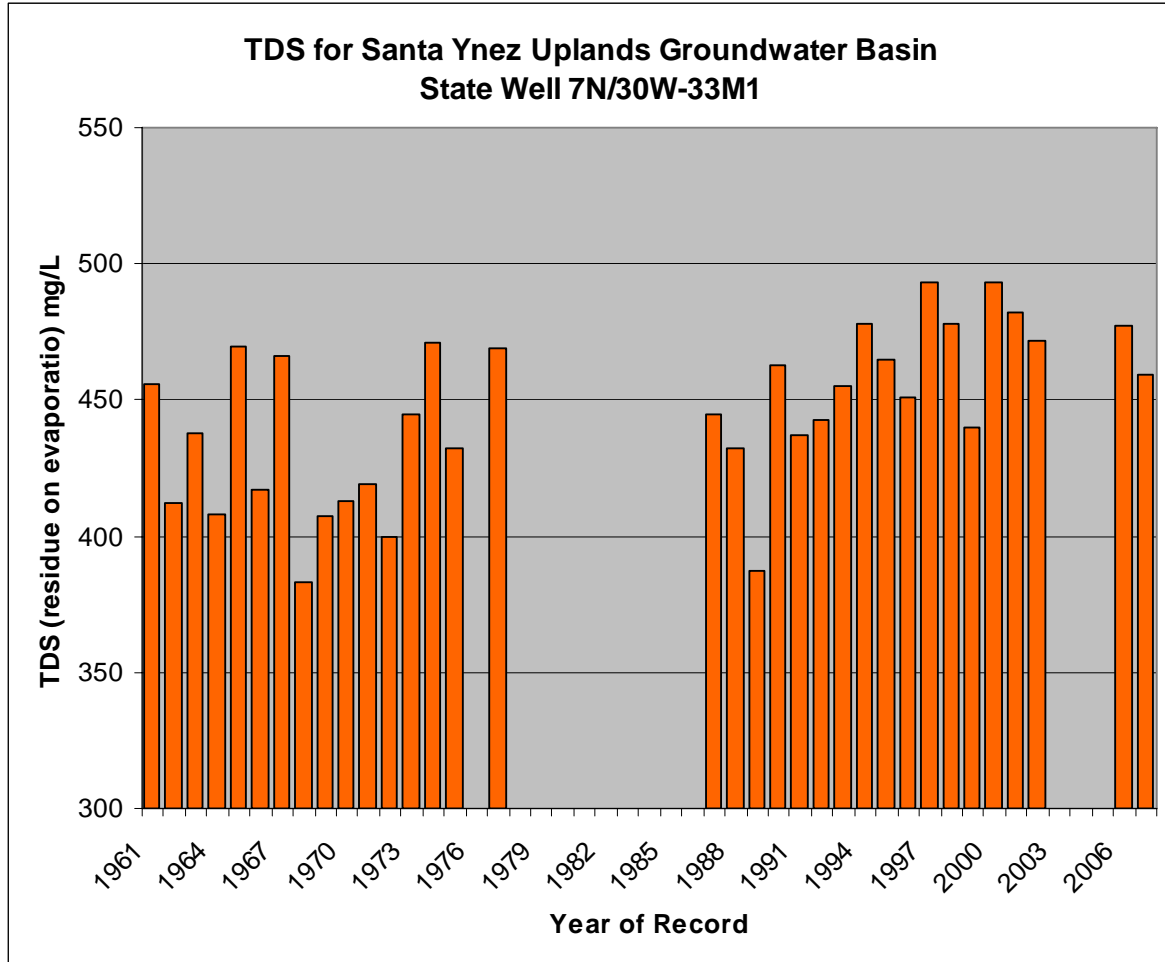


Figure 26: Total Dissolved Solids for State Well 7N/30W-33M1

## Sulfates

Sulfates in the Santa Ynez Upland Groundwater Basin have been relatively stable in the last 40 years at around 20-23 mg/l. The exception to this appears in late 1983 when 41 mg/l was measured. Rainfall was extremely high throughout the area in 1983 and considerable recharge to the aquifer was initiated. It is possible that this “1983” measurement was not representative of conditions of that year or long term conditions.

### **2006-2008 Trends**

Rainfall during the period was slightly below average with an average for the three year period of 13.34 inches as compared to a long term average of 15.72 inches at the Santa

Ynez Fire Station. This was mainly due to the extremely dry 2007 water year during which only 6.58 inches of rainfall was recorded. Only minor recharge to the groundwater basin occurred in 2006 and 2008, thus a decline of water levels in the basin would be expected over the next few years.

During the period 2006 through 2008 ground water quality was measured at one site in the basin and water level was monitored at 46 sites. There was little change in total dissolved solids, calcium, magnesium, nitrates and sulfates during the 2006-2008 timeframe. Chemical analyses indicate that the water quality in this area has not been degraded over the past few years and is within both agricultural and domestic usage standards. As of 2008 most wells in the basin are down two to four feet on average due to the lack of significant recharge since 2005.

## **The Santa Ynez River Alluvial Groundwater Basin**

The Santa Ynez River Alluvial Groundwater Basin consists of the unconsolidated sand and gravel alluvial deposits of the Santa Ynez River. These deposits are up to 150 feet thick and several hundred feet across, and extend 36 miles from Bradbury Dam to the Lompoc Plain. Storage within the upper 50 feet of the basin is about 90,000 AF. This figure is based upon work done by SBCWA staff following USGS WSP 1107 and WRCB Decisions 73-37 and 89-18. Groundwater in the Alluvial Groundwater Basin is in direct hydraulic communication with surface flow of the river.

Inflow to the basin is from infiltration of river flow, direct percolation from rainfall and underflow from adjacent basins (Santa Ynez Uplands, Buellton Uplands, and the Santa Rita area of the Lompoc Uplands Groundwater Basin). In accordance with existing requirements included in State Water Resources Control Board Water Rights Decisions, water is released from Cachuma Reservoir to recharge the Alluvial Basin based on water levels in monitoring wells and "credits" of water held in reservoir storage. In addition, small amounts of recharge to the Santa Ynez River Alluvial Groundwater Basin can occur when water is released from Lake Cachuma to the riverbed for Endangered Species Act purposes under certain hydrological conditions detailed in the Biological Opinion for the U.S. Bureau of Reclamation Operation and Maintenance of the Cachuma Project. Thus, the Cachuma Project at certain times controls basin water levels. This basin is not subject to overdraft (i.e. a progressive long-term drop in water levels) because the average annual flow to the Santa Ynez River (the main recharge source) is greater than the volume of the basin. Water is extracted from this basin for municipal and agricultural uses by many entities both private and public.

Figure 27 on the following page illustrates the location of the Santa Ynez River Alluvial Groundwater Basin.

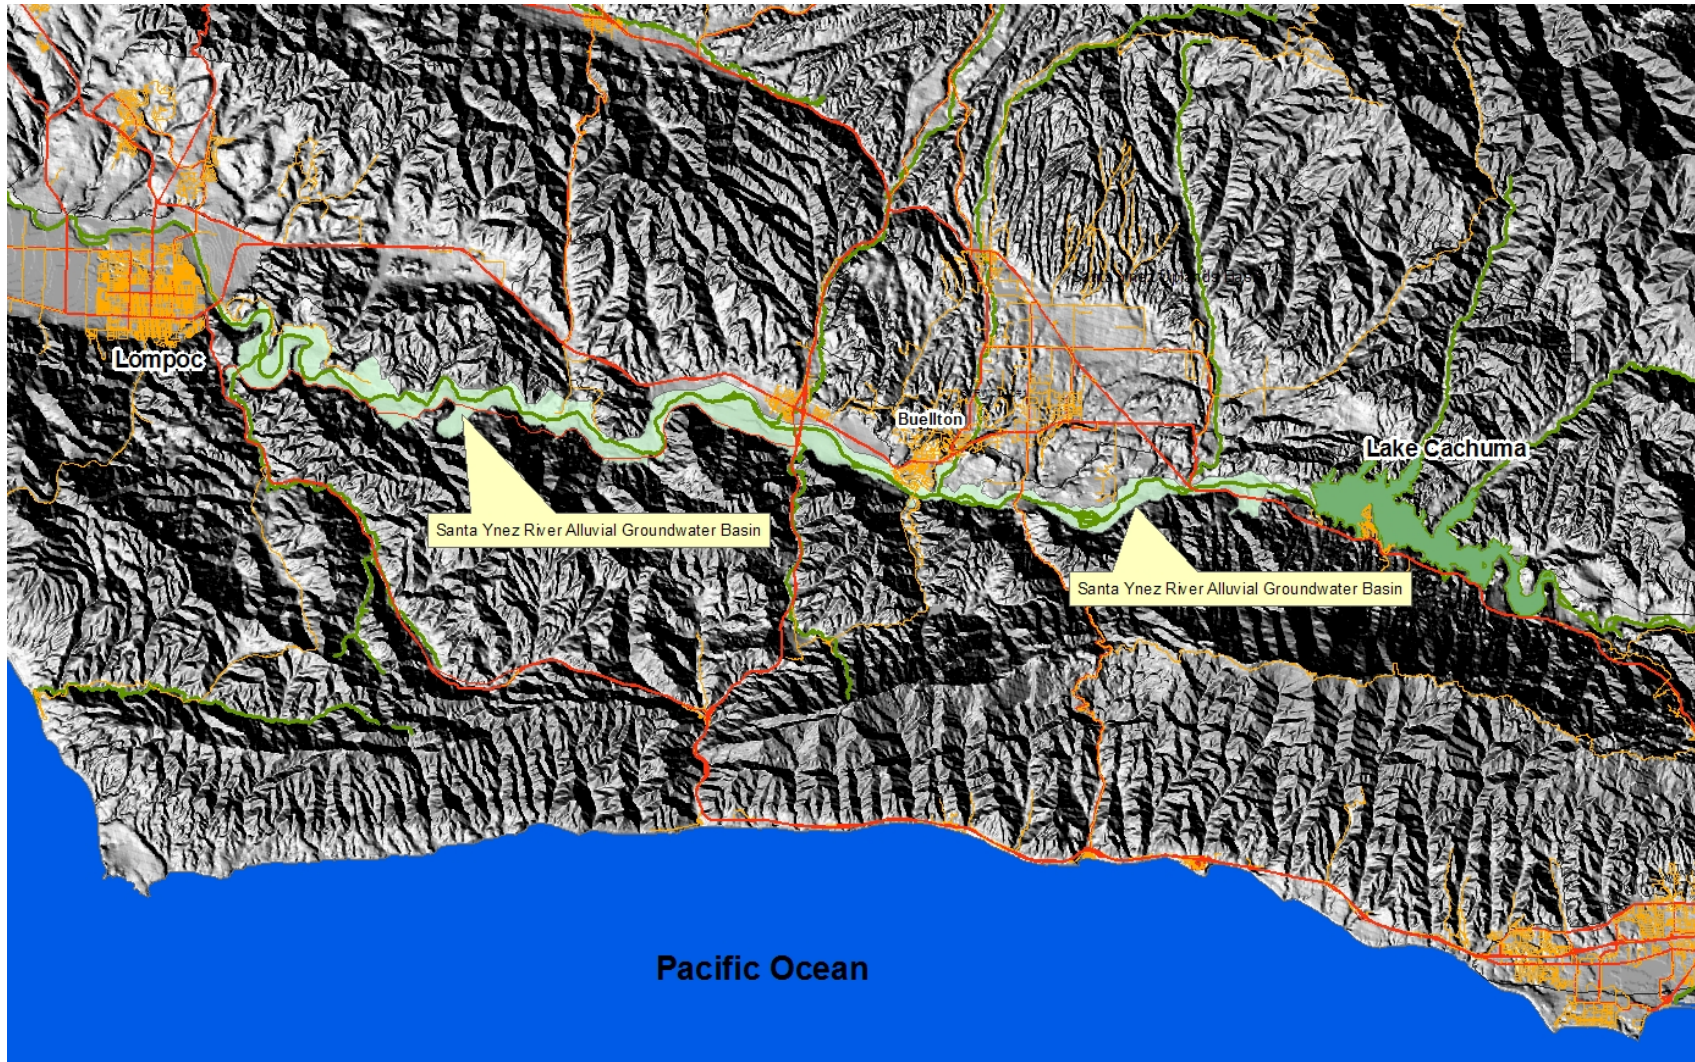


Figure 27: Santa Ynez River Alluvial Groundwater Basin



## Buellton Uplands Groundwater Basin

The Buellton Uplands Groundwater Basin encompasses about 29 square miles located about 18 miles east of the Pacific Ocean and directly north of the Santa Ynez River. The basin boundaries include the impermeable bedrock of the Purisima Hills to the north, the Santa Ynez River Fault to the south, a limited connection to the Santa Ynez Upland Groundwater Basin to the east and a topographic divide with the Lompoc Basin to the west. The Santa Ynez River Riparian Basin sediments overlie portions of the Buellton Uplands in the south-east part of the basin. Due to the north to south hydrologic gradient the Buellton Uplands Basin likely discharges into the Santa Ynez River Riparian Basin (see Santa Ynez River Alluvial Basin section on page 55). SBCWA has estimated average annual rainfall in the basin to be about 17 inches per year. Recharge to the basin is from deep percolation of rainfall, stream seepage, return flow from agriculture, and underflow from adjacent basins.

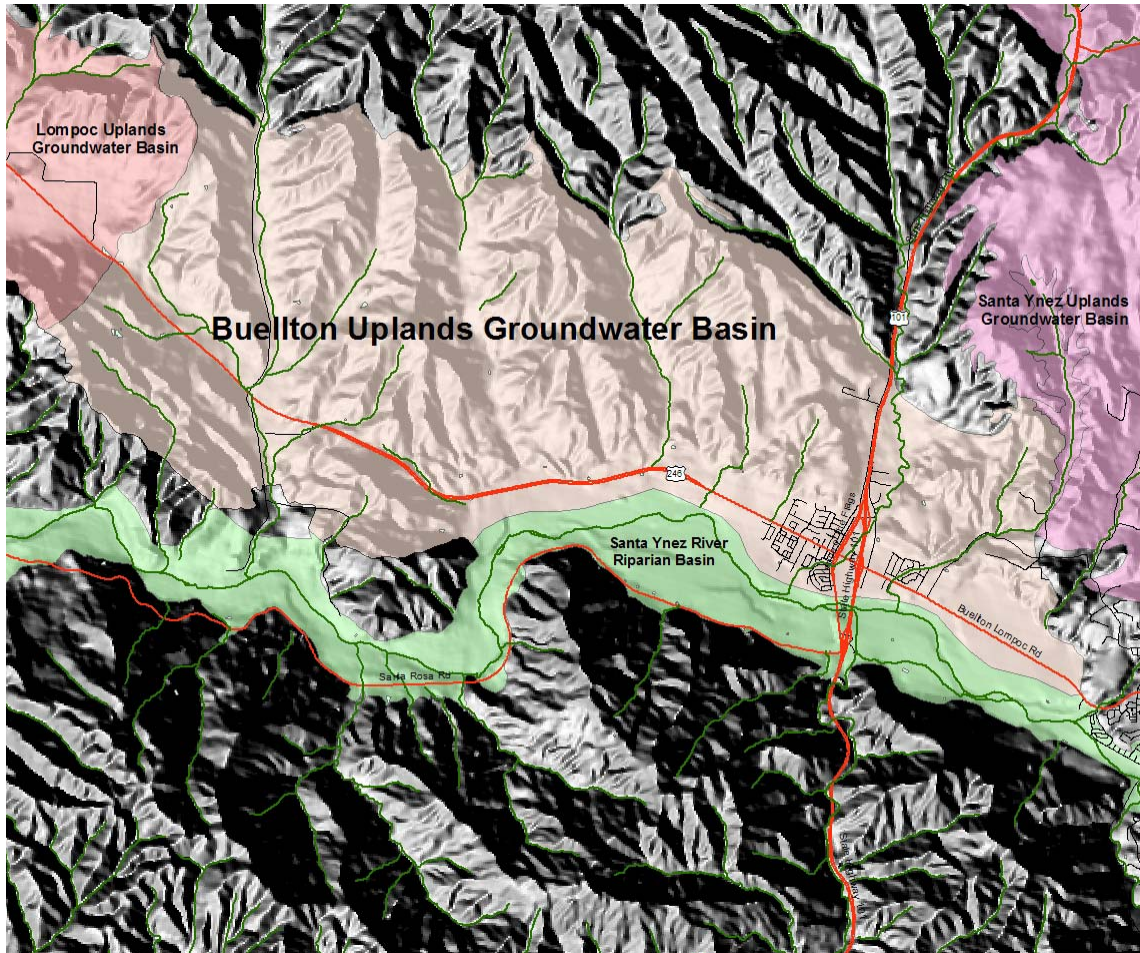


Figure 28: Buellton Uplands Groundwater Basin

### *History and Analyses*

The Buellton Uplands Basin has been a recognized hydrologic unit for decades and is designated on the 1980 groundwater basin maps adopted into the Santa Barbara

County Comprehensive Plan. However, until 1995 this basin was not subject to detailed analysis by either the USGS or SBCWA. At that time SBCWA was commissioned to study the Basin, and the results of that analysis are presented in the following discussion.

Available Storage in the Buellton Uplands Basin is estimated to be 154,000 AF. The total volume of water in storage in this basin is estimated by SBCWA to be about 1.4 million AF (assuming a specific yield of 10%). Safe Yield for consumptive use (Net Yield) is estimated to be 2,768 AFY (SBCWA, 1995). Based on an estimated average of 26% Return Flows, Safe Yield for gross pumpage (Perennial Yield) is estimated to be 3,740 AFY. Estimated pumpage from the basin is 2,599 AFY (gross) and 1,932 AFY (net). Thus, the basin is considered by SBCWA to be in a state of surplus with natural recharge exceeding pumpage by a net of 800 AFY. This surplus represents the amount of groundwater from the Buellton Uplands Basin that discharges annually into the Santa Ynez River Riparian Basin. Approximately 80% of the 2,599 AFY of pumpage in the basin is attributable to agricultural irrigation. The City of Buellton and scattered farmsteads around the rural area use the remaining 20%. The importation of State Water has further reduced the reliance on groundwater.

### ***Water Quality***

Water quality data for the basin is limited. However, data from late 1950s and early 1960s indicate TDS concentrations between 300 and 700 mg/l for several wells within the basin. There is currently no water quality monitoring site operated through the County/United States Geological Survey monitoring program.

### ***2006-2008 Trends***

Rainfall during the period was 14.40 inches, well below the long term average of 17.37 inches. This was mainly due to the extremely dry 2007 water year during which only 6.30 inches of rainfall was recorded.

During the period 2006 through 2008 ground water level was measured at five sites in the Buellton Uplands Basin. Water levels generally fell one to three feet in the basin during the period due to lack of recharge from the near average years of 2006 and 2008 and the extremely dry year of 2007.

## Lompoc Groundwater Basins

The Lompoc Groundwater Basins consist of three hydrologically connected Sub-basins: the Lompoc Plain, Lompoc Terrace, and the Lompoc Uplands. Within the Lompoc Uplands exists the Santa Rita sub-area as a geologic syncline underlying the entire area. Together, these basins encompass about 76 square miles. These basins are best described by Upson and Thomasson, 1951, Wilson, 1955 and 1957, Evanson and Miller, 1963, Evanson and Worts 1966, Miller 1976 and SBCWA, 1977.

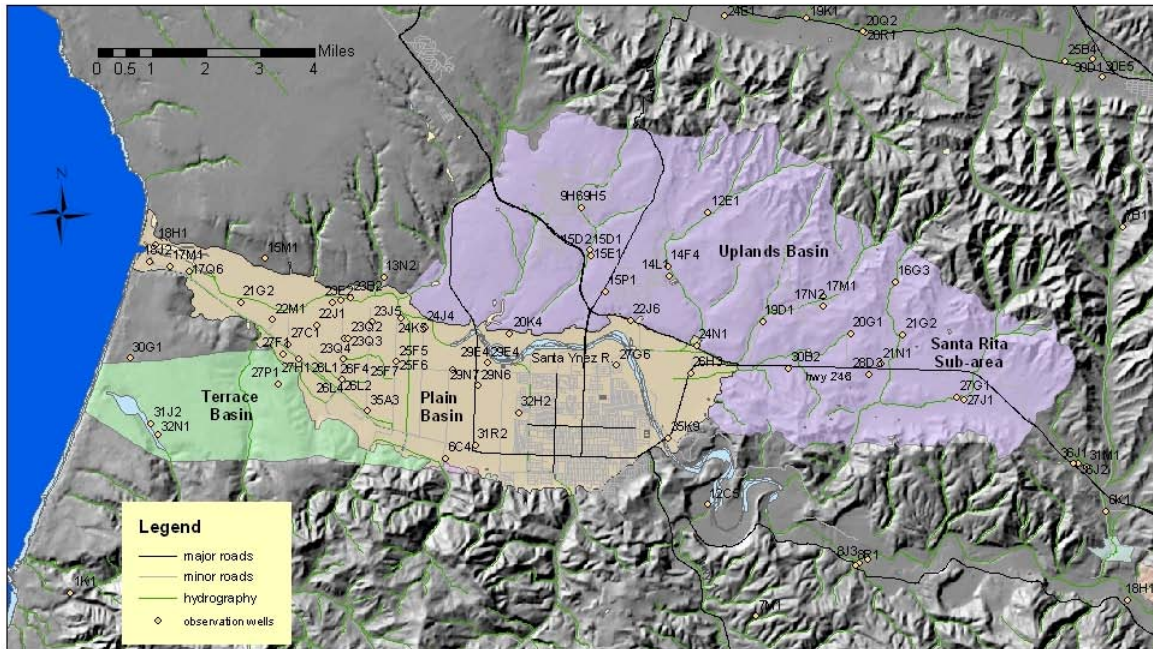


Figure 29: Lompoc Area Groundwater Basins

### Lompoc Plain

The Lompoc Plain Groundwater Basin surrounds the lower reaches of Santa Ynez River and is bordered on the north by the Purisima Hills, on the east by the Santa Rita Hills, on the South by the Lompoc Hills and on west by the Pacific Ocean. This alluvial basin is divided into two aquifers: an upper and a lower zone. The upper zone is sub-divided into three different units: the shallow zone, the middle zone and the main zone. Based on previous hydrologic and water quality studies, these zones have only limited points of hydrologic continuity and exchange. Orographic effects and wind influence precipitation measured within the basin. The maximum average rainfall is about 18 inches and occurs near the southern edge of the basin in the Lompoc Hills; the minimum precipitation is about 10 inches near the Pacific Ocean. Average rainfall near the City of Lompoc is 14 inches. Rainfall averages about 12 inches per year over the entire Lompoc Plain basin. This basin is essentially in equilibrium as during periods of dry climate water is released from Lake Cachuma to recharge groundwater levels in the in eastern portion of the Plain.



### ***Lompoc Terrace***

The Lompoc Terrace Groundwater Basin is formed by a down faulted block capped with permeable sediments (Evenson and Miller, 1963) on south Vandenberg Air Force Base south of the Lompoc Plain. This basin consists of Orcutt Sand deposits which overlay both the Graciosa and Cebada members of the Careaga Formation. The Careaga Formation is a marine formation which can yield small to moderate quantities of water (see Major Water Bearing Geologic Formations of Santa Barbara County, page 25). Rainfall averages 12 inches per year over the basin which has a climate that is heavily influenced by the nearby Pacific Ocean's cool air masses. Thickness of the formation in the Terrace is 400-500 feet and usable groundwater in storage is estimated to be around 30,000 Acre-Feet (SBCWA, 1977). Historically Vandenberg Air Force Base used this basin for water supply but currently relies upon State Water as well as water imported from the San Antonio Groundwater Basin (see page 66).

### ***Lompoc Uplands***

The Lompoc Uplands Groundwater Basin is bordered on the west by the Burton Mesa, on the north by the Purisima Hills, on the east by a topographic divide which separates it from the Buellton Uplands Basin and on the south by the Lompoc Plain Alluvial Basin and the Santa Rita Hills. Historically, underflow from the Lompoc Uplands and Lompoc Terrace contributed to recharge of the Lompoc Plain. As a result of a long-term decline in water levels, little to no underflow now moves from the Lompoc Uplands to the Lompoc Plain.


### ***Analyses***

Available Storage within the Lompoc Groundwater Basins is estimated to be 170,000 Acre-Feet (Santa Barbara County Comprehensive Plan, 1994). Safe Yield is estimated by the Water Agency to be 28,537 AFY (Gross/Perennial Yield) and 21,468 AFY (net). Net pumpage or consumptive use from the Lompoc Basin is estimated to be 22,459 AFY. Based on water level trends evaluated in a 2001 study, the basin is in a state of overdraft with net extractions exceeding recharge by 913 AFY. Most of this overdraft (799 AFY) is derived from the Santa Rita area. The table below reflects the status of each Sub-basin from a 2001 analysis:

Lompoc Uplands Basin	
Santa Rita Area	- 799 AFY
Cebada and Purisima Canyons	- 114 AFY
Mission Hills and Vandenberg Village Areas	+ 7 AFY
Lompoc Plain Basin	- 40 AFY
Lompoc Terrace Basin	+ 33 AFY

**Total -913 AFY**



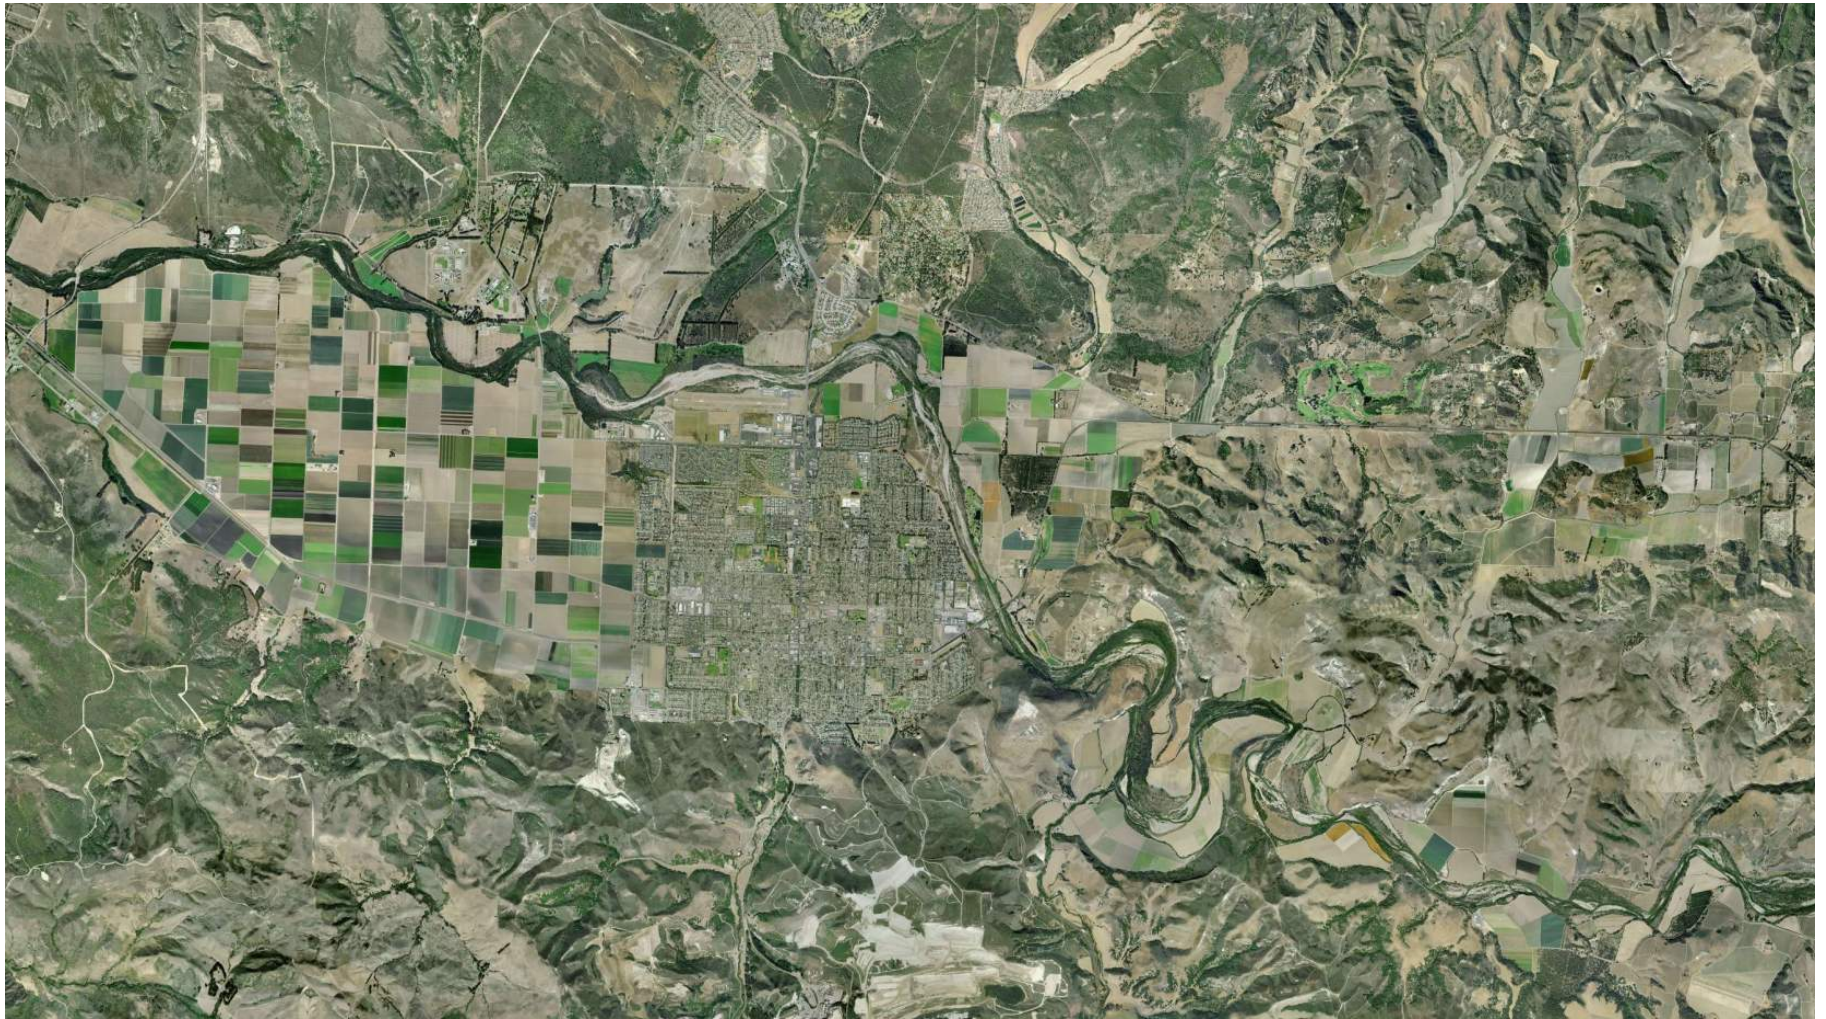

*Figure 30: Aerial image of the Lompoc, Lompoc Uplands and Santa Rita Area taken in August of 2004. The Lompoc Plain Basin is adjacent and west of the urbanized area which is the City of Lompoc. The Lompoc Uplands which provide water to the communities of Vandenberg Village and Mission Hills lies to the north of the City and Lompoc Plain. The Santa Rita area is the easternmost section of the Basin and is hydrologically connected to the other Sub-basins by a geologic syncline the axis of which runs east-west.*



Agriculture uses about 70 percent of the total water consumed within the basin. Municipal users account for the remaining demand and include the City of Lompoc, the Vandenberg Village Community Services District and the Mission Hills Community Services District. The general direction of groundwater flow is from east to west, parallel to the Santa Ynez River. Localized depressions in the water table occur in areas of heavy pumping. One such area is in the northern part of the Lompoc Plain where the City operates municipal supply wells. Pumping depressions are also present in the Mission Hills and Vandenberg Village areas. Sources of recharge to the basin include percolation of rainfall and stream flow (including Cachuma Reservoir releases), agricultural water return flow and underflow into the basin.

The Santa Ynez River Water Conservation District and the City of Lompoc have entered into an agreement with the Cachuma Member Units which addresses a number of



Figure 31: Typical mixture of Agriculture in the Lompoc Plain Groundwater Basin

concerns relating to the operation of Cachuma Reservoir, including protection of water quality in the Lompoc Plain. This agreement incorporates existing plans and water rights decisions and also provides flexibility to improve management procedures as warranted. The parties to the agreement have asked the State Water Resources Control Board to incorporate technical changes to existing water rights decisions but to leave the existing water management structure otherwise intact.

## Water Quality

Water quality in the Lompoc Plain varies significantly both geographically and throughout the different zones of the upper and lower aquifer. For a detailed discussion on water quality throughout the Lompoc Groundwater Basins please consult USGS WRI 91-4172 "Ground-water Hydrology and Quality in the Lompoc Area, Santa Barbara County California, 1987-88" (Bright et al., 1992). The following discussion provides only a summary of water quality conditions in the Lompoc Groundwater Basins.

Groundwater quality in the Lompoc Basin generally decreases from east to west as the basin nears the coastline of the Pacific Ocean. Areas of recharge in some portions of the Eastern Lompoc Plain adjacent to the Santa Ynez River contain total dissolved solids (TDS) concentrations greater than 1,000 mg/l. It is believed that leakage from the shallow zone is responsible for elevated TDS levels in the middle zone in the northeastern plain. Figure 32 below illustrates and sulfate trends over the past 45 years at State Well 7N/34W-27P5 which is located on the northern flank of the City of Lompoc in the northeastern section of the Plain. Sulfates have generally ranged between 400 and 600 mg/L and dissolved solids have generally ranged between 1000 and 1500 mg/L over the past 40 years. Point sources of sulfates and nitrates include sewage treatment plants, industrial discharges and agricultural Return Flows. Sulfates are not considered toxic to plants or animals at normal concentrations. In humans, concentrations of 500 - 750 mg/L cause a temporary laxative effect. Problems caused by sulfates are most often related to their ability to form strong acids which can change the pH characteristics of the water body.

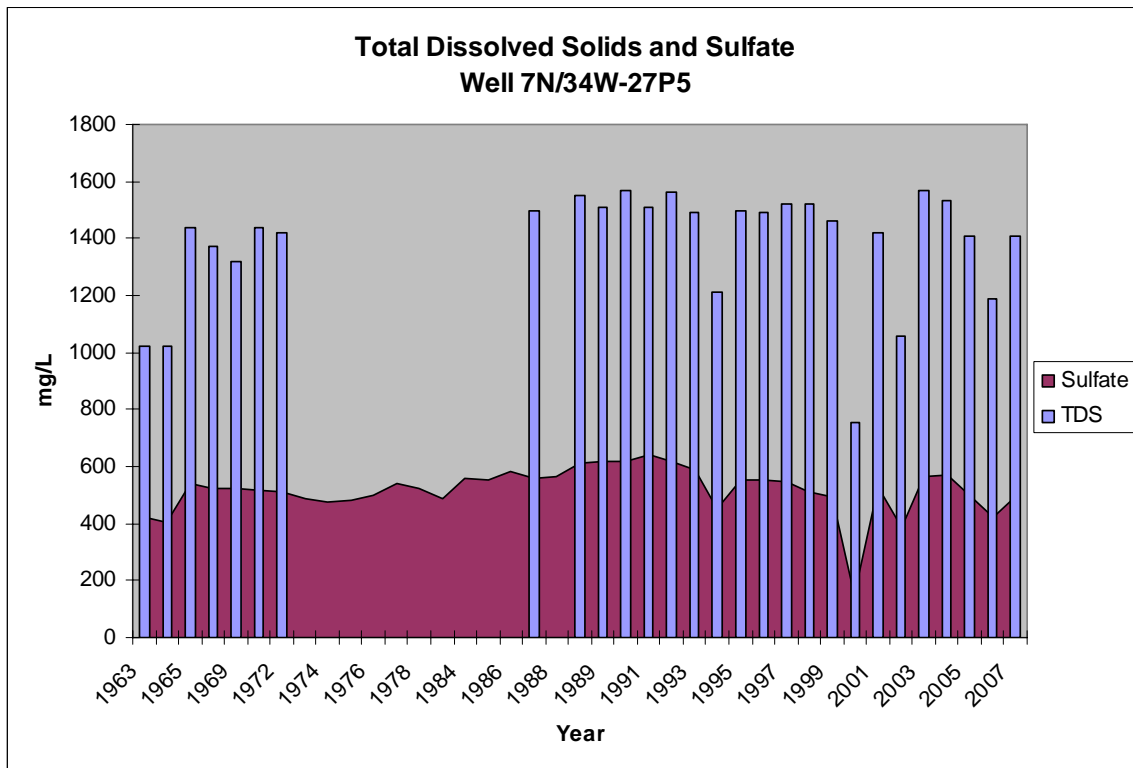


Figure 32: TDS and Sulfate for State Well 7N/34W-27P5

In the middle zone, water samples taken from below agricultural areas of the north-eastern plain contained TDS concentrations averaging over 2,000 mg/l. However, some middle zone portion of the upper aquifer groundwater from the western plain exhibited TDS levels below 700 mg/l.

Upon crossing into Section 35 West in the far western section of the Lompoc Plain water quality changes dramatically. In this area near the coast groundwater from the main zone exhibited TDS concentrations as high as 4,500 mg/l. Water quality in the shallow zone of the Lompoc Plain tends to be poorest near the coast and in some heavily irrigated areas of the Sub-basin. TDS concentrations of up to 8,000 mg/l near the coast were measured in the late 1980s. Contamination of the main zone near the coast is thought to be due to percolation of seawater through estuary lands and upward migration of poor quality connate waters from the underlying rock. The presence of elevated boron, a constituent common in seawater supports this conclusion.

Groundwater of the Lompoc Terrace and Lompoc Upland Sub-basins is generally of better quality than that of the plain, with TDS averaging around 700 mg/l. Some of the natural seepage from these Sub-basins is of excellent quality. Figure 33 below of TDS from well 7N/34W-15E1 is in the Lompoc Uplands and illustrates the significantly better quality of water in the Lompoc Uplands. This is a production well operated by Vandenberg Village Community Services District.

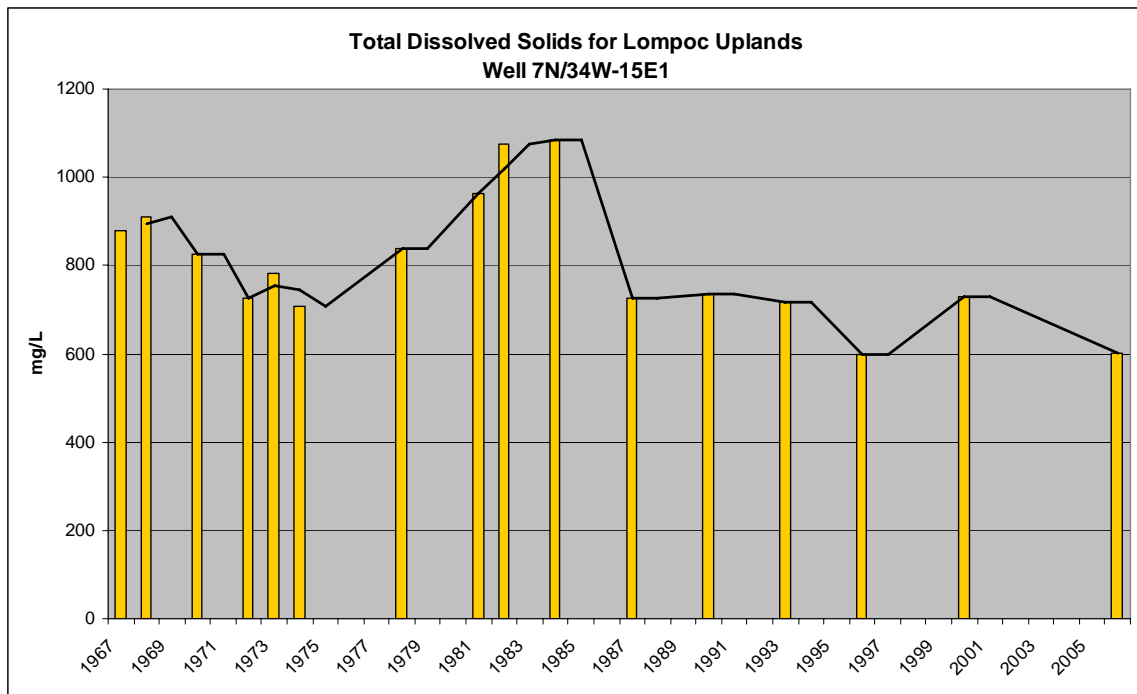


Figure 33: TDS for State Well 7N/34W-15E1

Groundwater users and public agencies within the basin are working to clarify and resolve water quality concerns due to reduction in fresh water recharge from the Santa Ynez River after the construction of Cachuma Reservoir and the gradual increase in agricultural Return Flows. Public agencies are also exploring options for exercising SWRCB Permit 17447 to divert winter flows from the Santa Ynez River into spreading basins that would serve to recharge the Lompoc Plain and Lompoc Uplands Sub-basins.

### ***2006-2008 Trends***

Rainfall during the period was below average with a three year average of 11.91 inches versus the long term average of 15.13 inches at the Lompoc Airport. This was mainly due to the extremely dry 2006-2007 water year in which only 5.31 inches of rainfall was recorded.

During 2006-2008 water quality was measured at four sites throughout the basin and water level was measured at 68 sites. In addition, the Santa Ynez River Water Conservation District coordinates both water level and water quality measurements at 16 sites in the Lompoc Plain Basin funded by local water purveyors and the County as part of the ongoing monitoring in relation to operations of Lake Cachuma. There was no significant change in water quality during the 2006-2008 time period. As previously mentioned, water level is balanced by releases made from Lake Cachuma.



# San Antonio Groundwater Basin

## Physical Description

The San Antonio Valley is approximately 30 miles long by seven miles wide. It is cradled between the Solomon-Casmalia Hills to the north, the Purisima Hills to the south, the Burton Mesa to the west and the westernmost flank of the San Rafael Mountains to the east. The Watershed is approximately 130 square miles and the Groundwater Basin within the Valley is about 110 square miles. Average annual rainfall within the basin is about 15 inches.

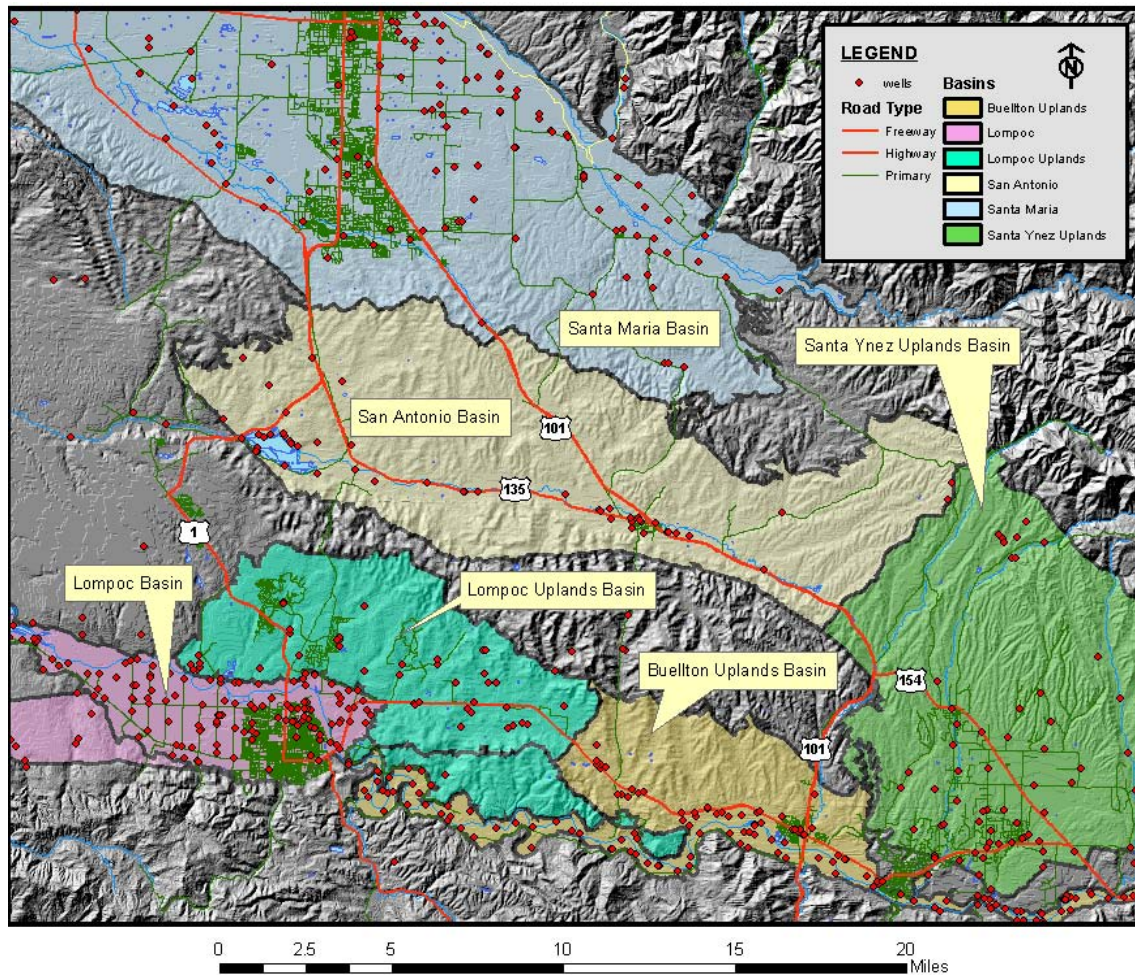


Figure 34: San Antonio Groundwater Basin

The valley is shaped by an eastward plunging syncline containing the deposits comprising the groundwater basin. The Paso Robles formation and alluvium are the most common material within the groundwater basin. Consolidated rocks lie below the basin deposits but surface about seven miles east of the Pacific Ocean, forcing groundwater to the surface, and creating a wetland area known as Barka Slough which denotes the western end of the Groundwater Basin. Land use within the Valley consists



mainly of agriculture, ranching and a small amount of urban development in the town of Los Alamos.

### ***History and Analyses***

The basin is best described by Muir (1964), Santa Barbara County Water Agency (1977), and Hutchinson (1980). Arnold and Anderson (1907) were the first to describe in detail the geography and geology of the San Antonio Valley for the purposes of petroleum exploration.

What is now the town of Los Alamos was surveyed in 1876 and one year later became a flourishing community having a hotel, three saloons, and several general merchandising stores. Rapid growth of the town brought about the demand for a dependable water supply, and, as a consequence, the first domestic water wells in the Valley were dug. Before this time the water had been obtained from springs that bordered the Valley. The pumping of water for irrigation started at the turn of the century with the beginning of the sugar-beet industry. By 1943 there were 21 active irrigation wells in the Valley, and by 1958 that number had increased to 39 (Muir, 1964). Similar to the Santa Maria Valley, irrigation developed slowly between 1900 and 1920, rapidly between 1920 and 1930, and then slowed between 1930 and 1943 (Worts, 1951).

Appraisals of the hydrologic resources of the area began in 1942 with work by G.F. Worts. Worts canvassed the wells and mapped the geology of the area but his work was suspended in 1943 and picked up again in 1957 by Muir. In addition, H.D. Wilson and R.E. Evanson were integral in developing baseline hydrologic conditions.

Safe Yield of the basin was reported to be 8,667 AFY (gross) and 6,500 AFY (net) (USGS Open File Report, 1980). Available Storage in the upper 200 feet of the basin is estimated to be about 800,000 AF. The supply/demand status of this basin was updated in a 1999 study (Baca et al) prepared by the County. The 1999 County study estimated net pumpage (net consumptive use) of groundwater in the basin to be 15,931 AFY (equivalent to gross pumpage of 21,128 AFY). Thus, the basin was considered to be in a state of overdraft at a level of 9,431 AFY (net).

In 2002 the Cachuma Resource Conservation District (CRCD) undertook the task of updating the land use survey for the watershed in preparation for the release of the San Antonio Creek Coordinated Resource Management Plan (May, 2003). The basin supply/demand status was re-evaluated in 2003 by SBCWA due to the presence of this updated land use survey, pumping pattern changes and to update recharge numbers based on long-term climate. It was found that pumping of the basin had increased but also that the recharge and thus Safe Yield numbers had been underestimated so that the average annual overdraft is still around 9,500 AFY (see Table 5, San Antonio Hydrologic Budget on page 70).

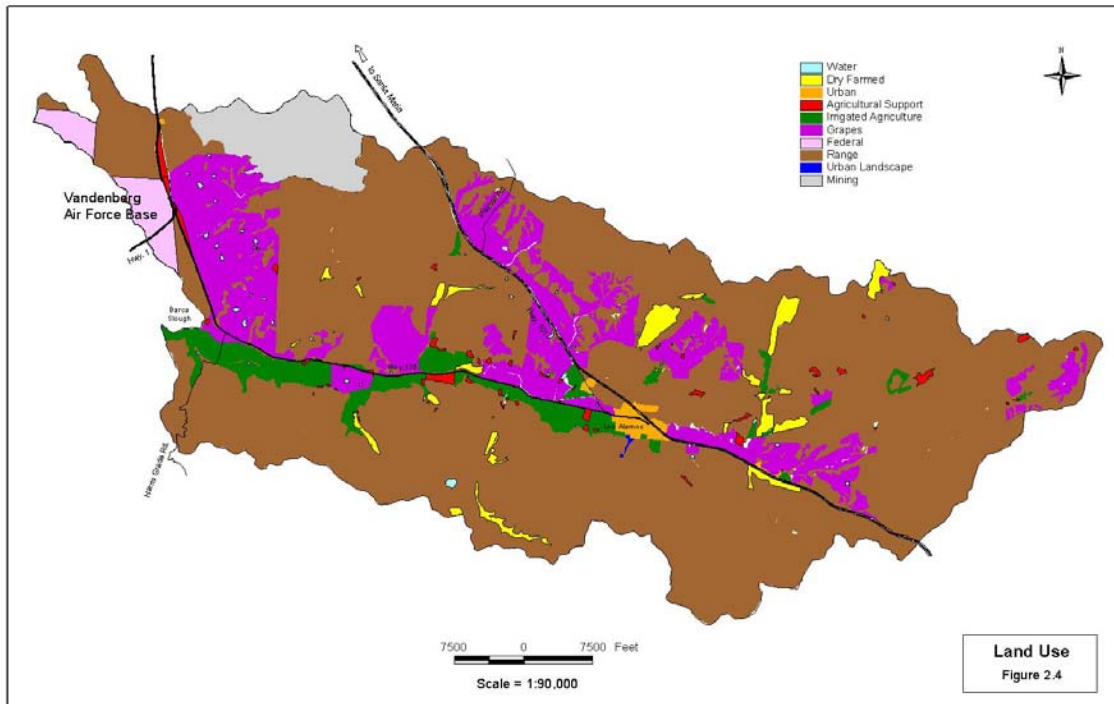


Figure 35: San Antonio Valley Land Use Courtesy of the Cachuma Resource Conservation District

### ***San Antonio Valley Land Use***

The CRCD used aerial imagery ground checked by staff to ascertain that 9,970 acres of vineyards and 2,800 acres of annual or vegetable crops were being grown in the basin. In addition it was determined that 1,381 acres of dry farming without supplemental irrigation existed in the basin. Figure 35 above illustrates the distribution of land use throughout the Valley.

Based on these irrigated acreages and water duty factors supplied by UC Cooperative Extension the gross pumpage is estimated to be 25,540 AFY (net pumpage is estimated to be 20,432 after Return Flows of 20% are deducted).

Vandenberg AFB historically pumped approximately 3,400 AFY from the San Antonio Basin. With the recent shift to State Water as its principal supply, VAFB pumpage has dropped to about 300 AFY.

Recent analysis shows that the basin was previously evaluated during a dry period (1958-1977) and thus both deep percolation from rainfall and stream seepage are believed to have been previously underestimated. The trends during this period are depicted on the Cumulative Departure from Mean chart as Figure 36 on the following page.

These types of charts help show wet and dry trends and help indicate base periods that should be used when evaluating basin conditions. The mean or zero line is the thick (pink in color version) in the middle of the chart. The jagged or abrupt line is the cumulative departure from mean; when descending it indicates a dry period and when rising it represents a wet trend. Note how in the previous evaluation period used to calculate Safe Yield (1958-1977) the trend is downward, dry, and in the last 25 years the

cumulative departure has climbed back up to almost mean. This means that the area was drier than normal from around 1950 to around 1975 and has been wetter than normal between around 1975 to around 2000. This trend correlates well with global studies being conducted at the University of Washington on the Pacific Decadal Oscillation (PDO) <http://ceses.washington.edu/cig/pnwc/aboutpdo.shtml>.

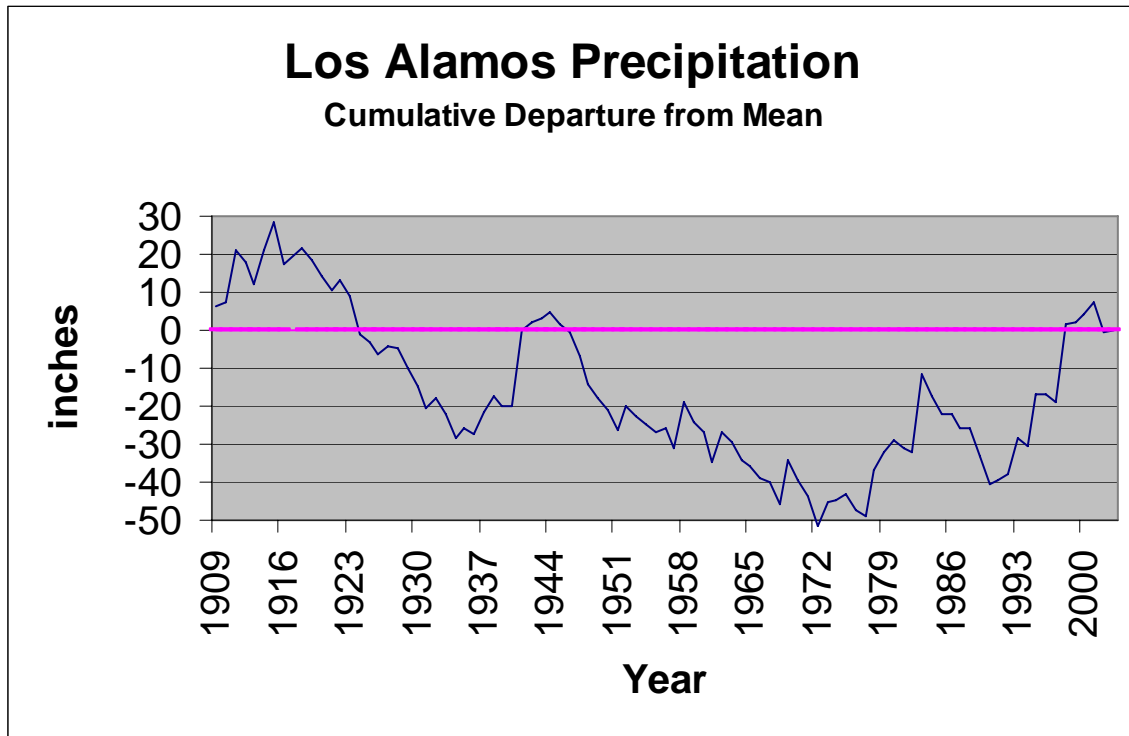


Figure 36: Los Alamos Cumulative Departure from Mean

Using the climatically balanced base period of 1943-2001 for evaluating the basin, SBCWA arrived at about 10,000 AFY for deep percolation of rainfall using methodology after Blaney, 1963 and Ahlroth, 2002 that calculates deep percolation from rainfall. Stream seepage estimates have varied between 2,000- 5,000 AFY. 5,000 AFY is more reasonable taking into account the wetter base period and lowered groundwater levels. This means the Safe Yield of the basin is actually about 15,000 AFY. Table 5 on the following page lists the calculated inputs and outputs of the San Antonio groundwater basin.

Groundwater is the sole source of water supply within the basin boundaries, there are no surface diversions and there are no deliveries of State Water to the basin. The Vandenberg Air Force Base (VAFB) boundary stretches into the westernmost portion of the Basin and occasionally uses groundwater for Base operations as a backup to State Water Project supplies and for blending purposes. VAFB's water is actually exported out of the Los Alamos basin to the Lompoc Terrace and Lompoc Uplands areas.

Water discharges from the basin through well extractions and surface outflow to the Pacific Ocean. The surface outflow at the western end of the basin supports the Barka Slough wetland. As previously stated, the basin is in overdraft at an estimated level of around 9,500 AFY. This may lead to adverse effects over the long term in either supply

or water quality. Overdraft will also result in a gradual progressive reduction in the amount of water discharged on an average annual basis from the basin. Thus, the Barka Slough wetland may progressively diminish.

### San Antonio Basin Hydrologic Budget

Outputs from San Antonio Groundwater Basin	2003 Analysis	1999 Analysis
1. Los Alamos Community Service District	-270	-188
2. Other domestic usage throughout the basin	-170	
<b>3. Agricultural extractions</b>	<b>-20,000<sup>1</sup></b>	-11,843
<b>4. Vandenberg Air Force Base</b>	<b>-300</b>	-3400
5. Baseflow out of Basin	-800	
6. Evapotranspiration of Phreatophytes in Barka Slough and along San Antonio Creek	-3000	
Sub total	-24,540	-15,431
Inputs from San Antonio Groundwater Basin		
1. Underflow into Basin	0	0
<b>2. Deep Percolation from Rainfall</b>	10,000	
<b>3. Stream Seepage</b>	5,000	
Sub total	<b>+15,000</b>	<b>+6,500<sup>2</sup></b>
Totals	-9,540	-9,431

All amounts expressed as Acre Feet per Year (AFY)

<sup>1</sup>Using a 20% return flow value; the 1999 analysis used 25%

<sup>2</sup>From USGS open file report, 1980

Table 5: San Antonio Basin Hydrologic Budget

### Water Quality

Water quality studies conducted by the USGS in the late 1970s indicated an average TDS concentration within the basin of 710 mg/l, with concentrations generally increasing westward toward the ocean along the Valley floor. Tributary canyons such as Howard, Canada de las Flores and Harris generally have much better quality water with TDS on the order of 300-600 mg/l. The cause of the westward water quality degradation has been thought to be the accumulation of lower quality water from agricultural return flow and the dissolution of soluble minerals (Hutchinson, 1980). The highest TDS concentration (3,780 mg/l) was found in the extreme western end of the Valley and westward of the Barka Slough; the lowest concentration (263 mg/l) was found at the extreme eastern end. Analyses compiled for samples taken between 1958 and 1978 indicate that groundwater quality remained fairly stable during that period. Analyses of water sampled in 1993 for several wells show only slight increases since the previous study. There is evidence that poor quality connate waters exist within fracture zones of the bedrock and that this water might be induced into overlying strata, especially west of Barka Slough. There is no evidence of seawater intrusion in the basin, nor is the basin considered susceptible to seawater intrusion due to the consolidated rock that separates the basin from the ocean. Figure 37 on the following page indicates the current surface and groundwater quality monitoring locations in the San Antonio Groundwater Basin.

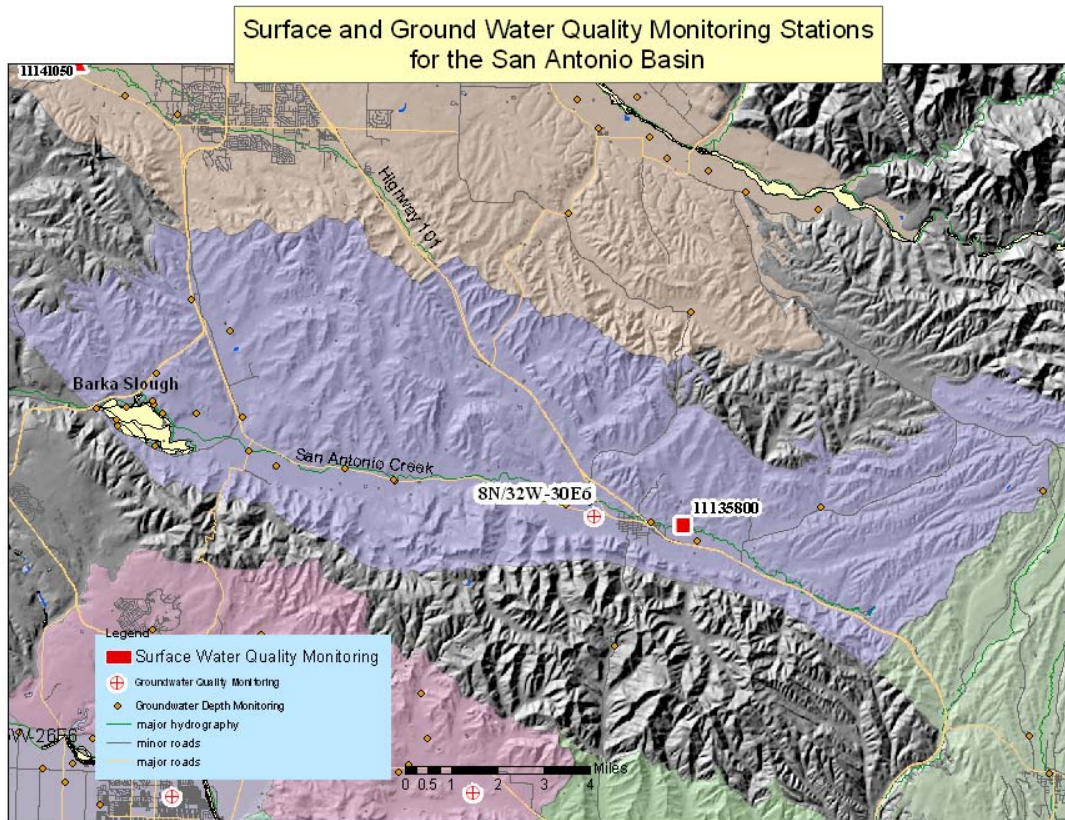


Figure 37: Locations of Water Quality and Streamflow Monitoring in the San Antonio Basin

### Depth and Screen/Perforation Information For Groundwater Quality Monitoring Sites

<u>State Well ID</u>	<u>USGS Number</u>	<u>Depth</u>	<u>Screen Intervals</u>
8N/32W-30E6	344442120173201	600'	300'-600'

### Description of Surface Water Quality Monitoring Sites

<u>Station Number</u>	<u>Description</u>	<u>Watershed Size</u>
11135800	San Antonio Creek at Los Alamos	34.9 sq. mi.

### 2006-2008 Trends

Rainfall during the period was slightly below average with an average for the three year period of 13.87 inches versus a long term average of 15.31 inches. This was mainly due to the extremely dry 2007 water year during which only 6.29 inches of rainfall was recorded. Los Alamos Fire Station has maintained one of the most reliable rainfall records in the County since 1909.

During the period 2006 through 2008 ground water quality was measured at one site in the basin and water level was monitored at 21 sites. The water quality site was initiated in 2003. There was little change in total dissolved solids, calcium, magnesium, nitrates and sulfates during the 2006-2008 timeframe. Figure 38 below depicts this and all indicators are that the water quality in this area has not been degraded over the past few years and is well within both agricultural and domestic usage standards.

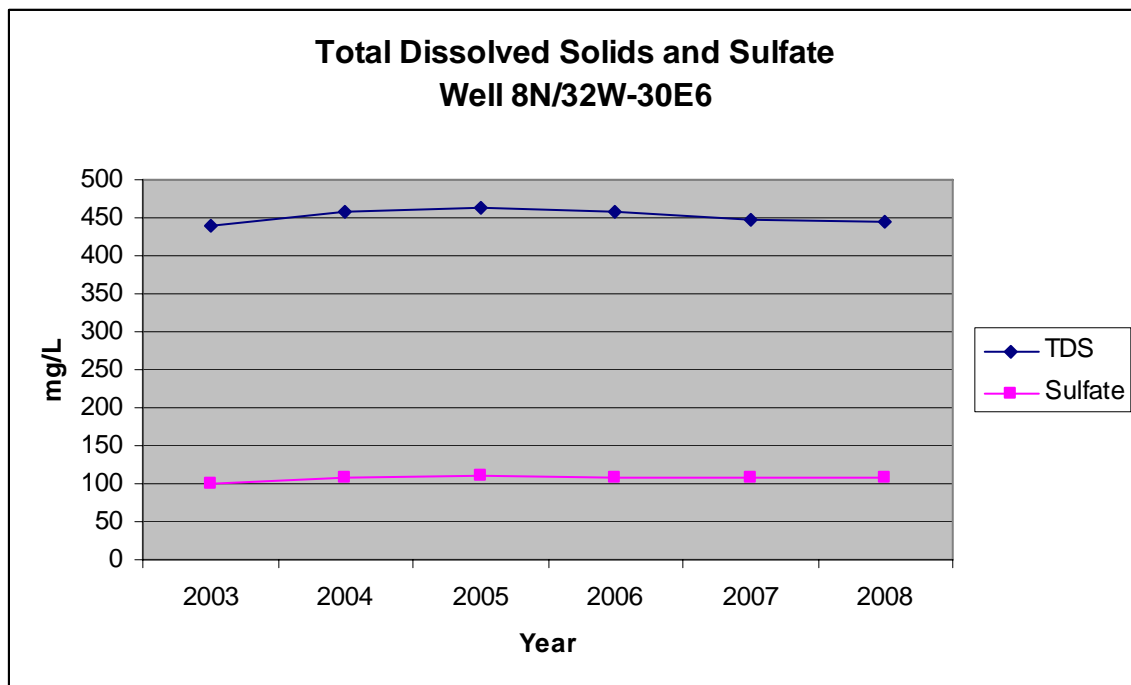


Figure 38: TDS and Sulfate for State Well 8N/32W-30E6

As previously mentioned water level data was collected at 21 sites throughout the San Antonio Basin during the 2006-2008 period. General trends are as follows: in the far eastern part of the basin in the uplands area there appears to be no substantial change as well as in the far western part of the basin near the Barka Slough. However, in the north central part of the basin where vineyard development has been increasing there were significant declines in 2006, recovery in 2007 and again declines in 2008 after the extremely dry 2007. It is very likely that the recovery in 2007 was a result of the above average rainfall of 2005 two years earlier. Unfortunately there is no long term trend that can be analyzed at this time as these wells were added to the monitoring program around 2003 when concern about water usage in the San Antonio Basin due to increased irrigated acreage began. SBCWA will continue to closely monitor the San Antonio Groundwater Basin and discuss any significant water level or quality changes in future groundwater reports.



# **Santa Maria Groundwater Basin**

## ***Physical Description***

The Santa Maria Groundwater Basin Main Unit is a 170 square mile alluvial basin that is bordered by the Nipomo Mesa and Sierra Madre Foothills to the north, the San Rafael Mountains to the east, the Solomon-Casmalia Hills to the south and the Pacific Ocean to the west (See Santa Maria Groundwater Basin Maps, pages 74 and 85). The Basin is situated in the northwest portion of Santa Barbara County and extends into the southwest portion of San Luis Obispo County. The Valley is approximately 28 miles long and 12 miles wide. Average rainfall varies from about 12 to 16 inches per year within the basin. Surface drainage is primarily from the Sisquoc and Santa Maria Rivers that traverse the north side of the basin from east to west. Orcutt Creek, Bradley Canyon, Cat Canyon and Foxen Canyon are the primary drainages on the south side of the basin. Near the coast west of Bonita School Road, the aquifer is confined under silt and clay, composing the upper part of the alluvium; the remaining part of the basin east of Bonita School Road is considered to be unconfined. Depression of the water table occurs in areas of heavy pumping.

The Santa Maria Groundwater Basin has three distinguishable units that appear to have only limited interaction: the Main Basin Unit, the Nipomo Mesa Unit, and the Arroyo Grande Unit. In previous reports and analyses by SBCWA only the Main Basin Unit has been addressed. The Nipomo Mesa and Arroyo Grande Units are completely within San Luis Obispo County. The Nipomo Mesa consists of older dune sands and alluvial deposits resting atop the Paso Robles formation that thins north of the Santa Maria River and the Santa Maria Main Basin Unit. The Arroyo Grande Unit consists of well-sorted alluvial deposits resting atop a thin veneer of the Paso Robles formation, terminating in the five cities area in San Luis Obispo County. The California Department of Water Resources (DWR) released [Water Resources of the Arroyo Grande – Nipomo Mesa Area](#) in 2003 which focuses on the Arroyo Grande, Nipomo Mesa and Valley, and Oso Flaco areas. The report concludes that no overdraft currently exists in the areas of the study using a climatic base period of 1984-1995.

**The following sections pertain to only the Santa Maria Main Basin in Santa Barbara County and the Oso Flaco area in the southwest corner of San Luis Obispo County.**

## ***History and Analyses***

The Basin is best described by Worts (1951), Miller and Evanson (1966) and SBCWA (1977, 1994). As one of the largest agricultural and historically important oil producing coastal valleys of California, this basin has been studied extensively. Modern exploration began in 1888 when the area's geological features were mapped by the State mineralogist in conjunction with the University of California Geology Program and the USGS. Beginning in 1903 the area grew rapidly in response to oil development, and in 1907 the first comprehensive report on the area was published. USGS Bulletin 322 focused mainly on the basin geology and included some mention of water resources. Water resources examined in that particular report were limited to water diversions from surface runoff of winter and springtime river flows and perennial springs, and from

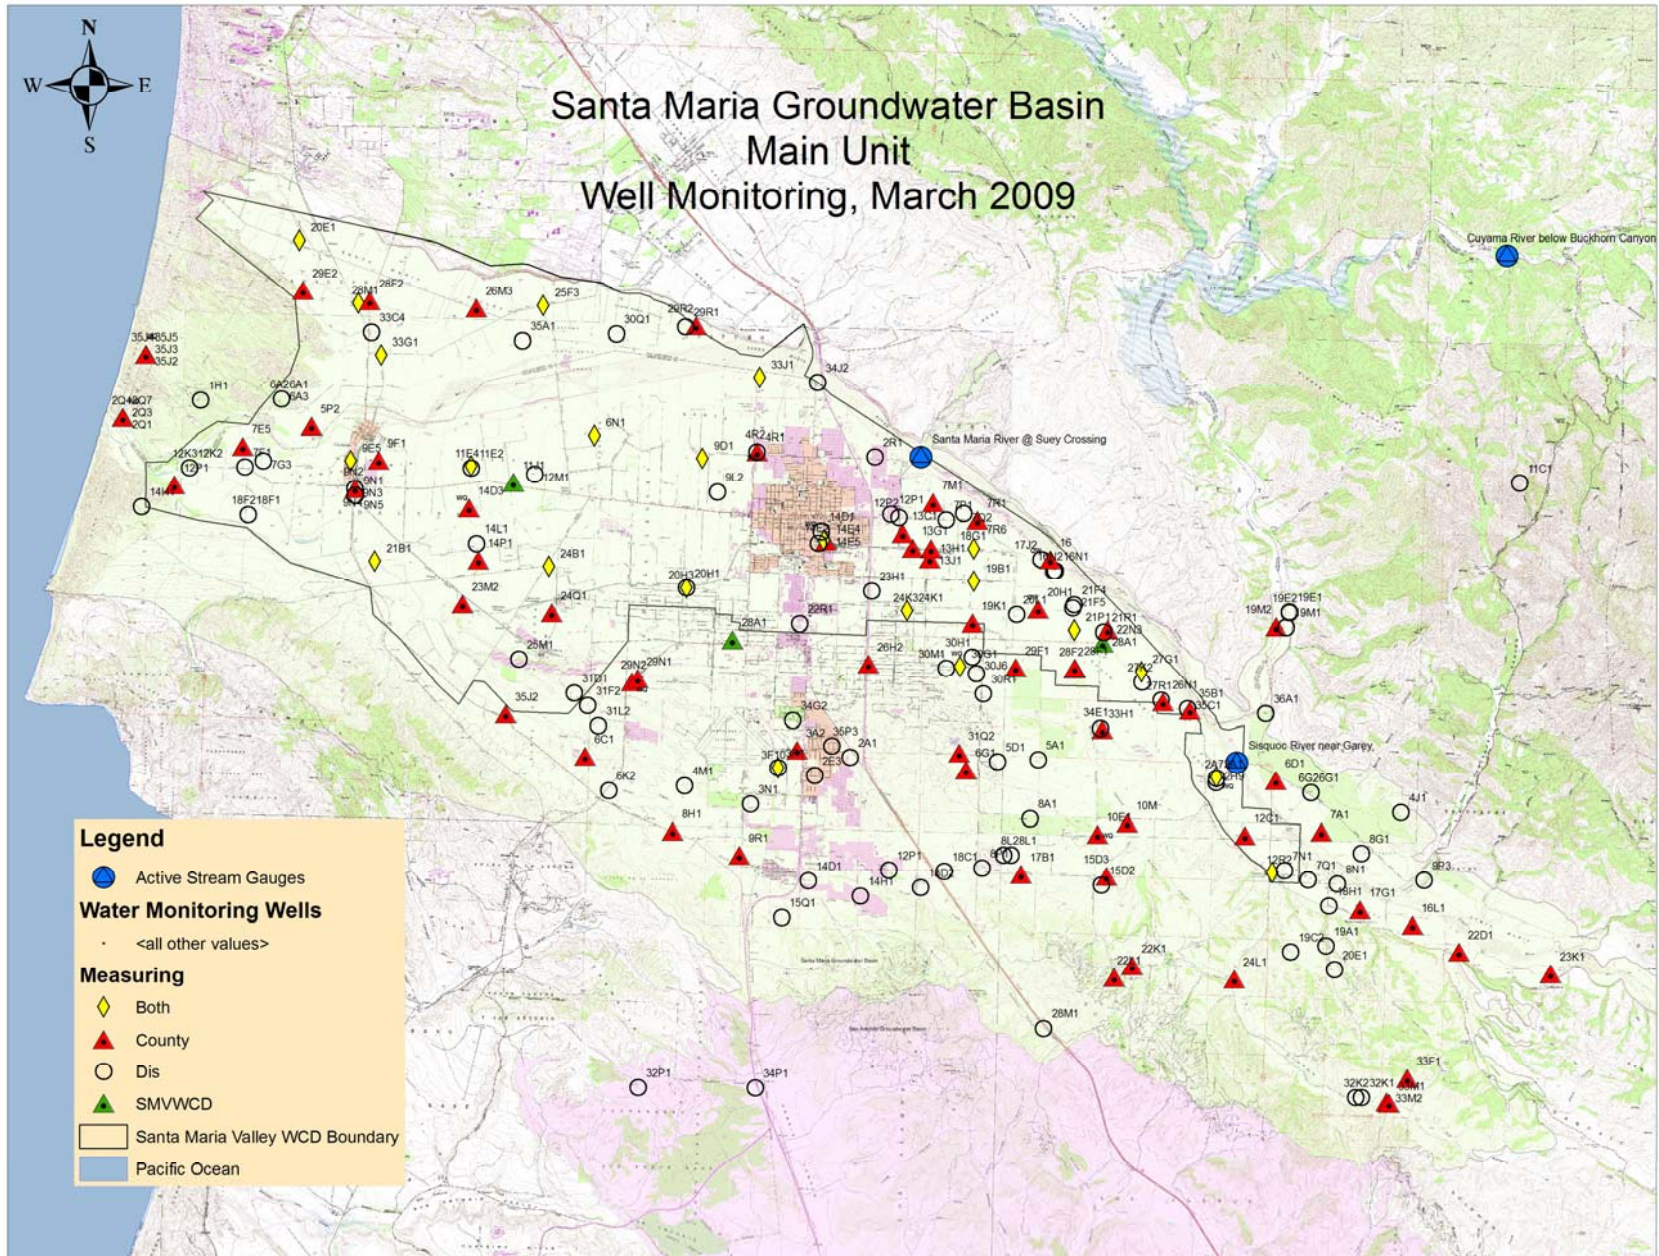


Figure 39: Distribution of Groundwater Monitoring Sites in the Santa Maria Valley

artesian wells in the western part of the basin as groundwater pumping had yet to be developed. Examination of the basin continued to be focused mainly on oil until 1931 when Lippincott established baseline hydrologic conditions for consideration of federal and state funding toward flood control and water conservation projects.

In 1946 USGS Bulletin 222 concluded that a 12,000 AF annual overdraft existed within the basin. The period of the most comprehensive evaluation of the basin began in 1947 and continued until 1966 with work by Worts, Miller and Evanson. Using data from this period, the Perennial Yield of the basin was determined to be 70,000 AF (revised from 57,000 AF) and the annual overdraft to be about 20,000 AFY. In 1976 the Toups Corporation was hired by the City of Santa Maria to perform a thorough Water Resources study of the basin. This report concluded that in 1976 the average annual overdraft of the basin was 6,000 AF and projected to be 25,000 AF by the year 2025 without the procurement of additional water sources. The USGS completed a report in 1976 (USGS WRI 76-128) focusing on the water quality of the basin, specifically in regard to increasing nitrogen levels. This report listed the calculated average annual overdraft to be 10,000 AF.

Using updated data and climate trends, a 1977 SBCWA comprehensive report of the basin determined an average annual overdraft of 20,000 AF and projected it to grow to 30,000 AF by the year 2000. In 1985 the USGS produced report 85-4129 which focused on recharge of the basin. In 1991 the Water Agency with the help of Boyle Engineering produced the report "Santa Barbara County Growth Inducement Potential of State Water Importation" which considered the growth inducement potential at the water purveyor level. The report serves as an analysis of 1990 water supply conditions as well as a projection for the 21<sup>st</sup> century. This report calculated the annual average overdraft to be about 37,000 AF in 1990 without State Water and about 15,700 AF in the year 2000 with the implementation of State Water. In 1994 the Water Agency assembled the "Santa Maria Valley Water Resources Report" which updated and organized information from previous reports and studies of the basin. This report presented no new information but provided a comprehensive overview of water resources and served as a precursor to a water management plan for the basin.

In 1997 the Santa Maria Valley Water Conservation District (SMVWCD) hired Luhdorff and Scalmanini Engineers to do a report entitled "Special Assessments of Groundwater Management". The 1996 voter approved proposition 218, required such a report before new assessments could be levied on property owners. This report stated that the hydrologic conditions of the basin imply a long-term stability comprised of periodic groundwater level declines and recoveries, as opposed to an average annual overdraft. Luhdorff and Scalmanini were again hired by the SMVWCD to expand their investigation of the basin and in March 2000 they released a report utilizing a numerical flow model to establish an up-to-date Perennial Yield of the basin based on the most recent recharge and discharge conditions. This report concluded that the basin was essentially in balance, relying on a base study period of 1968 to 1989.





Figure 40: Santa Maria Agriculture and Petroleum Operations in the central part of the Basin

In 2001 SBCWA was commissioned by the Santa Barbara County Administrators Office to update the 1991 “Santa Barbara County Growth Inducement Potential of State Water Importation” report as part of the strategic scan of resources the County was developing (the title of this report is “Santa Barbara County Water Supply and Demand Comparisons 2002 Update”). Analyses generated for this report show that a 2,368 AF groundwater overdraft existed (Ahloth, 2002) and under current trends of usage and climate a slightly higher overdraft will exist by 2020. The reduction in overdraft from previous SBCWA analyses is mainly due to State Water importation. This analysis is a model result quantifying all inputs and outputs from the basin and using a 1943-1999 base period. The results of this modeling effort are supported by water level readings made throughout the basin by the County and USGS.

In order to resolve the conflicting conclusions of historic studies and reports, the SBCWA hired Hopkins Groundwater Consultants Inc. to perform an independent evaluation of the methodologies and conclusions of SBCWA’s work. Hopkins concluded that the overdraft is indeed somewhere between 2,000 and 3,000 AF per year and that the SBCWA methodologies, including use of the SBCWA Santa Maria Valley water budget model (SMVWBM) to assess basin conditions, are both effective and comprehensive. This assessment also confirms that the importation of State Water has taken considerable pressure off of the groundwater resources in this basin.

Year	Agency	Calculated Overdraft (AF/y)	Base Period Used
1946	USGS	12,000	1931-1946
1966	USGS	20,000	1931-1966
1976	City of S.M.	6,000	1935-1974
1976	USGS	10,000	1946-1976
1977	SBCWA	20,000	1918-1975
1991	SBCWA	15,700	1918-1990
2000	SMVWCD	0	1968-1989
2002	SBCWA	2,400	1943-1999

Table 6: Historical Water Budget Analyses for the Santa Maria Groundwater Basin

The conditions of the basin can be assessed by looking at the hydrograph in Figure 41 below from State Well 10N/34W-14E5:

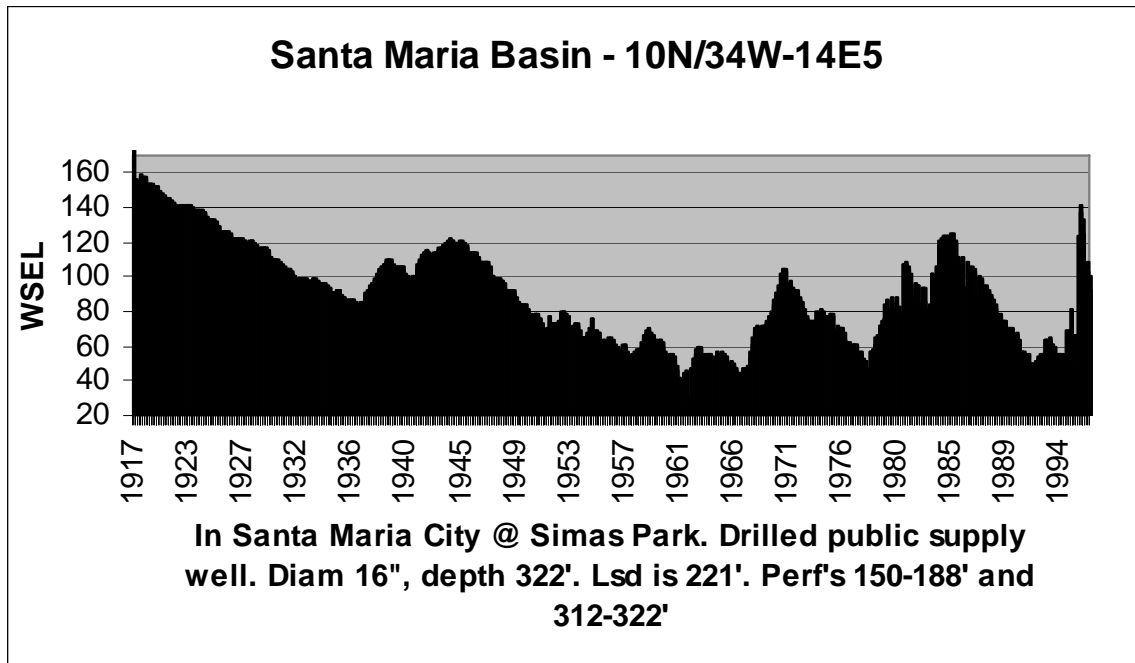


Figure 41: Hydrograph for State Well 10N/34W-14E5

Note that during the early part of the record, the slopes of both increasing and decreasing water levels are more gradual than those of the later part of the century. The higher rate of *filling* in the later part of the century is a function of the presence of the Twitchell Reservoir Project, which adds, on average, an additional 18,000 AF per year of recharge to the basin. The higher rate of dewatering is due to increased pumpage of the basin. This information indicates that given an extreme drought such as the 1987-1991 or 1945-1951 droughts, and under current usage conditions, that the basin would be dewatered at an alarming rate, and could result in the lowest water levels in recorded history.

The gross Perennial Yield of the basin is estimated to be approximately 125,000 Acre-Feet per year. Water storage above sea level within the basin was estimated to be about 2.5 million AF (MAF) in 1984, 1.97 MAF in 1991, and 2.5 MAF in 2002 (Ahlroth, 2002). The maximum recorded storage level occurred in 1918 and was estimated to be over 3 MAF. The portion of the groundwater basin located in San Luis Obispo County is estimated to contain storage of 45,600 AF, a part of which is included in the SBCWA estimate (California Department of Water Resources, 1979).



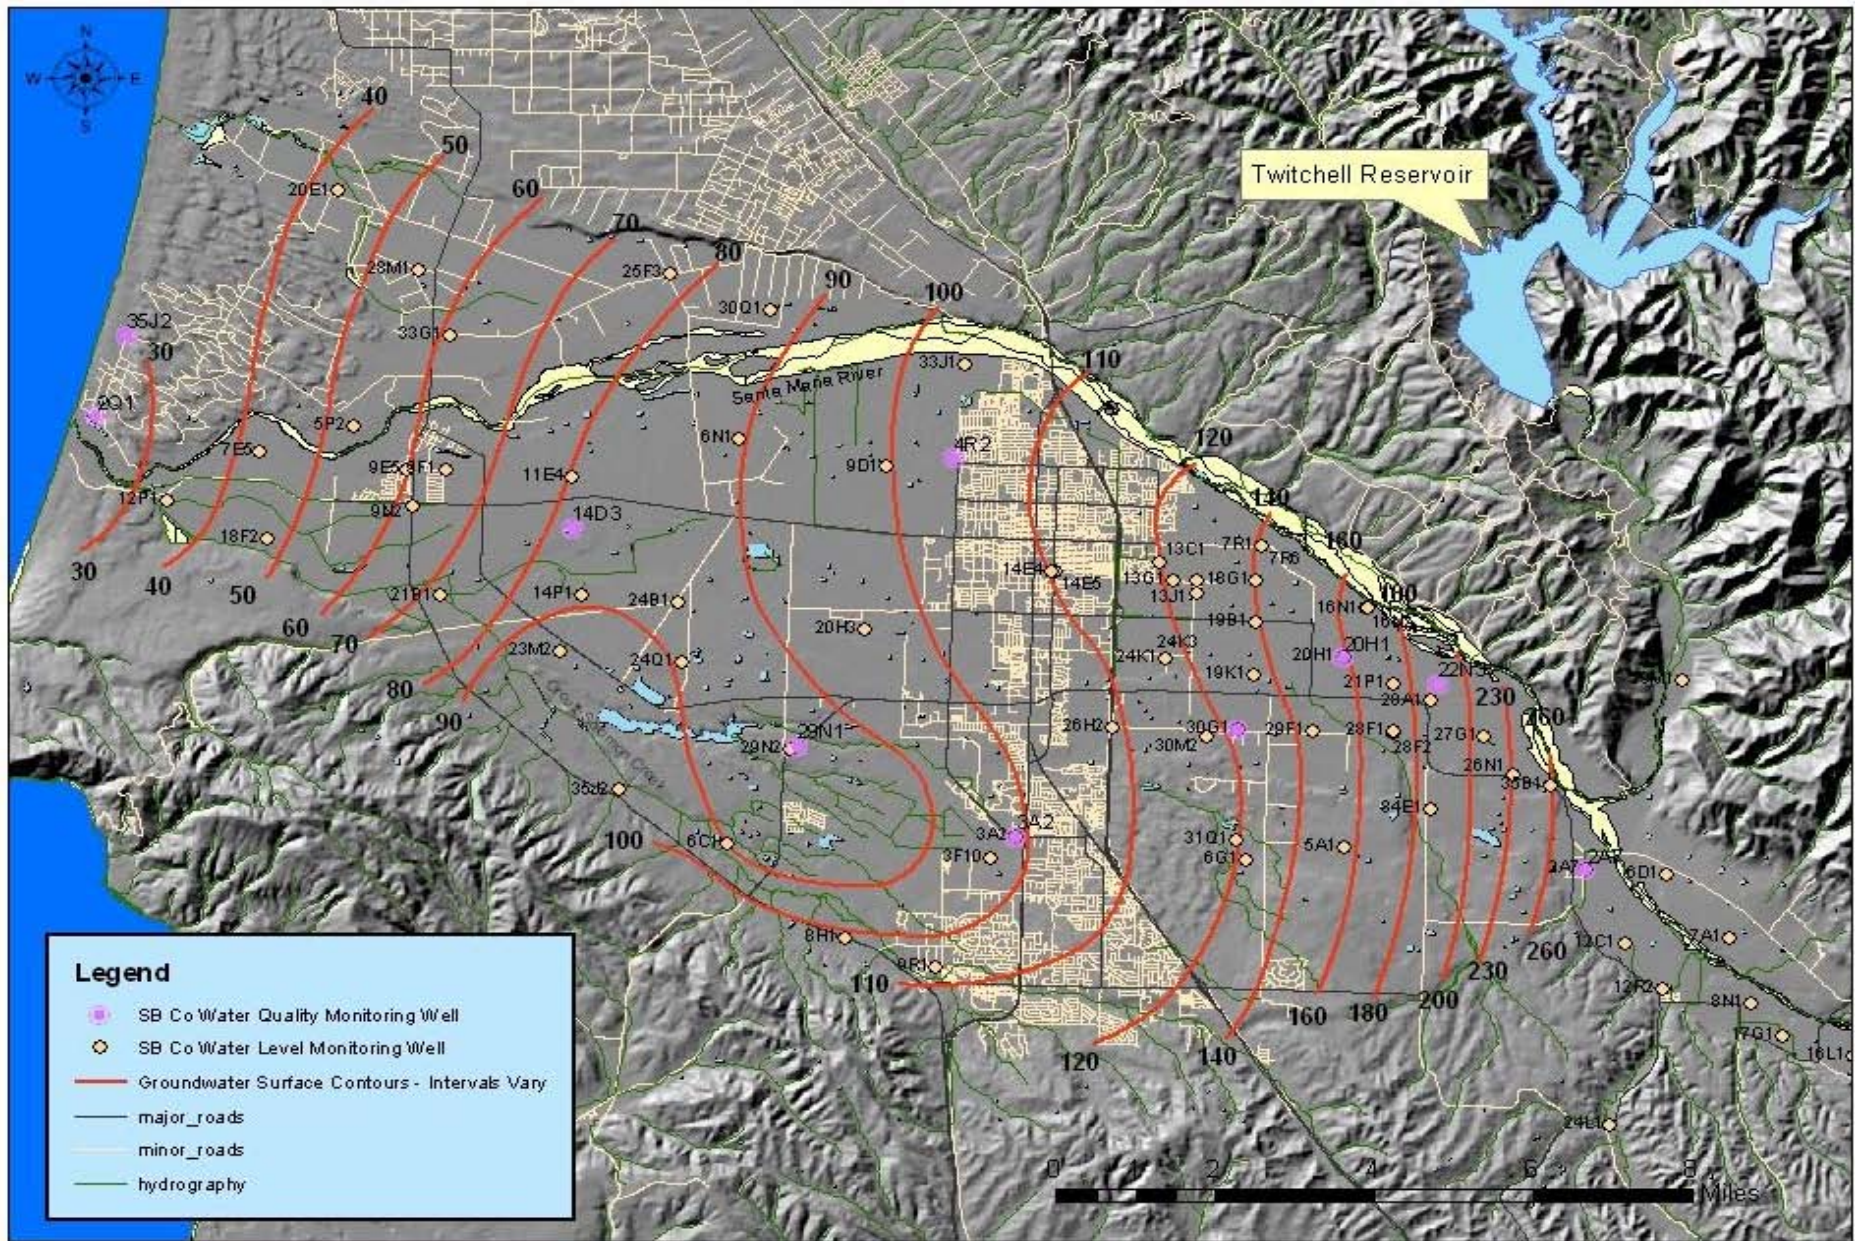


Figure 42: Spring 2004 Groundwater Level Contours for the Santa Maria Groundwater Basin Main Unit

## ***Water Supply and Usage***

The basin supplies groundwater to the City of Santa Maria, Golden State Water Company, the City of Guadalupe, Casmalia Community Services District, oil operations and private agriculture throughout the Valley. Groundwater was the only source of water used within the Valley until 1997 when State Water was imported as an additional source. Table 7 on the following page lists groundwater extractions from the water purveyors within the Santa Maria Basin. Note that the town of Casmalia lies outside of the Santa Maria Basin but the water supplied to the town is drawn from just within the Basin boundary. In addition, agricultural, oil industry and farmstead usage is estimated to be around 120,000 Acre-Feet per Year (gross amount).

The Cities of Santa Maria and Guadalupe, and Golden State Water Company (formally California Cities Water Company) have contracted to receive a combined total of 17,250 AFY from the State Water Project (SWP) consisting of 16,200 AFY, 550 AFY and 500 AFY of allocation respectively (see State Water Project, page 8). Actual deliveries in 2008 were 7,792 AF to the City of Santa Maria, 348 AF to the City of Guadalupe and 228 AF to Golden State Water Company. According to the City of Santa Maria Water Master Plan, approximately two-thirds of its SWP supply is designated for blending purposes to meet established City water quality objectives and will not be used to support new development. Thus, this use of SWP water represents a corresponding reduction in long-term pumpage (and overdraft) of the basin. Another benefit of SWP water importation is the relatively high quality of Return Flows from water use in the City. This serves to improve overall water quality in the basin.

It should be noted that the maximum amount of SWP water allocation actually delivered to the basin depends on a number of factors including state wide climate, water trade and supplemental programs, and environmental constraints. For example, the SWP has limited 2009 deliveries to 40 percent of maximum allocation due to environmental constraints and lack of storage in surface reservoirs due to several years of below normal snow pack in the Sierra Nevada Mountains of California.



<b>Groundwater Production in the Santa Maria Basin by Purveyor Acre-Feet</b>				
<b>Year</b>	<b>City of Santa Maria</b>	<b>Golden State Water Company</b>	<b>City of Guadalupe</b>	<b>Casmalia Community Services District</b>
1990	12,057	8,691	724	no data
1991	11,478	8,210	685	no data
1992	11,636	8,381	718	no data
1993	11,835	8,174	653	no data
1994	12,133	8,572	668	no data
1995	12,265	8,447	662	no data
1996	12,323	9,906	585	no data
1997	8,011	9,375	622	no data
1998	410	7,921	303	no data
1999	454	9,043	265	no data
2000	547	9,131	300	no data
2001	2,698	8,772	434	no data
2002	468	9,210	384	no data
2003	1,178	8,865	no data	22
2004	1,223	9,159	no data	no data
2005	897	8,625	415	29
2006	543	8,511	411	17
2007	2,550	9,393	no data	17
2008	6,626	9,083	684	19

Table 7: 1990-2008 Groundwater Production by Water Purveyor

## **Water Quality**

Reports by Worts (1951), Toups Corporation (1976), Brown and Caldwell (1976) and Hughes (1977) best describe the conditions of water quality within the Basin. Also, the Cachuma Resource Conservation District produced the *Santa Maria Watershed Non-point Source Pollution Management Plan* in September 2000, which serves as a mitigation plan for water quality impairments in the basin and summarizes water quality conditions. Water quality within the basin has been positively affected by the operations of Twitchell Reservoir in which the high sulfate and salts of water from the Cuyama Valley are diluted with the better quality runoff from the Huasna and Alamo Watersheds prior to release. The recharge from Twitchell Reservoir has been reduced from 20,000 AFY per year to 18,000 AFY per year due to the loss of storage from siltation. This estimate does not include the additional recharge from the cloudseeding program and surcharging of the reservoir as they are not yet long-term approved programs.

As with most groundwater basins, the Santa Maria Basin exhibits better water quality in the deeper and confined aquifer than in that of the shallow or "water table" aquifer. The shallow zones *usually* contain the most water quality impairments due to the infiltration of pollutants and poor quality surface water. The importation of State Water which is generally of better quality than the local sources provides for higher quality "Return Flows" and thus improves the basin water quality. In addition to improvements provided by the operations of Twitchell Reservoir and State Water importation, the Laguna Sanitation District helps to improve water quality in the basin by utilizing a reverse osmosis process to remove, and a deep injection well to dispose of, approximately 8,000 pounds of salts per day, which would otherwise accumulate in the basin system. With the deep injection system these salts stay far below the aquifer and are not a threat to return to the aquifer. Water quality data is currently collected as part of the County Water Resources-USGS monitoring program as well as from area specific programs, such as the City of Santa Maria and Laguna Sanitation District sewage treatment plants and Golden State Water Company which serves water to the Orcutt, Tanglewood, Lake Marie and Sisquoc areas. Table 8 on page 83 lists current water quality monitoring sites as part of the County Water Resources-USGS monitoring program.

### Total Dissolved Solids

Data collected from observation wells for a *1976-1977 USGS study* indicated that TDS concentrations generally increase from east to west, with the highest levels occurring in the western part of the basin and TDS concentrations near Guadalupe at over 3,000 mg/l. It must be noted that these measurements most likely were made from wells drawing from the shallow water table and may not be indicative of the complete aquifer. Currently, TDS concentrations near Guadalupe are measured at around 1500 mg/l and in the center of the basin under the town of Santa Maria also appear to be relatively high (see Figure 43 on the following page). Again this is most likely due to recycling of shallow water from irrigation and may not be representative of the aquifer as a whole.

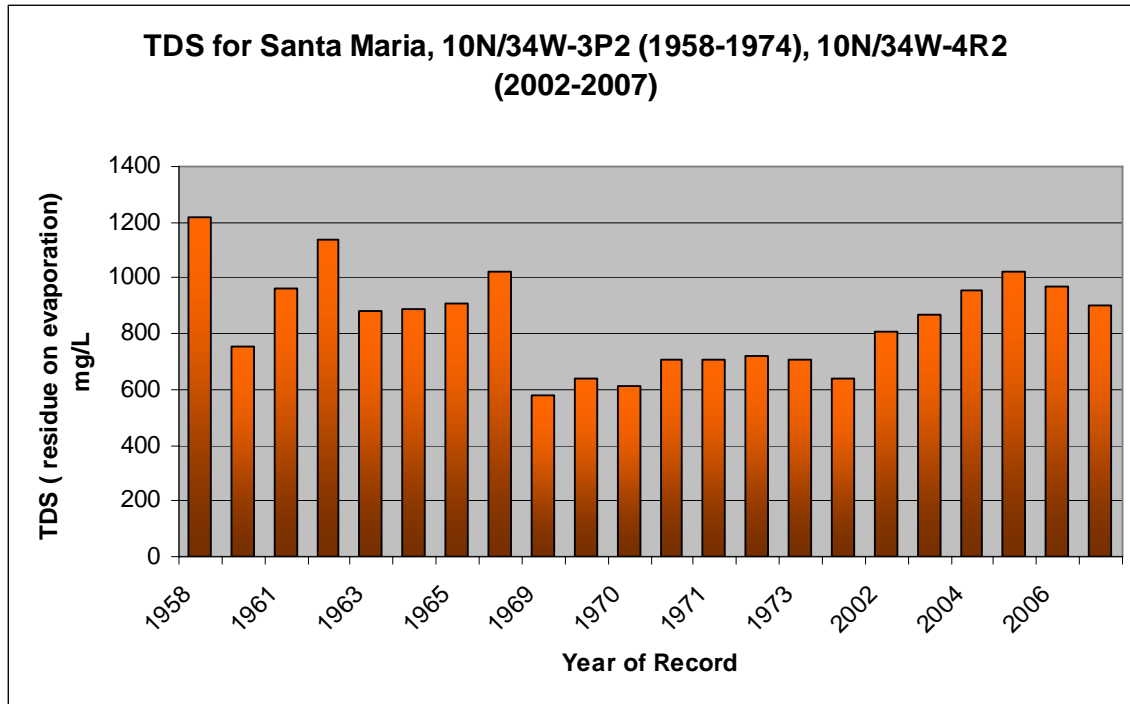


Figure 43: TDS in the Santa Maria Basin 1958-2007

TDS levels increased significantly in Orcutt area wells after the 1930s but have remained relatively stable or even decreased since 1987. The importation and domestic use of State Water Project water now results in better quality discharge from the City of Santa Maria treatment plant on Black Road and also from Laguna Sanitation District to the south. This may greatly improve future water quality within the basin.

#### Nitrates-Sulfates

A study conducted by the State of California Regional Water Quality Control Board (1995) indicates that the basin is subject to nitrate contamination, particularly in the vicinity of the City of Santa Maria and in Guadalupe. The study shows that nitrate concentrations have increased from less than 30 mg/l in the 1950s to over 100 mg/l in the 1990s in some parts of the basin. It is again important to note that there is a significant difference in water quality between shallow and deep water. Movement between these different aquifer zones is complex and not well documented. Certainly, the flushing of the basin from wetter climate and lower usage would help protect against water quality impairments.



**Construction Information  
For Groundwater Quality Monitoring Sites**

**(Listed East to West)**

<u>State Well ID</u>	<u>USGS Number</u>	<u>Depth</u>	<u>Screen Intervals</u>
9N/33W-2A1	345324120184201	48'	
9N/33W-2A7	345325120184201	512'	125'-507'
10N/33W-22N3 <sup>1</sup>	345535120204401		
10N/33W-20H1	345552120220001	175'	100'-175'
10N/33W-30G1	345459120232301	662'	325'-662'
10N/34W-26H2	345459120250301	445'	unknown
9N/34W-3A2	345340120261801	331'	247'-331'
10N/34W-4R2	345808120271401	401'	160'-400'
10N/34W-29N1	345441120291301	112'	107'-
10N/35W-14D3	345712120321701	350'	102'-
10N/36W-2Q1*	345823120383901	671'	568'-671'
10N/36W-2Q3*	345823120383903	444'	397'-444'
10N/36W-2Q4*	345823120383904	378'	291'-378'
10N/36W-2Q7*	345823120383907	44.2'	18.5'-46.5'
11N/36W-35J2*	345921120381601	615'	527'-615'
11N/36W-35J3*	345921120381602	495'	247'-495'
11N/36W-35J4*	345921120381603	228'	175'-228'
11N/36W-35J5*	345921120381604	138'	74'-138'

Description of Surface Water Quality Monitoring Sites

<u>Station Number</u>	<u>Description</u>	<u>Watershed Size</u>
11136800	Cuyama River below Buckhorn Canyon	886 sq. mi.
11138500	Sisquoc River near Sisquoc	281 sq. mi.
11141050	Orcutt Creek near Orcutt	18.5 sq. mi.
345727120375401 <sup>2</sup>	Green Canyon Creek @ Main St. near Guadalupe	5.28 sq. mi

<sup>1</sup>Still searching for construction information on this site

<sup>2</sup>This is actually a “site ID” as no “station ID” is listed for this site

Table 8: Water Quality Monitoring Sites in the Santa Maria Valley

**Salt Water Intrusion**

Coastal monitoring wells are measured biannually for any indication of seawater intrusion; to date there has been no evidence of such. The concern of seawater intrusion is based on evidence that the Careaga Sand outcrops on the ocean floor several miles west and there are no known barriers to seawater intrusion. Although it is possible that the seawater-fresh water interface has migrated shoreward during drought periods, the slope of groundwater has remained to the west in the westernmost part of

the basin. Figure 44 below illustrates the consistency of chloride concentrations though time.

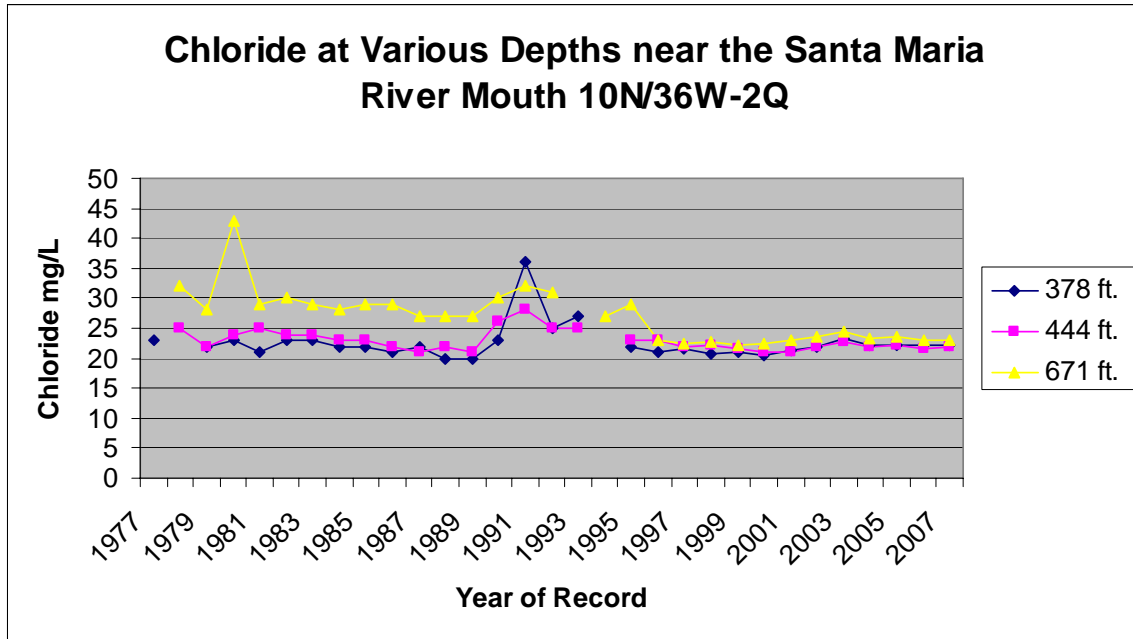


Figure 44: Chloride concentration for State Wells 10N/36-2Q3-7

#### Basin Wide “Salts Balance”

Sources of salt inflow to the Santa Maria Groundwater Basin include surface runoff, M&I accretions and agricultural Return Flows. Salt removal from the basin occurs through the processes of surface and subsurface outflow. The Water Agency estimated in 1977 that net salt addition to the basin was about 48,000 tons per year (Ahlroth et al) under 1975 conditions and that by 2000 it would be about 53,000 tons per year. A revised analysis of salt loading is a significant task and the Agency is unaware of any similar work to date. As previously mentioned Laguna Sanitation’s deep injection of salts greatly helps the basin salt balance.

#### 2006-2008 Trends

During the period 2006-2008, the period since the last SBCWA Groundwater Report, the Santa Maria Groundwater Basin received only minor recharge from the spring storms of 2006 and moderate storms of January 2008 that produced runoff after the Zaca Fire. The table below illustrates the rainfall amounts. Note that average precipitation years generally do not produce runoff.

Station	WY 2005-2006	WY 2006-2007	WY 2007-2008	Average
Santa Maria	16.42	5.24	13.63	13.82
Sisquoc	19.28	5.85	15.42	15.03
Twitchell Dam	24.44	8.36	17.34	16.90

Table 9: Precipitation for the Santa Maria Watershed from 2006 through 2008

At the current time groundwater quality is measured at 11 sites throughout the basin and groundwater level is measured at 81 sites. There was little to no change in water quality in the basin between 2006-2008. There was some recharge from the spring of 2006 storms which brought water levels up in 2007, and there was limited recharge in 2008 after the Zaca Fire. However, fine clay loam sediments from the burned area plugged the Santa Maria River channel and as a result not much of the water that flowed in the river in 2008 was able to percolate into the aquifer. In the eastern part of the basin there are places where water level remained steady (9N/33W-12R2) and places where the water level dropped in excess of 20 feet (10N/33W-26N1). This is most likely due to localized pumping patterns. In the central part of the basin, water level has dropped, on average two to five feet during the period. In the far western part of the basin, water level remained steady during the period 2006-2008.

**Recent Litigation**

Litigation regarding the status and use of groundwater in the Santa Maria Basin was initiated in 1997. Records of these proceedings are available at the website:

<http://www.sccomplex.org/home/index.htm>.

**Santa Maria Groundwater Basin**

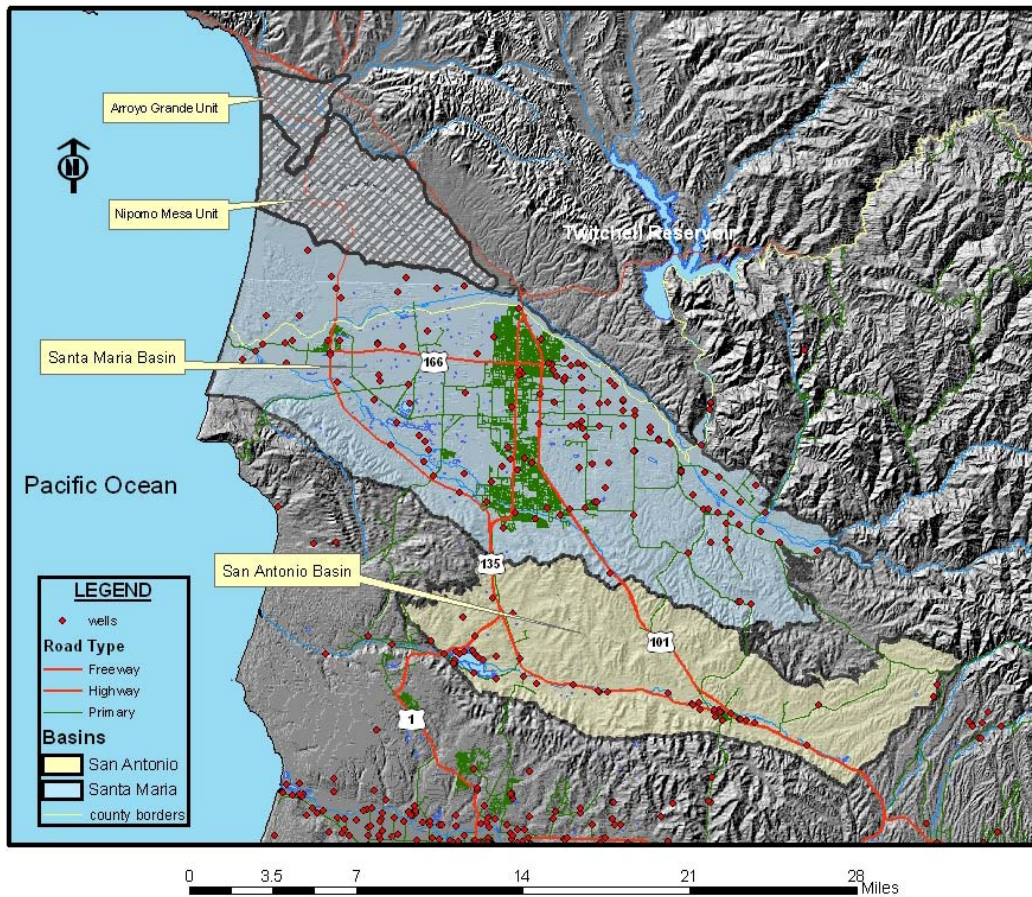


Figure 45: Santa Maria Groundwater Basin Units

The litigation encompassed all of the Santa Maria Groundwater Basin, not just that part within Santa Barbara County. As previously mentioned, the Santa Maria Groundwater Basin has three distinguishable units that appear to have only limited interaction: the Main Basin Unit, the Nipomo Mesa Unit, and the Arroyo Grande Unit. These units were evaluated in the litigation as one complete basin. However as part of the stipulation they are considered separate management areas. The judge ruled in proceedings that the basin is not currently in overdraft but that overdraft is likely in the future unless additional conservation measures are undertaken. Overdraft is defined as more water being taken out the basin than is being recharged, over a long period of time. In other words, overdraft can be defined as exceeding the Safe Yield of the Groundwater Basin (see Groundwater Terms section, page 5).

The Water Agency, USGS, DWR, and private entities have evaluated the status of the basin; most parties have agreed that the basin has historically been in overdraft to a small, but significant amount. Any amount of overdraft in the basin is significant because overdraft may contribute to water quality degradation including the buildup of nitrates, sulfates, total dissolved solids, and the threat of salt-water intrusion.

SBCWA has an extensive network of water level monitoring wells throughout the basin and when utilized to calculate the storage of groundwater they show that there is indeed a long-term decline in the amount of stored water above sea level in the basin. Recharge to the basin through rainfall infiltration and stream seepage is the dominant factor when evaluating the water budget of a basin. By manipulating the base period to include a wetter or dryer climate, one can produce results showing the basin to be in overdraft, balance, or surplus. To provide the most realistic results, a base period that is most representative of the long term climate must be chosen. Therefore, SBCWA has used a 1943-1999 base period that is believed by staff to be the most representative period available of the basin's long-term climate (see Table 6 on page 77 which lists the different analyses over time and the base periods used).



# Cuyama Groundwater Basin

## Physical Description

The Cuyama Valley is a rural agricultural area about 35 miles north of the City of Santa Barbara and is bound by Sierra Madre Mountains on the south and by the Caliente Range on the north. Although located within the coastal ranges of Southern California the climate is similar to high desert due to the surrounding high mountain ranges. The Cuyama River drains the Valley with a surface water drainage area of 690 square miles of Santa Barbara, San Luis Obispo, Ventura and Kern Counties. Land surface elevations in the *watershed* vary from 800 feet above mean sea level near Twitchell Reservoir to over 8000 feet at Mt. Pinos and land surface elevations within the *Groundwater Basin proper* vary from around 1950 feet to 3600 feet above mean sea level. Average rainfall ranges from about 8 inches per year on the valley floor to 24 inches per year at the crest of the Sierra Madre Mountains. The Cuyama Valley is a down faulted block or graben that is bordered on the north by the Morales and Whiterock Faults and on the south by the South Cuyama and Ozena Faults. The eastern part of the central valley is underlain by a syncline whose strike is parallel to the elongation of the valley and plunges towards the northwest. The north limb of this fold is truncated against the Morales Fault (Singer and Swarzenski, 1970).



Figure 46: The Cuyama Valley



The Cuyama Groundwater Basin supports a variety of crops; however the two largest agricultural operators in the area, Grimmway and Bolthouse, focus on carrots. Most of the valley floor is controlled by Grimmway or Bolthouse. As of early 2009, remaining vineyards and nectarine orchards on the valley floor are being removed to make way for expansion of carrots. In addition to carrots onions, alfalfa, barley, potatoes, vineyards and pistachios make up the bulk of the agricultural variety, but most of those are grown in the upper part of the basin near Ventucopa.

### ***History and Analyses***

The basin is best described by Upson and Worts (1951) and Singer and Swarzenski (1970). Agricultural water use began in 1938 and has since progressively increased. Groundwater within the basin makes up 100 percent of water supply for Cuyama Valley agriculture, petroleum operations, businesses, homes and farmsteads. Agriculture accounts for over 95 percent of the water use within the Valley.

Singer and Swarzenski in 1970 estimated a 21,000 AFY overdraft and a dewatered storage of over 400,000 Acre-Feet based on the period 1947-1966. A water budget completed by the County in 1992 estimated a 28,000 AFY overdraft (Baca et al., 1992). An evaluation by the California Department of Water Resources indicated that there was an average groundwater overdraft of 14,600 AFY based on the period 1982-1993 (Pierotti and Levy, 1998). Historical water level declines of 200-250 feet are not uncommon in the main part of the basin where a pumping depression exists. An analysis by the County Water Agency in 2008 indicated a current dewatered storage of over 1,500,000 AF. According to the Cachuma Resource Conservation District irrigated acreage within the basin has greatly increased over the last 10 to 15 years and is now about 30,000 acres, thus indicating that estimates of the gross water demand may be low.



Figure 47: Alfalfa with the Caliente Mountains in the Background

**Hydrograph from the Center Part of the Basin, State Well ID 10N/26W-15N1**

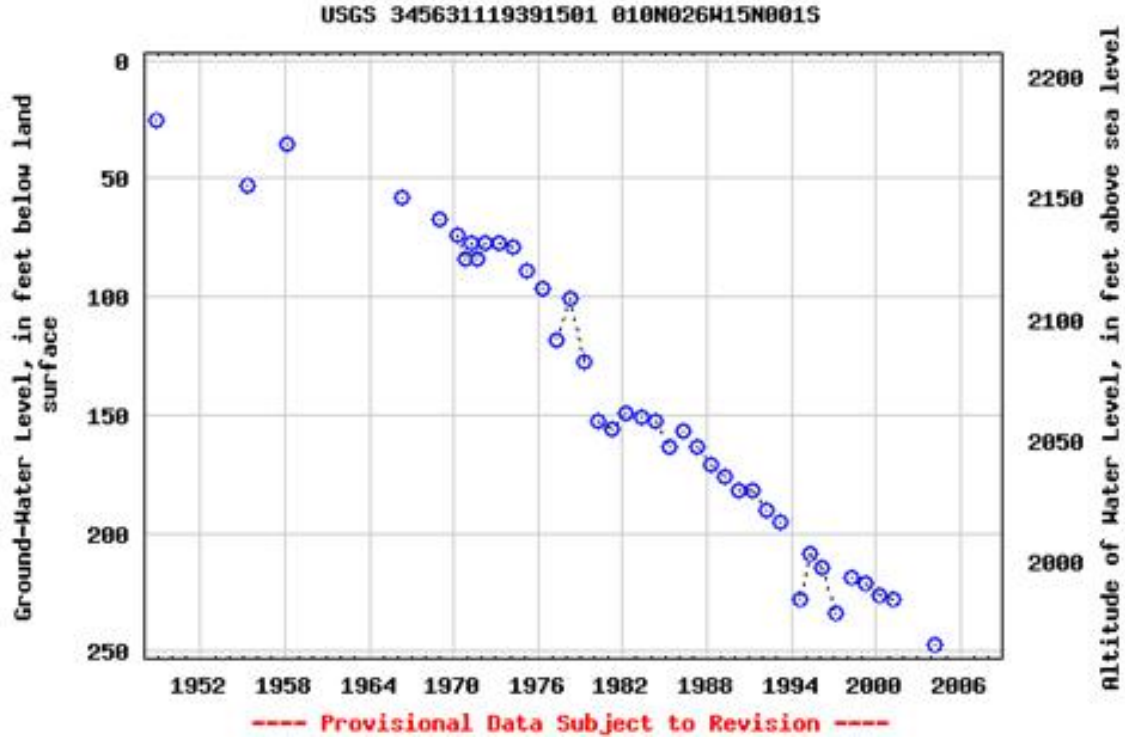


Figure 48: Hydrograph of State Well 10N/26W-15N1

From Figure 48 above it is evident that water levels in the center part of the Basin are around 200 feet lower than before the development of agriculture in the area. The very wet period of 1992 to 2006 appears to have slowed the progressive drop but as this was the second wettest period of climate on record dating back to the late 1800's for the area the downward trend would be expected to continue.

**Water Quality**

Ground water quality in the Cuyama Basin ranges from hard to very hard and is predominantly of the calcium and magnesium-sulfate type, in great part due to the abundance of gypsum as a source material in the middle and upper parts of the watershed (Upson and Worts, 1948). Total dissolved solids typically range from 1,500 mg/l to 1800 mg/l in the main part of the basin. In the Cuyama Badlands on the eastern part of the basin sub watersheds Ballinger, Quatal, and Apache Canyons have better water quality of a sodium or calcium bicarbonate type with total dissolved solids typically ranging from 400 mg/l to 700 mg/l. Figure 48 on the following page demonstrates this difference. The Main Zone Well (20H1) averages around 2000 mg/l whereas the Badlands Well (33M1) averages 700-750 mg/l. Note the spikes on Badlands Well 33M1 which follow wet rainfall years of 1969 and 1994. Presumably be attributed due to

overland flow from rainfall which after dry periods is flushing the upper part of the basin.

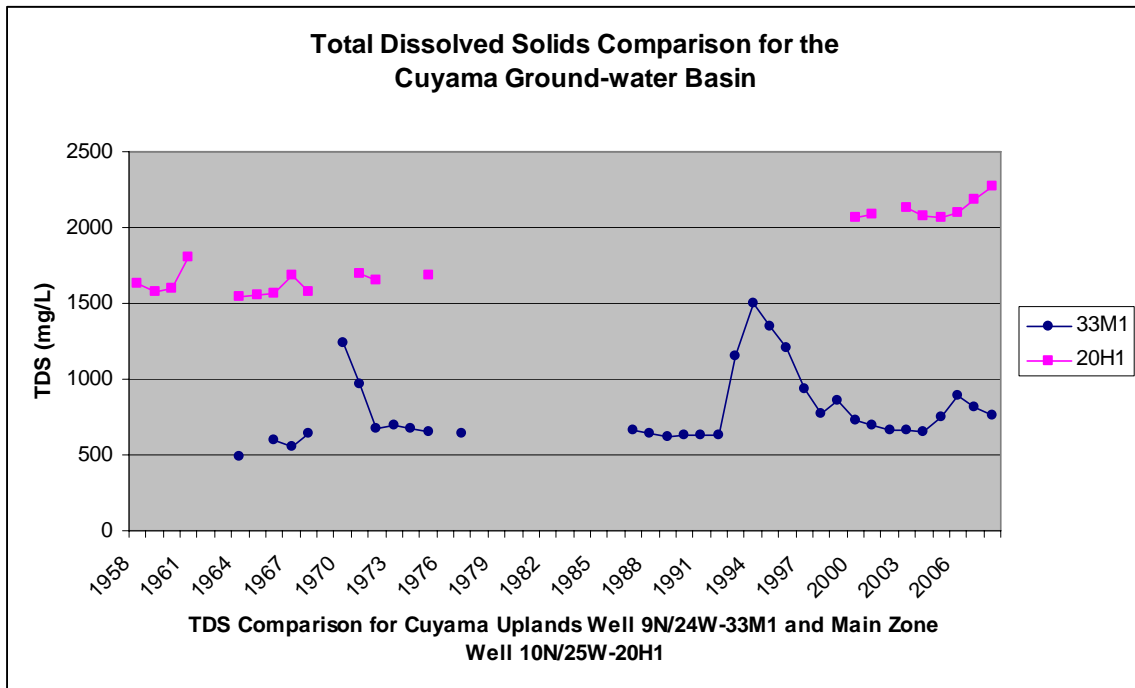


Figure 49: Total Dissolved Solids for State Wells 9N/24W-33M1 and 10N/25W-20H1

Figure 50 below reflects boron concentrations in the basin. Boron is generally higher in the upper part of the basin (9N/24W-33M1) and shows up more in the uplands shallow (233 feet deep) well than deeper wells (depths of 1000 feet) in the main part of the basin. Boron is not regulated but is generally accepted to be detrimental at about 300 ug/l.

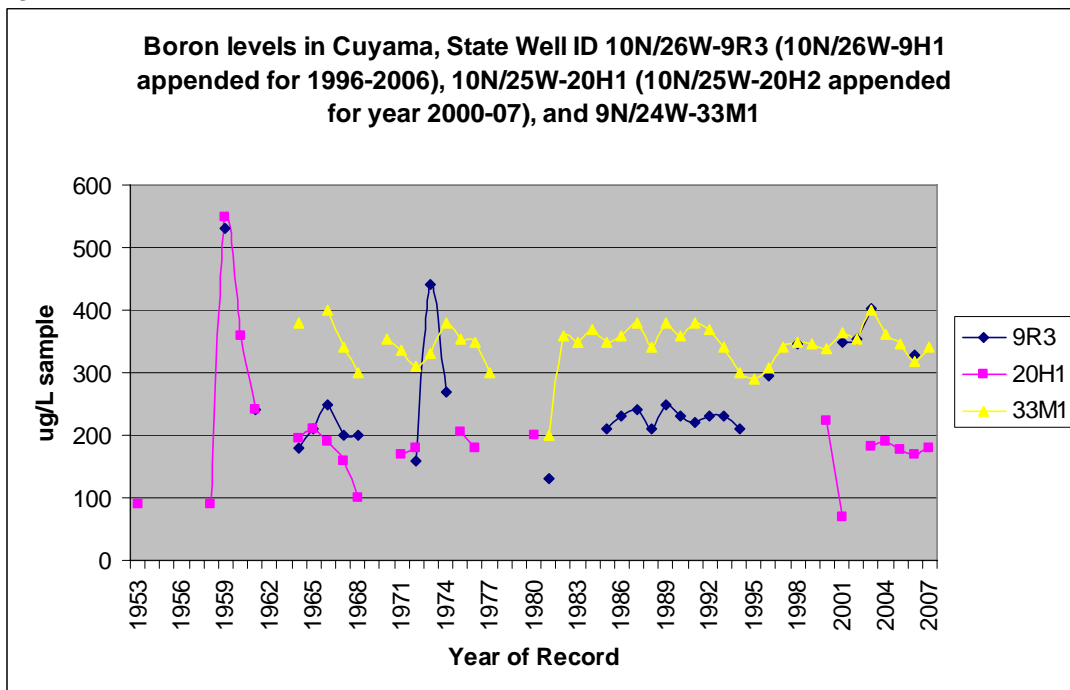


Figure 50: Boron for State Wells 10N/26W-9R3, 10N/25W-20H1 and 9N/24W-33M1

Water quantity and quality deteriorate toward the west end of the basin, where the basin sediments thin. Toward the northeast end of the basin at extreme depth there exists poor quality water, perhaps connate from rocks of marine origin. Although groundwater in the Cuyama Valley is only of fair to poor chemical quality, it has been used successfully to irrigate most crops. Presumably this has been possible because the sodium content of most of the water is relatively low and the soils are quite permeable. However, the leaching of soils carries dissolved salts from the root zone to the water table and may impact water quality over time (Singer and Swarzenski, 1970).

**2006-2008 Trends**

Rainfall during the period was below average as Table 10 below illustrates.

Station	Elevation	2006 total	2007 total	2008 total	Historical Average
Cuyama	2275'	8.38	3.19	5.25	8.37
SB Canyon	3000'	15.50	5.06	10.40	12.98
Ozena	3568'	20.20	5.20	16.00	18.79

Table 10: Cuyama Valley Precipitation 2006-2008


During the period 2006 through 2008 water quality was measured at four sites in the basin and water level was monitored at 17 sites. The four water quality sites were moved around due to land owner permission and lack of ability to gain construction records (depth of well and screen intervals). This makes comparison during the period difficult. The water quality sites that are currently being monitored as of 2008 as part of the regular Santa Barbara County and United States Geological Survey cooperative water resources data collection program are:

9N/24W-33M1	Lambert Homestead	233' deep
10N/25W-21Q2	Cuyama High School	695' deep
10N/26W-24J4	Cuyama Elementary School	1200' deep
10N/25W-34N1	Cuyama Dairy	unknown

There was little change in total dissolved solids, calcium, magnesium, nitrates and sulfates during the 2006-2008 period. In some cases, concentrations of the above mentioned nutrients actually fell during the period, most likely due to a lack of rainfall, recharge and flushing of the watershed.

Seventeen water level sites were monitored throughout the Cuyama Groundwater basin annually during the period. The trends are as follows: In the Ventucopa Uplands the trend is downward, again presumably due to lack of direct rainfall and recharge during the period. The Ventucopa Uplands is a relatively shallow unconfined aquifer that quickly responds to year to year climate. Declines in the area were three feet to 15 feet. In the main zone of the Cuyama Basin where there is more water available but at much greater depths and is geo-hydrologically confined (under pressure) the trends were downward, with declines of 20 feet to 30 feet not uncommon. In the Sierra Madre foothills area which contains the pumping field for the New Cuyama Community Services District some wells are up just a few feet (10N/26W-20M1) while other are down just a few feet (9N/26W-1F3).



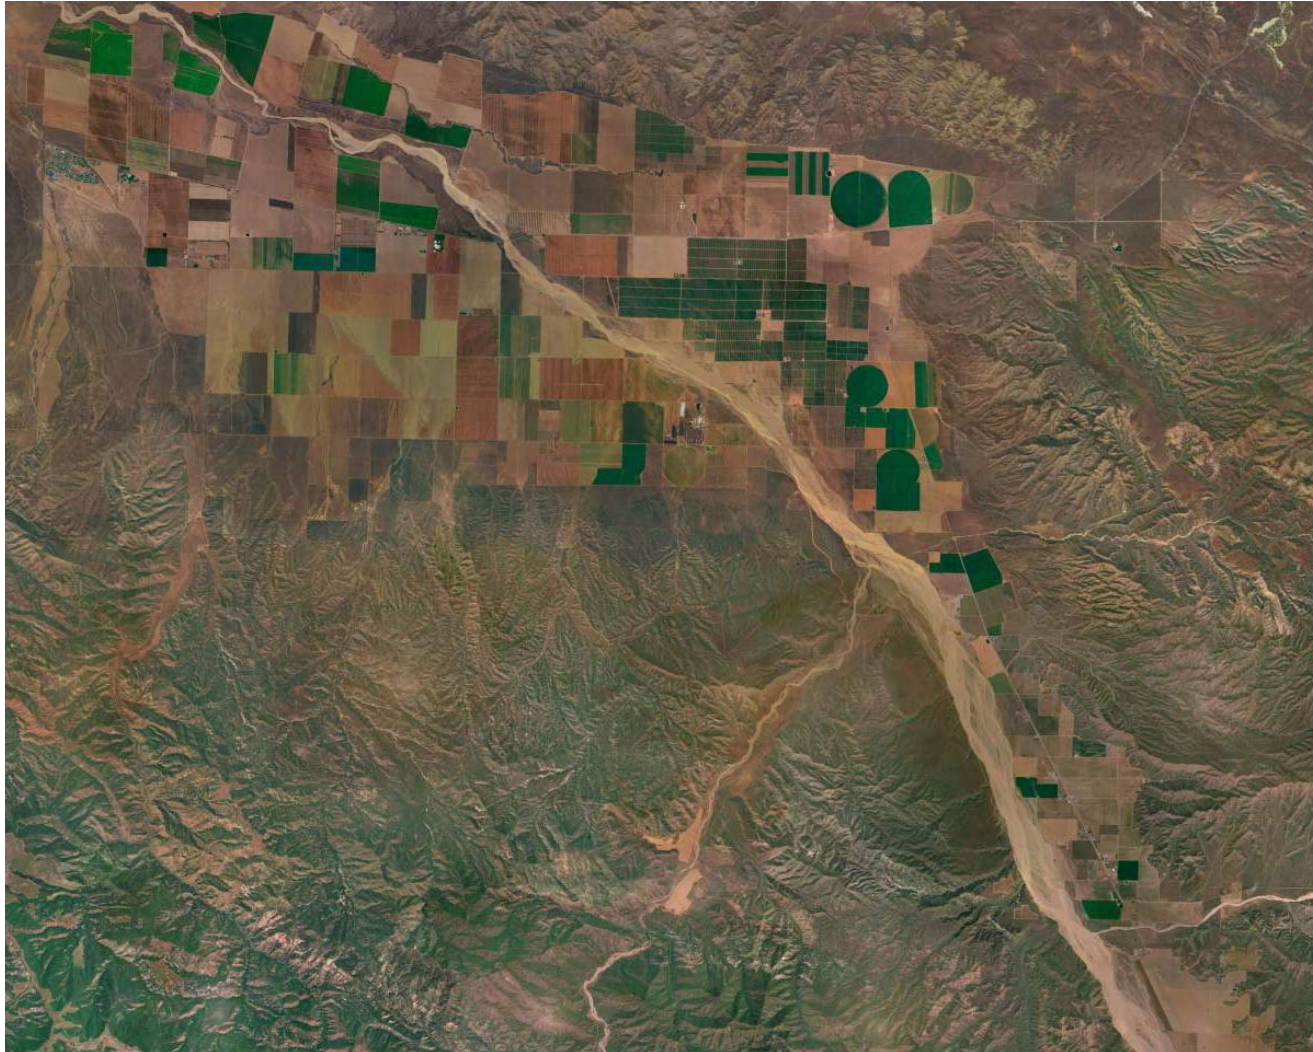

**Aerial Photograph of the Cuyama River Valley from May of 2000.** Prominent features include the Cuyama River bi-secting the basin and moving water southeast to northwest, Santa Barbara Canyon draining from the southwest, the main part of the basin where row crops are being utilized (mainly carrots) which is where the groundwater depths are the greatest, and the narrower Upper Cuyama River corridor around the Ventucopa area where a variety of crops such as alfalfa, barley, pistachios, grapes, onions and beans are being grown.

Figure 51: Aerial Photograph of the Cuyama River Valley



### **2008-2012 Cuyama Groundwater Basin Study**

Due to concerns raised by constituents in the Cuyama Valley the Santa Barbara County Water Agency has been commissioned to produce a comprehensive report on current and future water availability of the Cuyama Groundwater basin. The Water Agency is conducting this study in cooperation with the United States Geological Survey as the USGS holds the most expertise and highest level of credibility in the field of water resources science investigations. This project is being conducted over a four year period, ending in approximately 2012. Projects of these types take a long time due to the nature of equipment installation, data collection and analysis. Along with periodical updates a final report will be published. The USGS will cost share for some of the elements of the project. Total cost to the Water Agency over the four year period is estimated to be \$1,400,000.

The proposed study will include five main tasks: (1) data compilation, (2) new data acquisition, (3) model development, (4) analysis of water availability, and (5) report preparation. Climate, land-use, geologic, hydrologic, water-quality, and geodetic data will be compiled and assembled into a Geographic Information System and integrated into new monitoring networks. New data collection includes depth-dependent or aquifer dependent geo-hydrologic and geochemical data from existing wells, and from the installation of up to four new multi-well monitoring sites in the valley. The existing monitoring network maintained by Santa Barbara County and the USGS will be enhanced during the study period and be used to collect temporal and spatial water-level and water-quality data. Streamflow data will be collected at selected streams to help determine the recharge characteristics of the valley. Geodetic data will be collected to determine if subsidence is occurring in the valley. Geo-hydrologic and hydrologic models will be developed to more accurately assess and simulate the storage and flow of water in Cuyama Valley. The hydrologic model will be used to perform selected water-use and climate scenario analyses to address the possible alternatives to current water use and development. Data collected on the three-dimensional character of the aquifer flow and chemistry could indicate the need for future constraint of water use in the valley. The model will provide an analysis tool of the historical Groundwater use and an analysis of future water availability under different water-use scenarios.

The image on the following page shows the current monitoring network as of December 2008. The monitoring sites have been increased from 17 to 47. It is anticipated that more will be added during the next few years.



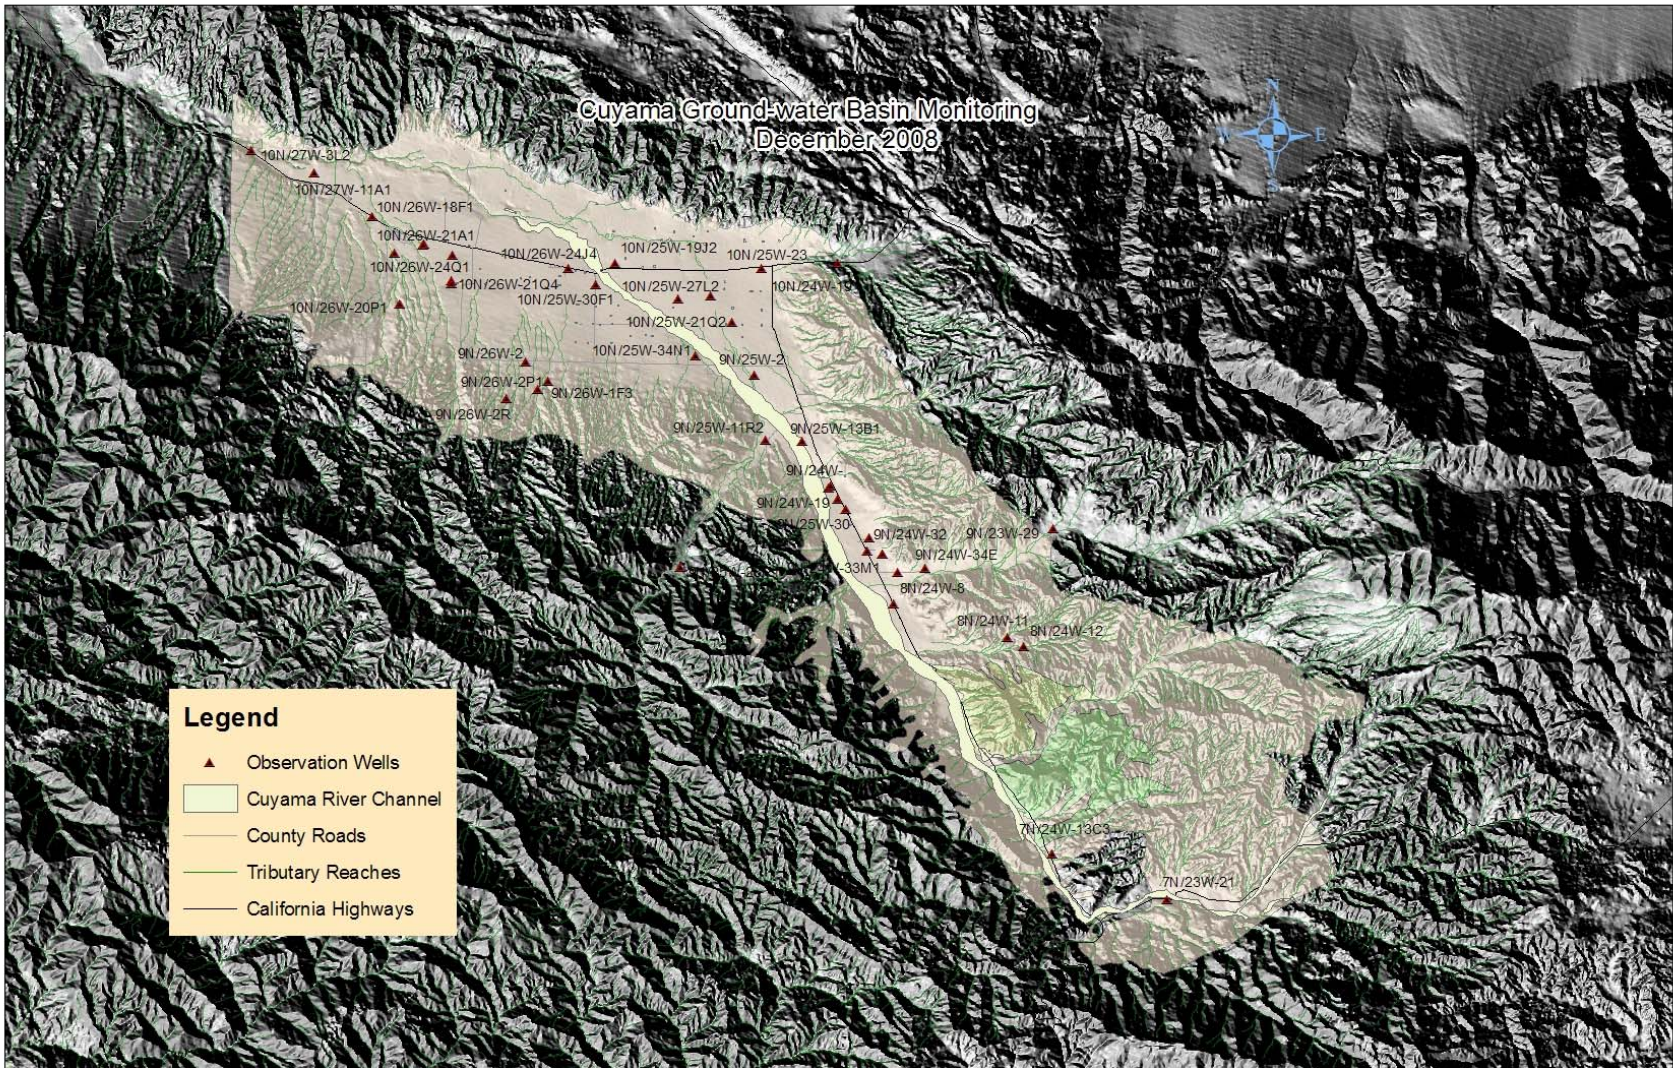


Figure 52: Cuyama Groundwater Basin



## **Other Groundwater Extraction Areas**

The following extraction areas are relatively small, undeveloped or lacking groundwater data:

### ***More Ranch Groundwater Basin***

The supply/demand status of this basin was updated in a 1993 study (Baca, 1993) prepared by the County. The discussion presented below reflects this report. The More Ranch Basin occupies about 502 acres in the southern Goleta area between the More Ranch Fault and the Pacific Ocean. The unconsolidated sand and silt of Santa Barbara Formation that comprise the basin overlie consolidated bedrock of the Sisquoc and Monterey formations. Most of the area encompassed by this basin is in open space. Developed land uses include residential dwellings with some open field and greenhouse agriculture. Water quality within the basin averages from 800 to 2,300 mg/l, TDS. The Safe Yield of the basin is estimated to be 84 AFY (gross), 76 AFY (net). The gross demand is estimated to be about 24 AFY, resulting in a surplus of 60 AFY.

### ***Ellwood to Gaviota Groundwater Area***

The Ellwood to Gaviota Groundwater Area covers about 105 square miles in the southern part of Santa Barbara County between the crest of the Santa Ynez Mountains and the Pacific Ocean. Geologically, the area consists of the south limb of a large anticline (concave upward fold) which forms the Santa Ynez Mountains. The terrace and alluvial deposits located near the coast formed as the mountains uplifted, folded and eroded. Rainfall in the area ranges from about 18 inches per year near the ocean to over 30 inches at the crest of the Santa Ynez Mountains. Surface drainage is south, down the steep slope of the mountains to the Pacific Ocean. The direction of groundwater flow is also south.

Samples analyzed from many groundwater wells in the late 1960s indicated that most of the ground water of the Ellwood-Gaviota area was too hard for domestic use without treatment. In addition, salinity was found at hazardous concentrations in many wells. Seawater intrusion might be occurring in alluvial areas near the coast. However, the presence of impermeable strata might prevent seawater from reaching deeper aquifers.

The USGS (Miller and Rapp, 1968) estimated the total ground water in storage above sea level within the area to be over 2 million acre feet. This study also estimated that average annual recharge (Safe Yield for net consumptive use) to this area is 6,000 AFY on the basis of groundwater discharge measurements. Groundwater comprises the majority of the water supply used within the area, although some Cachuma Reservoir water was imported into the eastern half of the region in the early 1960s (less than 1,000 AFY) and is still used in support of agriculture to the present time.

Groundwater in the Ellwood-Gaviota area is produced from wells which tap bedrock aquifers or alluvial sediments which have accumulated along canyon floors. Land uses supported by this pumpage include the Exxon Los Flores Canyon oil processing facility, the Chevron Gaviota oil processing facility, residential development and agriculture at

the El Capitan Ranch, the El Capitan and Refugio State Parks, the Tajiguas Municipal Landfill and several large avocado orchards. A detailed land use and water demand survey of this area has not been conducted. Water resources are evaluated by the County on a project-by-project basis during the review of applications for discretionary and ministerial County land use permits. The Environmental Thresholds and Guidelines Manual (Baca, 1995) describes the adopted County methodology for estimating the Safe Yield of bedrock aquifers.

### ***Gaviota to Point Conception Groundwater Area***

This Area encompasses about 36 square miles between the crest of the Santa Ynez Mountains and the Pacific Ocean. It is located west of the Ellwood to Gaviota Area described in the previous section. The geologic structure and hydrology of the Gaviota to Point Conception and the Ellwood to Gaviota Groundwater Areas are nearly identical. The primary difference between the two is that the Santa Ynez Mountains are lower within the Gaviota to Point Conception area. As a result, there is less annual precipitation, less runoff and less recharge to the aquifer.

Groundwater is the only water supply source within the area. The primary land use within the area is ranching and some limited agriculture. A number of remote ranch homes are also present in this area. A detailed land use and water demand survey of this area has not been conducted. Water resources are evaluated by the County on a project-by-project basis during the review of applications for discretionary and ministerial County land use permits. Environmental Thresholds and Guidelines Manual describes the adopted County methodology for estimating the Safe Yield of bedrock aquifers.

## Conclusions

The Groundwater Basins of Santa Barbara County are relied upon extensively as a source of water for both municipal and agricultural uses and as such need to be protected and conserved. In regard to quality and balance, the South Coast Basins are in relatively good shape as they are managed through conjunctive use and the Goleta basin is adjudicated. The Lompoc Groundwater Basin is also managed. However, other Groundwater Basins in Northern Santa Barbara County are not managed and are in a state of overdraft. The Santa Ynez Uplands and Santa Maria Groundwater Basins are in a state of slight overdraft (although the determination through the recent litigation was that the Santa Maria Groundwater Basin is currently in equilibrium, please see page 85), and the San Antonio and Cuyama Groundwater Basins are severely overdrafted.

The Water Agency is currently working with the United States Geological Survey on a water availability study for the Cuyama Groundwater Basin that will assess both current conditions as well as future conditions to be expected under differing climatic and cultural scenarios. The study will be completed in 2012. Consideration should be given to initiate similar studies for other basins on the basis of need. The highest priority would most likely be the San Antonio Groundwater Basin, where like the Cuyama Groundwater Basin groundwater is the sole source of water. The recent litigation and settlement of the Santa Maria Groundwater Basin has resulted in the formation of the Twitchell Management Authority which is currently working on expanded water monitoring and conservation measures for the Basin. Through this process, it is intended that issues of overdrafting will be addressed and eliminated. Even a slight overdraft can be harmful to groundwater basins as it can lead to water quality impairments.

The 2006 through 2008 period was relatively dry with only minor amounts of recharge to groundwater basins gained in the Spring of 2006 and Winter of 2008. The last significant recharge year was 2005 thus in most areas of the County water levels in groundwater basins have declined since 2006. It is important to note that in some areas with deeper aquifers there is a three to four year lag time between substantial rainfall and recharge (or lack thereof) and when the water levels change in the aquifer. Analysis of cumulative departure from mean precipitation and climatic indicators such as the Pacific Decadal Oscillation and Dendrochronology indicate that the area should be prepared for dry periods in excess of those seen in the past 30 years.

The County Public Works Department and the United States Geological Survey will continue the cooperative water resources monitoring program providing groundwater depth and quality (as well as surface water flow and quality) to evaluate trends in water resources throughout the County.



## References

Ahlroth, J., Santa Maria Ground Water Budget Status, Santa Barbara County Water Agency memorandum, August 26, 1992.

Ahlroth, J., Lompoc Groundwater Basin: Update of Long-Term Storage Changes and Overdraft Status, Santa Barbara County Water Agency memorandum, October 21, 1998.

Ahlroth, J., *Personal Communication*, February, 2002.

Almy, R., Ahlroth, J. and Holland, P., Revisions to the Buellton Uplands Groundwater Basin Report, Santa Barbara County Water Agency memorandum, 1995.

Arnold and Anderson, Geology and Oil Resources of the Santa Maria Oil District, Santa Barbara County, California, U.S. Geological Survey Bulletin 322, 1907.

Baca, Brian R., Carpinteria Groundwater Basin Supply/Demand: Alternatives to be presented to the Santa Barbara County Planning Commission, Santa Barbara County Resource Management Department, April 4, 1991.

Baca, Brian R., and Ahlroth, J., San Antonio Basin: Update of Supply/Demand Status, Santa Barbara County memorandum, July 9, 1999.

Baca, Brian R., More Ranch Groundwater Basin, Santa Barbara County Resource Management Department memorandum, November 3, 1993.

Baca, Brian R., Planning Implications of the Water Conveyance Agreement between the City of Santa Barbara and the La Cumbre Mutual Water Company, Santa Barbara County Resource Management Department memorandum, February 9, 1993.

Baca, Brian R., and Ahlroth, J., Groundwater Basin Status for the City of Santa Barbara and Goleta Areas, Santa Barbara County Resource Management Department memorandum, July 28, 1992.

Baca, Brian R., Geology and Safe Yield of the Buellton Uplands Groundwater Basin, Santa Barbara Planning and Development Department memorandum, compiled July 1994.

Bachman, Steven, Montecito Water District Future Water Demand and Supply Options, 2007.

Bright, D.J., Stamos, C.L, Martin, P., Nash D.B., Ground-Water Hydrology and Quality in the Lompoc Area. Santa Barbara County. California. 1987-88, U.S. Geological Survey Water Resources Report 91-4172, Sacramento, California, 1992.

Brown and Caldwell, Development of a Nonpoint Source Pollution Control Program for the Santa Maria Valley, 1976.

Brown and Caldwell, Montecito County Water District Water Supply Management, 1978.

California Department of Water Resources, Ground Water in the Arroyo Grande Area, 1975.

California Department of Water Resources, Southern District, Water Resources of the Arroyo Grande – Nipomo Mesa Area, 2002.

California Department of Water Resources, Compilation of Federal and State Drinking Water Standards and Criteria, Quality Assurance Technical Document 3, 1995.

California Regional Water Quality Control Board, Assessment of Nitrate Contamination in Ground Water Basins of the Central Coast Region Preliminary Working Draft, Central Coast Region, 1995.

Cachuma Resource Conservation District, San Antonio Creek Coordinated Resource Management Plan, 2003.

CH2MHILL, Basin Status Report for the Goleta Groundwater Basin, 2005

City of Santa Barbara Water Department, City of Santa Barbara Long Term Water Supply, 1994.

Cosby, P .G., Santa Barbara County Growth Inducement Potential of State Water Importation, Santa Barbara County Water Agency, 1991.

Dames & Moore, Santa Barbara County Comprehensive Plan, Final Program EIR. Groundwater Section Conservation Element, 1993.

Evanson et al., Yield of the Carpinteria and Goleta Ground-Water Basins, Santa Barbara County, California, U.S. Geological Survey Open File Report, 1962.

Evanson and Miller, Suitability of Irrigation Water and Changes in Ground-Water Quality in the Lompoc Subarea of the Santa Ynez River Basin, Santa Barbara County, California, U.S. Geological Survey Open File Report, 1963.

Evanson and Worts, Hydrologic Inventory of the Lompoc Subarea, Santa Ynez River Basin, Santa Barbara County, California, U.S. Geological Survey Open File Report, 1966.

Freckleton, John R., Geohydrology of the Foothill Ground-Water Basin near Santa Barbara, California, U.S. Geological Survey Water Resources Investigation Report 89-4017, Sacramento California, 1989.

Fugro West Inc., Carpinteria Groundwater Basin, Annual report for 2008, 2009.

Geotechnical Associates Inc., Hydrogeologic Investigation Montecito Ground Water Basins, 1974.

Geotechnical Associates Inc., Hydrogeologic Update Carpinteria Groundwater Basin, 1986.

Goleta Water District, *Personal Communication*, 1992.

Hoover, Michael F., Hydrologic Summary of the Carpinteria, Montecito, and Santa Barbara Water District Service Areas for Santa Barbara Regional Water Reclamation, Santa Barbara, California, 1980.

- Hoover, Michael F., Safe Yield Evaluation of the Montecito Basin and Toro Canyon Area, Santa Barbara, California, 1980.
- Hopkins, Curtis, Hydrogeological Review of the Santa Maria Valley Groundwater Basin Water Budget Models, Dated 2000, Santa Barbara County, California, 2002.
- Hughes, Jerry L., Evaluation of Ground Water Quality in the Santa Maria Valley, California, U.S. Geological Survey, Water-Resources Investigation 76-128, 1977.
- Hutchinson, C.B., Appraisal of Ground-Water Resources in the San Antonio Creek Valley, Santa Barbara County, California, U.S. Geological survey Water-Resources Investigations Open-File Report 80- 750, 1980.
- LaFreniere, G.F. and French, J.J., Ground-Water Resources of the Santa Ynez Upland Ground Water Basin, Santa Barbara County California, U.S. Geologic Survey, 1968.
- Lippincott, J.B., Report on Water Conservation and Flood Control of the Santa Maria River in Santa Barbara and San Luis Obispo Counties, 1931.
- Luhdorff & Scalmanini Engineers, Development of a Numerical Ground-Water Flow Model and Assessment of Ground–Water Basin Yield, Santa Maria Valley Ground-Water Basin, March 2000.
- Mann, John F., Safe Yield of the Goleta Ground Water Basin, 1976.
- Martin, Peter, Ground-Water Monitoring at Santa Barbara, California: Phase 2 – Effects of Pumping on Water Levels and on Water Quality in the Santa Barbara Ground-Water Basin, U.S. Geological Survey Water Supply Paper 2197, 1984.
- Michaelsen and Haston, Reconstruction of the flows of the Santa Ynez River at Bradbury Dam, Santa Barbara County California 1537-1964, 1998.
- Miller, G .A. and Rapp J .R., Reconnaissance of the Ground- Water Resources of the Ellwood-Gaviota Area, Santa Barbara County, California, U.S. Geological File Report, 1968.
- Miller, Groundwater Resources in the Lompoc Area, Santa Barbara County, California, U.S. Geological Survey Open File Report 76-183, 1976.
- Miller and Evanson, Utilization of Groundwater in the Santa Maria Valley Area, California, USGS Water Supply Paper 1819-A, 1966.
- Morro Group, The, Review of Groundwater Conditions in the Northern Santa Maria Basin and Scenarios for the Evaluation of Impacts of Development on the Water Resources of Nipomo Mesa, Appendix A, , 1990.
- Muir, K.S., Geology and Ground Water of San Antonio Creek Valley Santa Barbara County California, U.S. Geological Survey Water Supply Paper 1664, 1964.
- Muir, K.S., Ground-Water Reconnaissance of the Santa Barbara-Montecito Area, Santa Barbara County, California, U.S. Geological Survey Water Supply Paper 1859-A, 1968.
- Pierotti, B. and Levy, R., Evaluation of Groundwater Overdraft in the Southern Central Coast Region, 1998.

Santa Barbara County Flood Control, 1996 Precipitation Report, 1996.

Santa Barbara County Planning & Development Department, Santa Barbara County Comprehensive Plan, Conservation Element, Groundwater Resources Section, 1994.

Santa Barbara County Planning and Development Department, Environmental Thresholds and Guidelines Manual, 1995.

Santa Barbara County Resource Management Department, Orcutt Community Plan Update Proposed Final Environmental Impact Report (95 EIR-01), 1995.

Santa Barbara County Water Agency, Adequacy of the Groundwater Basins of Santa Barbara County, 1977.

Santa Barbara County Water Agency, Santa Maria Valley Water Resources Report, 1994.

Singer, J.A. and Swarzenski, W.V., Pumpage and Ground-Water Storage Depletion in Cuyama Valley, California, 1947-66, U.S. Geological Survey Open File Report, 1970.

Slade, Richard C., Original Report and Addendum Hydrologic Assessment Determination of Groundwater in Storage within the Montecito Water District, 1991.

Solak, Mark, et al., Precipitation Augmentation Potential from Convection Band Seeding in Santa Barbara County, 1996.

Stetson Engineers Inc., Seventeenth Annual Engineering and Survey Report on Water Supply Conditions of the Santa Ynez River Water Conservation District, 1994-95, 1995.

Stetson Engineers Inc., Eighteenth Annual Engineering and Survey Report on Water Supply Conditions of the Santa Ynez River Conservation District 1995-1996, 1996.

Toups Corporation, Santa Maria Valley Water Resources Study, 1976.

Turner, K.M., Reliability of Storage Schemes, Tree Rings, and Hurst Phenomena, California Department of Water Resources, 1992.

Upton, JE, Geology and Groundwater Resources of the South Coast Basins of Santa Barbara County, California, U.S. Geological Survey Water-Supply Paper 1108, 1951.

Upton and Thomasson, Geology and Water Resources of the Santa Ynez River Basin, Santa Barbara County, California, Upton and Thomasson, U.S. Geological Survey Water Supply Paper 1107, 1951.

URS Corporation, Urban Water Management Plan Goleta Water District, 2005.

U.S. Geological Survey, Bulletin 322, 1907.

U.S. Geological Survey, Bulletin 222, 1946.

Wilson, H.D., Ground-Water Appraisal of the Santa Ynez River Basin, Santa Barbara County, California, 1957.

Woodring and Bramlette, Geologic Map of the Santa Maria District, Santa Barbara County, California, 1950.

Worts, G.F., Geology and Groundwater Resources of the Santa Maria Valley Area, California, U.S. Geological Survey Water Supply Paper 1000, 1951.



## Appendix A – Groundwater Monitoring Sites Listing

The following is a listing of water level monitoring sites for depth to groundwater which Santa Barbara County Water Agency funds. Most of the sites are in the unincorporated areas of the County. Individual cities and water districts fund many more sites. For data in those areas contact the individual agency.

To get record for a specific site listed below go to <http://nwis.waterdata.usgs.gov/usa/nwis/gwlevels> and query on the “site ID” field.

State Well Number	Locality	USGS Site ID
4N/28W-2P3	Tuckers Grove Park; E	342709119471401
4N/28W-16J5	S Patterson; Luv Plants	342539119483504
4N/30W-1G1	1st Grove: Las Varas R	342732119583101
5N/29W-31C1	Las Varas Cyn: Sespe	342838119573501
5N/30W-28R1	El Capitan Cyn: St Park	342845120010701
5N/30W-28R2	El Capitan Cyn: St Park	342847120010801
5N/30W-30N2	El Refugio Ranch	342850120040002
5N/30W-19E1	Grove W of Refugio Rd	343008120035801
6N/31W-13D1	Santa Ynez: nr Hyw 246	343623120061201
6N/31W-1P2	West of Refugio Road	343727120055801
6N/31W-1P3	West of Refugio Road	343728120055101
6N/30W-7G5	S Ynez off Meadowvale	343651120043401
6N/30W-7G6	S Ynez off Meadowvale	343651120043402
7N/30W-30M1	SY Upl: Long Cyn Loop	343921120051601
7N/30W-19H1	SY Upl: Long Cyn Loop	344028120041801
7N/30W-29N2	SY Upl N of Roblar Ave	343903120040701
7N/30W-16B1	Sedgewick Ranch	344127120023301
7N/30W-22E1	Bar-Go Ranch	344023120015101
7N/30W-27H1	Bar-Go Ranch	343935120010801
7N/30W-33M1	300 ft W of Mora Ave	343833120030901
7N/30W-32R1	NW Baseline-Mora Jct	343812120031701
6N/30W-9N1	SW Jct Hyw 154 & 246	343627120030801
7N/30W-24Q1	Starlane Ranch	343956119592401
7N/30W-35R1	Nr Starlane entrance rd	343809120000601
6N/30W-11G1	Happy Cyn: Westerly	343649120001801
6N/29W-7L1	N of Rd to Phillips Rnch	343646119583001
6N/29W-8P1	Phillips Ranch @ House	343632119573301
6N/29W-8P2	Phillips Ranch @ House	343632119573302
6N/29W-5A1	Phillips Ranch - North	343755119570901
6N/30W-1R3	Happy Canyon	343718119592001
6N/29W-6F1	Happy Cyn: Kastner	343746119583101
6N/29W-6G1	Happy Cyn: Kastner	343746119582201
7N/29W-29R1	Happy Canyon	343900119570201
7N/29W-29R2	Happy Canyon	343900119570301
5N/29W-1C1	San Marcos Ranch	343251119522201
6N/32W-2Q1	SYR Alluvial; Buellton	343719120124901
6N/31W-7F1	Buellton Upland Well	343655120111201
6N/31W-17F1	SYR Alluvial; Buellton	343609120101201
6N/31W-17F3	SYR Alluvial; Buellton	343608120101001

6N/31W-10F1	Fredenberg Cyn: Solvng	343656120080601
6N/31W-4A1	Ballard Cyn nr Solvang	343800120083001
7N/31W-34M1	Ballard Cyn nr Solvang	343824120081801
6N/31W-11D4	Alamo Pintado Road	343705120071001
6N/31W-2K1	Alamo Pintado Road	343741120064801
6N/31W-3A1	Hilltop West of Ballard	343759120072901
7N/31W-35K4	North of Ballard School	343826120065002
7N/31W-36L2	Refugio Rd N of Baseln	343831120055001
7N/31W-22A3	Foxen Cyn nr Los Olivos	344044120072801
7N/31W-23P1	Los Olivos: Matties Tav	344002120070001
8N/31W-25Q1	Neverland: Domestic#1	344418120053101
8N/31W-25Q2	Neverland: Well ZL3	344424120053301
8N/30W-30N1	Neverland: Well ZL2	344426120050701
8N/31W-36H1	Midland School	344354120051501
8N/30W-30R1	Midland School	344420120041701
7N/33W-28D3	W Santa Rita Valley	343946120215301
7N/33W-21N1	W Santa Rita Valley	343956120214001
7N/33W-21G2	Mid Santa Rita Valley	344025120211501
7N/33W-27G1	E Santa Rita Valley	343926120201001
7N/33W-27J1	E Santa Rita Valley	343923120200101
7N/33W-36J1	Drum Cyn - Santa Rosa	343824120175201
7N/33W-36J2	Drum Cyn - Santa Rosa	343825120174601
7N/32W-31M1	Drum Cyn - Santa Rosa	343821120173601
6N/32W-6K1	Drum Cyn - Santa Rosa	343739120171301
7N/32W-7B1	Drum Cyn - Santa Rosa	344215120170001
6N/34W-12C5	SYR Alluvial; Santa Rita	343735120245902
6N/32W-18H1	SYR Alluvial; Santa Rita	343613120164501
6N/32W-16P3	SYR Alluvial; Santa Rita	343544120151801
7N/34W-15P2	Uplands E of Hyw 1	344100120270401
7N/34W-12E1	N of Mission Hills	344219120250601
7N/34W-15E1	Vandnbrg Village CSD	344134120272201
7N/34W-15D1	Vandnbrg Village CSD	344140120272301
7N/34W-15D2	Vandnbrg Village CSD	344140120272302
7N/34W-9H5	Vandnbrg Village CSD	344221120273501
7N/34W-9H6	Vandnbrg Village CSD	344221120273502
7N/34W-14F4	Mission Hills CSD	344126120255201
7N/34W-14L1	Mission Hills CSD	344117120255001
7N/33W-19D1	Lower Cebada Canyon	344035120235901
7N/33W-17N2	Upper Cebada Canyon	344051120224901
7N/33W-17M1	Upper Cebada Canyon	344100120224901
7N/33W-30B2	E Lompoc V: Valla Bros	343949120232901
7N/33W-20G1	W of Tularosa Road	344025120221601
7N/35W-24J4	At N end of Douglas Ave	344021120303504
7N/34W-30L10	SW cor Central & Leege	343941120300106
6N/34W-6C4	E of San Pasqual Rd	343815120300602
7N/34W-31R2	NW of Floradale-Ocean	343828120293201
7N/34W-29N6	E of Floradale: Bob Witt	343926120293001
7N/34W-29N7	E of Floradale: Bob Witt	343926120293002
7N/34W-29E4	E of Floradale: J Fischer	343948120292002
7N/34W-20K4	USPrison E of Floradale	344017120285502

7N/34W-32H2	E of Bailey: Wineman	343901120284201
7N/34W-27G6	E of North A Street	343949120264901
7N/34W-26H3	Eastern Lompoc Valley	343943120252201
7N/34W-22J6	E LV; W of Rucker Rd	344033120263404
7N/34W-24N1	Purisima Mission nr 246	344010120251601
7N/35W-18H1	Surf (N. side of Lagoon)	344135120355201
7N/35W-18J2	Surf (S. side of Lagoon)	344118120355902
7N/35W-17M1	Surf (near RR xing)	344114120353501
7N/35W-17Q6	Surf (old Barrier Bridge)	344110120351201
7N/35W-27C1	Ocean Ave & Renwick	344001120331401
7N/35W-22J1	W Valley: Jordan Farm	344021120324101
7N/35W-23E2	W Valley: Jordan Farm	344043120322402
7N/35W-23Q4	W Valley: Jordan Farm	344008120320901
7N/35W-23Q2	W Valley: Jordan Farm	344009120320402
7N/35W-23Q3	W Valley: Jordan Farm	344009120320403
7N/35W-26F4	W Valley: Jordan Farm	343948120320901
7N/35W-26L1	W of Union Sugar Ave	343929120321001
7N/35W-26L2	W of Union Sugar Ave	343929120321002
7N/35W-26L4	W of Union Sugar Ave	343929120321004
7N/35W-35A3	S Artesia Ave	343859120314003
7N/35W-24N3	N Artesia Ave: Beattie	344046120321401
7N/35W-23J5	N Artesia Ave	344025120313701
7N/35W-25F5	NW of DeWolf & Central	343947120310701
7N/35W-25F6	NW of DeWolf & Central	343947120310703
7N/35W-25F7	NW of DeWolf & Central	343947120310702
7N/35W-24K5	DeWolf Ave: Henning	344029120310305
6N/36W-26G1	South VAFB near SLC6	343426120380901
6N/36W-26C1	South VAFB near SLC6	343445120382601
6N/36W-01K1	South VAFB near SLC4	343755120372101
7N/35W-31J2	South VAFB: Bear Cyn.	343841120355202
7N/35W-32N1	South VAFB: Bear Cyn.	343831120354301
7N/35W-30G1	South VAFB - Wade Rd.	343944120361901
7N/35W-27P1	S. VAFB (Lom Terrace)	343923120332501
7N/35W-27F1	E. of So. VAFB entrance	343952120332001
7N/35W-27H1	E. of So. VAFB entrance	343948120330101
7N/35N-22M1	W of VAFB entrance N	344025120333401
7N/35W-21G2	AFB: 3300' NW of 22M1	344041120341101
7N/35W-23B2	N of SY River on VAFB	344048120320201
7N/35W-15M1	W. of 13th; N. of SY Rivr	344124120334401
10N/32W-19M2	Cuy. R. below Twitchell	345541120173001
9N/32W-6D1	Santa Maria Mesa Road	345323120173801
9N/32W-7A1	Santa Maria Mesa Road	345238120164701
9N/32W-17G1	Foxen Canyon Road	345129120160301
9N/32W-16L1	Foxen Canyon Road	345116120150601
9N/32W-22D1	Sisquoc Ranch Road	345053120163201
9N/32W-23K1	Hdqtrs: Sisquoc Ranch	345035120123501
8N/35W-12M1	Field N of S Antonio Rd	344650120312001
8N/34W-9K1	E of S20; N of Barka S	344712120273901
8N/34W-2M1	Hampton Farms Well	344802120255901
8N/34W-14L1	NE Jct Hyw 1-SA road	344624120253901

8N/34W-23B1	W of Hyw 1 @ SA crk	344546120252901
8N/34W-24E1	SE of Jct Hyws 1 & 135	344530120245201
8N/33W-19K1	30' S of Hyw 135	344530120231601
8N/33W-20Q2	SW Hyw135-Batchelder	344518120221002
8N/33W-22K3	Mid San Antonio Basin	344521120200801
8N/32W-30E5	Carrari .3 W of Los Ala	344441120172801
8N/32W-30D1	Field W of Los Alamos	344457120174001
8N/33W-13C1	Berringer N of office	344645120182401
8N/33W-13Q1	Berringer S of office	344609120180701
8N/32W-29L2	S of SkyView Motel	344437120161401
8N/32W-28P1	SE of Los Alamos	344417120151001
8N/32W-28P4	100' NW of 28P1	344417120151002
8N/32W-25D1	Alisos Cyn Rd NE of 101	344757120122101
8N/34W-17H1	N side Barka Slough	344633120281901
8N/34W-16C1	N side Barka Slough	344640120274401
8N/34W-16C2	N side Barka Slough	344640120274402
8N/34W-16C3	N side Barka Slough	344640120274403
8N/34W-16C4	N side Barka Slough	344640120274404
8N/34W-16F1	N side Barka Slough	344636120274201
8N/34W-16G3	N side Barka Slough	344626120272901
8N/34W-17E1	SW side Barka Slough	344630120290101
8N/34W-17K2	S side Barka Slough	344618120283201
8N/34W-17Q1	S side Barka Slough	344611120283001
8N/34W-21A1	S side Barka Slough	344550120273901
8N/34W-15F2	E of Barka Slough	344628120264201
8N/34W-15F4	E of Barka Slough	344628120264203
10N/33W-20H1	E of Philbric Road	345552120220001
10N/33W-21P1	W of Bradley Channel	345534120212001
10N/33W-28F2	W of Bradley Channel	345459120211901
10N/33W-28A1	Betteravia Rd @ big 90°	345523120204902
10N/33W-27G1	1 mile SE of 28A1	345458120200601
10N/33W-26N1	3000' WNW of Fugler Pt	345431120194201
10N/33W-35B1	1000' WNW of Fugler Pt	345424120191501
9N/33W-2A7	Andrew Ave; Garey, CA	345325120184201
9N/33W-12C1	.6 mi. SE of Garey, CA	345233120181001
9N/33W-12R2	W side Sisquoc, CA	345201120173901
9N/33W-6G1	Reservoir near Zimmerman	345326120231401
9N/33W-5A1	East of Telephone Rd	345337120215601
10N/33W-34E1	E of Dominion Road	345405120204701
9N/33W-24L1	Cat Cyn & Palmer Rds	345024120181801
9N/32W-33M1	Cat Canyon Road	344835120152701
9N/34W-3A2	SW Lakeview-Broadway	345340120261801
9N/34W-3F10	SM City: N of Foster Rd	345314120264101
10N/34W-14E4	SM City: downtown yard	345650120255901
10N/34W-14E5	SM City: downtown yard	345649120255201
10N/34W-26H2	E of McCoy Ln, nr 101	345459120250301
10N/33W-7M1	N of E Main St	345725120235701
10N/33W-7R1	E Main St: DeBernardi	345710120230801
10N/33W-7R6	E Main St: DeBernardi	345710120230802
10N/34W-13C1	Suey Rd; Rosemary Fm	345657120242901

10N/34W-13G1	Jones Rd; Rosemary fm	345644120241801
10N/34W-13H1	N of Jones @ Rosemary	345644120235801
10N/34W-13J1	Rosemary Rd @ Farm	345635120235901
10N/33W-18G1	E side Rosemary Farms	345645120231101
10N/33W-19B1	S side Stowell Road	345616120231001
10N/34W-24K1	SW Rosemary - Battles	345548120242202
10N/34W-24K3	SW Rosemary - Battles	345548120242201
10N/33W-19K1	N of Betteravia Road	345538120231101
10N/33W-30M2	S of Prell Rd in Ind. yard	345454120234501
10N/33W-30G1	Telephone and Prell	345459120232301
10N/33W-29F1	W of Prell jct Telephone	345459120222301
10N/35W-21B1	Mahoney Bros Farm	345621120340101
10N/35W-23M2	S of Brown Road	345544120322501
10N/35W-14P1	N of Brown Road	345624120320901
10N/35W-24B1	SW Jct Ray & Brown rd	345620120305201
10N/35W-24Q1	Ex B&W feedlot well	345538120304801
10N/35W-35J2	Field E of Hyw 1	345406120313501
10N/34W-29N2	Taylor Residence	345441120291301
9N/34W-6C1	Laguna Sanitation Yard	345330120300801
9N/34W-8H1	Hyw 1 nr Graymare Frm	345225120283101
9N/34W-9R1	Off end of Palomino Dr	345205120271801
10N/35W-7E5	North of 18F2 across rd	345801120362801
10N/35W-18F2	SW from Guadalupe	345659120362002
10N/35W-9N2	SW Main St - Hyw166	345725120342503
10N/35W-9E5	Guadalupe City Well	345750120343001
10N/35W-9F1	Guadalupe: Waller Seed	345751120340001
10N/35W-11E4	Silva Farm N of Hyw 166	345748120321901
10N/34W-6N1	E of Bonita School Rd	345818120300601
10N/34W-20H3	S of Stowell nr RR line	345604120282202
10N/34W-9D1	Adam Bros Farm	345800120280801
11N/35W-33G1	Division St @ RR Xing	345926120340001
11N/35W-28M1	E of Guadalupe dunes	350012120342601
11N/35W-28F2	Off of Division St.	350015120341001
11N/35W-20E1	Oso Flaco Lake Road	350107120353201
11N/35W-26M3	Off of Oso Flaco Rd. E	350011120302101
11N/35W-25F3	Division @ Bonita Road	350014120310501
11N/34W-30Q2	SE of Nipomo Mesa Rd	345950120294501
11N/34W-29R2	Southeast of 30Q1	345959120281901
10N/27W-11A1	N jct Aliso Rd - Hyw 166	345808119433501
10N/26W-18F1	.5 mi W of New Cuyama	345709119415501
10N/26W-20M1	New Cuyama CSD Well	345603119411901
10N/26W-20P1	New Cuyama CSD Well	345540119410901
10N/26W-16Q1	Russel Rnch nr Hyw166	345637119394701
10N/26W-21A1	S of H 166, E of 16Q1	345618119393701
10N/26W-9H1	Russel Ranch N of River	345800119393101
10N/26W-4R1	Russel Ranch N of River	345822119391801
9N/26W-1F3	Kiger Homestead Well	345325119365603
10N/25W-30F1	W of Kirchenmann Rd	345512119354101
9N25W-27C1	Reyes Ranch: SB Cyn	345023119322601
9N/25W-13B1	Farry: well nr gravel ops	345206119294701



9N/24W-32C1  
9N/24W-33M1

Clark well: Ventucopa  
Lambert well: Quatal Rd

344944119275701  
344910119270501


## Appendix B - Santa Barbara County Water Production

By Purveyor and Calendar Year

Year	City of Buell-ton	Golden State Water (Orcutt)	Carp. Water District	Cuy-ama CSD	Goleta Water District	City of Guad-alupe	La Cumbre Mutual Water	City of Lompoc	Los Alamos CSD	Mission Hills CSD	Mont-ecito Water District	City of Santa Barbara	City of Santa Maria	Santa Ynez River WCD	City of Sol-vang	Vand-enberg AFB	Vand-enberg Village CSD	Totals
1976	535	4330	5368	300	15844	845	1672	3416	158	500	3995	14463	8080	5409	1264	3795	1543	71517
1977	528	4849	5025	321	14867	781	1565	3327	158	500	3713	12718	7509	6643	1198	3796	1464	68962
1978	641	4621	4305	300	13785	722	1339	3282	161	500	3463	12404	7445	5063	1098	3353	1309	63791
1979	716	5099	4934	295	15405	666	1326	3596	205	500	3858	13719	8069	6006	1122	3278	1525	70319
1980	752	5608	5129	292	16034	762	1533	3753	230	583	4099	14543	8739	6527	1231	4026	1527	75368
1981	770	6109	5338	333	15610	738	1508	3607	211	492	4295	14095	8691	6517	1622	4330	1589	75855
1982	725	5508	4449	262	13331	675	1387	3596	211	417	3612	13475	8311	5343	1569	4169	1291	68331
1983	743	5714	3898	235	11896	733	1284	3618	179	416	3576	14439	8904	4447	1362	3375	1181	66000
1984	971	7079	6130	254	15796	961	2067	4447	240	570	5483	16826	10537	7885	1876	4211	1482	86815
1985	939	7276	5488	258	15344	908	1900	4525	230	522	4905	16335	10635	7159	2028	4063	1486	84001
1986	1057	7625	5068	275	14874	800	1827	5029	269	542	4789	16277	11039	6174	2028	3768	1485	82926
1987	1153	7916	5845	274	15290	757	2008	4884	262	569	4889	16140	11192	6327	1999	3717	1441	84663
1988	1204	8678	5986	218	15358	823	2209	5354	253	700	5314	16517	11848	6529	2153	3850	1577	88571
1989	1221	8860	6280	195	11451	828	1617	5612	256	694	5234	15067	12470	6742	2080	3793	1582	83982
1990	1083	8691	5362	189	10013	724	1298	4930	251	633	5034	9849	12057	6337	1963	3401	1438	73253
1991	955	8210	4055	182	9393	685	1166	4413	238	578	3779	9559	11478	5814	1852	3065	1342	66764
1992	964	8381	4315	173	11066	718	1320	4653	225	600	4025	10507	12074	5402	1868	4124	1401	71816
1993	958	8174	4312	168	11837	653	1321	4670	240	618	4420	11371	11835	7599	1871	4394	1380	75821
1994	918	8572	4489	169	10634	668	1555	4770	236	628	4368	12079	12133	5332	1807	4186	1287	73831
1995	896	8447	4314	181	13317	662	1542	4772	260	604	4155	12716	12265	5202	1611	3916	1293	76153
1996	923	9906	4298	191	12184	585	1648	5086	276	658	4702	13216	12323	6500	1641	4463	1356	79956
1997	991	9376	4635	213	14667	622	1632	5804	256	733	5369	14546	12796	6343	1686	4486	1523	85678
1998	806	8154	3985	165	11758	574	1337	5231	238	540	4200	12970	10665	4290	1425	3958	1291	71587
1999	897	9259	4442	189	12741	749	1849	5408	320	762	5538	13784	11851	6163	1533	4538	1467	81491
2000	975	8262	4379	190	13317	618	1546	4566	263	609	5112	13395	11231	5303	1532	4980	1233	77511

<b>2001</b>	991	8053	3901	183	12225	658	1399	4465	251	591	4473	12531	11155	5355	1559	4476	1201	73467
<b>2002</b>	1135	9464	4436	212	14851	782	2138	5625	344	632	5978	14353	13339	6479	1517	4521	1598	87404
<b>2003</b>	1146	9071	4215	178	12923	764	1880	5567	328	*602	5716	13649	13495	5734	1455	4471	1504	82096
<b>2004</b>	1258	9331	4899	192	14830	*748	2142	5932	368	772	6592	14234	13650	6026	1596	4267	1619	87708
<b>2005</b>	1188	10129	4633	176	14326	788	1723	5032	362	697	5734	13178	13857	5216	1454	3892	1479	83864
<b>2006</b>	1260	8770	4289	168	13220	882	1856	5079	362	671	5887	13320	13671	5350	1490	3716	1521	81512
<b>2007</b>	1305	9727	4024	186	15759	*748	2316	5653	362	718	7158	15007	14902	6357	1677	3925	1729	90805
<b>2008</b>	1371	9329	3916	172	15057	1045	2275	5476	357	718	7085	14357	14278	6272	1573	3925	1627	88833
<b>Avg</b>	969	7836	4732	221	13606	702	1672	4702	259	584	4865	13686	11289	5995	1628	4007	1448	78202
<b>Max</b>	1371	10129	6280	333	16034	1045	2275	5593	368	772	7158	16826	14902	7885	2153	4980	1627	90805
<b>Min</b>	528	4330	3898	165	9393	574	1166	3282	158	416	3463	9559	7445	4290	1098	3065	1181	63791

\*No report thus average used

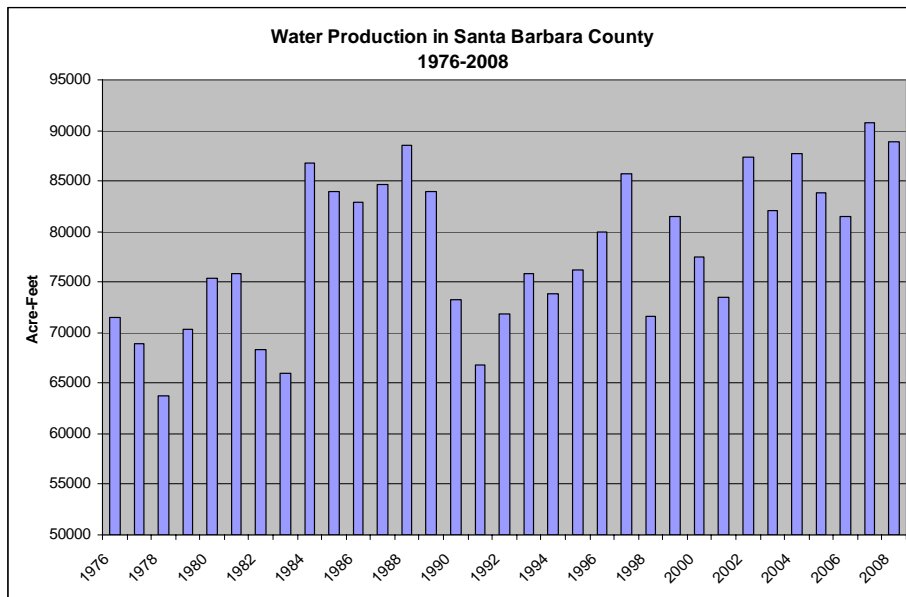

## Appendix C - Santa Barbara County Groundwater Basins Summary

Basin	Size	Estimated basin SAFE YIELD		Estimated Net Demand on groundwater (AFY)	Surplus/ (Overdraft) (AFY)	Available Water in Storage (AF)	Land Use Summary
		For gross Pumpage (Perennial Yield) (AFY)	For Net Pumpage (Net Yield) (AFY)				
Carpinteria	6,700 acres	4,294	3,865	3,750 (Pumpage level assumes that all available surface supplies are utilized.)	126	16,000	One city, orchards, irrigated crops and greenhouses
Montecito	4,300 acres	1,350	1,215	Pumpage not required due to surplus surface supplies.	0	7,700	Primarily low-density residential use; unincorporated
Santa Barbara	4,500 acres	1,400	1,120	Pumpage not required due to surplus surface supplies. Basin managed by City of S.B.	2,838 (Based on overall City supply.)	10,000	Primarily residential, industrial and commercial
Foothill	3000 acres	953	905	898 (Maximum long-term pumpage. Basin managed by City of S.B.)	Not subject to overdraft per SB/LCMWC agreement.	5,000	Primarily residential
Goleta North/Central	5700 acres	3,700	3,420	3,420	Not subject to Overdraft per Court decision.	45,000	Primarily residential, industrial and commercial. <b>Basin has been adjudicated and is not subject to overdraft.</b>
Goleta West	3500 acres	500	475	220	255	7,000	Primarily residential, industrial and commercial.
Buellton Uplands	16,400 acres	3,740	2,768	1,932	800	154,000	Extensive agriculture; one city
Santa Ynez Uplands	83,200 acres	11,500	8,970	10,998	(2,028)	900,000	Three towns, one city, and other low density residential; varied, high-value agriculture
Lompoc	48,600 acres	28,537	21,468	22,459	(913)	170,000	One city, unincorporated urban development, Vandenberg AFB; varied agriculture; petroleum

Basin	Size	Estimated basin SAFE YIELD		Estimated Net Demand on groundwater (AFY)	Surplus/ (Overdraft) (AFY)	Available Water in Storage (AF)	Land Use Summary
		For gross Pumpage (Perennial Yield) (AFY)	For Net Pumpage (Net Yield) (AFY)				
San Antonio	70,400 acres	20,000	15,000	24,540	(9,540)	800,000	One town; extensive agriculture; some petroleum; VAFB
Santa Maria	110,000 acres (80,000 within Santa Barbara County)	120,000	80,000	100,000 (87,500 with City of Santa Maria reduction in pumpage due to SWP supply.)	(2,368)	1,100,000	Two cities; extensive unincorporated urban area (Santa Barbara County); extensive irrigated agriculture; petroleum
Cuyama	441,600 acres (81,280 within Santa Barbara County)	10,667	8,000	36,525	(28,525)	1,500,000	Extensive agriculture; some petroleum; very low population density
SPECIAL BASINS/LIMITED DATA							
More Ranch	502 acres	84	76	24	60	N/A	Primarily open space, limited residential/agricultural
Ellwood to Gaviota Coastal Basins	67,200 acres		N/A	N/A	N/A	N/A	Agriculture, primarily orchards and grazing; limited municipal/industrial
Gaviota to Pt. Conception Coastal Basins	23,040 acres		N/A	N/A	N/A	N/A	Agriculture, primarily grazing
Santa Ynez River Riparian Basins	12,000 acres (3 sub-units)		N/A	N/A	N/A	Annual average flow exceeds storage capacity	Two cities; 7,300 acres of irrigated cropland